

HIOKI

Field Measuring Instruments




2022

Field-Proven Strength.

Measurement • Protection • Advancement


Since 1935



In our mission to provide measurement technologies that protect the safety of society, we seek to contribute to the advancement of a brighter and more prosperous future.

Hioki's measurement technology is widely used in the maintenance, repair and operation of factories, businesses and infrastructures, contributing to the safety and security of our daily lives.

We also support the development of next generation technologies in the automotive and new energy sectors by delivering high quality instruments at a reasonable cost.

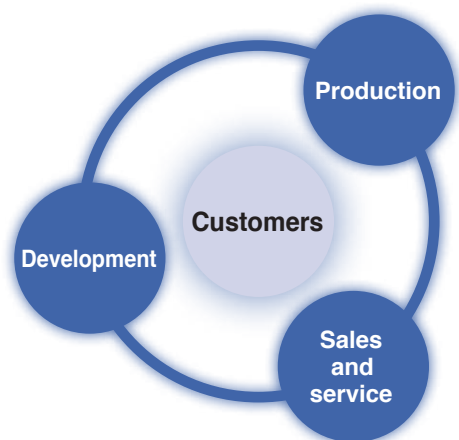

Founded in 1935, Hioki has grown to become a world leader in providing consistent delivery of test and measuring instruments. By integrating both R&D and manufacturing in a central facility, we succeed in implementing a fully sustainable end-to-end product innovation life cycle to deliver instruments characterized by precision, safety and quality to customers around the world.

HIOKI, an R&D-focused company

Technology advances on a daily basis, making possible safer and more comfortable human lifestyles and helping make dreams come true. The measuring instruments that underpin these advances also continue to evolve. To develop electrical measuring instruments that meet the changing needs of our times, one-third of all HIOKI employees work in research and development, an area where we invest approximately 10% of all revenue.

Pursuing agile production

HIOKI works to implement optimal production structures that are capable of meeting changing market needs with high-quality products. Due to the nature of electrical measuring instruments, which serve as yardsticks for measuring electricity, it is necessary to ensure a high level of quality in their production. Working with the cooperation of suppliers, we continuously strive to ensure our manufacturing operations conform to the world's highest standards of product quality.

Practicing customer-centric sales

Working with distributors, we actively visit customers to resolve their concerns. Information obtained during these visits is also utilized in product development, laying the groundwork for our ability to create products that satisfy our customers.



ISO 14001 / ISO 9001 certified

ISO14001 : The HIOKI head office is certified under the ISO14001 international standard for environmental management systems.

ISO9001 : HIOKI's development, production, sales and service (repair and calibration) of electric measuring instruments are certified under the ISO9001 international standard for quality management and quality assurance.



Contents

About the Catalog	pp. 2-3
Applications	pp. 4-9
Manage Measurement Data on Tablets and PCs		
GENNECT Cross, GENNECT One	pp. 10-11
Calibration, Adjustment and Repair Service	pp. 56-57

Clamp Meters	pp. 12-21	Clamp
Insulation Testers	pp. 22-27	Insulation
DMMs	pp. 28-35	Tester
Phase Detectors Voltage Detectors	pp. 36-37	Detectors
Earth Testers	pp. 38-39	Earth
Power Quality Analyzers (Options)	pp. 40-41 pp. 44-45	Power quality
Power Consumption Meters (Options)	pp. 42-43 pp. 44-45	Power consumption
Battery Testers	pp. 46-47	Battery
PV Maintenance	p. 48	PV
Data Loggers	pp. 49-52	Logger
LAN Cable Testers	p. 53	LAN
Signal Generators	p. 53	Signal
Lux Testers	p. 54	Lux
Temperature Testers	p. 54	Temperature
Sound Testers	p. 55	Sound















About the Catalog
















About the Marks

	Compliant with CE
	New release



*Android, Google Play and the Google Play logo are trademarks of Google Inc.
 *iOS is a registered trademark of Cisco Technology, Inc. and/or its affiliates in the United States and certain other countries.
 *iPhone, iPad, iPad mini, iPad Pro and iPod touch are trademarks of Apple Inc.
 *Apple and the Apple logo are trademarks of Apple Inc. App Store is a service mark of Apple Inc.
 *Microsoft, Windows, Windows Vista, and Excel are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.
 *Company names and Product names appearing in this catalog are trademarks or registered trademarks of various companies.
 *The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by HIOKI E.E. CORPORATION is under license.
 *For the latest information about countries and regions where wireless operation is currently supported, please visit the Hioki website.


	Safety standard measurement categories*
	Drop proof Robust design capable of withstanding a drop from a height of 1 m onto concrete
	Backlight
	Auto power OFF Automatically turns off after a certain time
	Display hold
	True RMS True RMS measurement for accurate measurement of even distorted current waveforms
	Low-pass filter Cuts high frequency content to provide stable numerical values for measurement
	AUTO AC/DC Automatically detects and measures AC and DC voltage
	Decibel conversion Displays AC voltage measurements converted to decibel values (dbm/dbv)
	MAX/MIN/AVG value* Displays the maximum, minimum, and average of the displayed values
	Peak measurement* Displays the wave maximum and minimum peak values
	Relative display Pressing the REL button displays subsequent measurements as values relative to that displayed when the button was pressed
	Current sensor can be connected
	Flexible current sensor can be connected

	AC voltage
	DC voltage
	DCV + ACV
	Frequency
	Resistance
	Capacitance
	Temperature
	ACA current
	DCA current
	DCA + ACA
	DC Power
	Continuity check Buzzer sounds when continuity is detected
	Diode check Displays voltage if in the correct direction, and OVER if in the reverse direction
	Voltage detection Buzzer sounds when AC voltage is detected
	Inrush (Rush current) Measures inrush current when power is turned on, etc.

*For more detailed information, please refer to the next page.

Measurement Category · Anticipated Transient Overvoltage

Under safety standards (EN61010 Series, JIS C 1010 Series), measurement is classified into Categories II to IV according to the measurement point's rated voltage to ground, current capacity (size of current that flows in a short-circuit fault), etc., and the transient overvoltage that occurs at the measurement point.

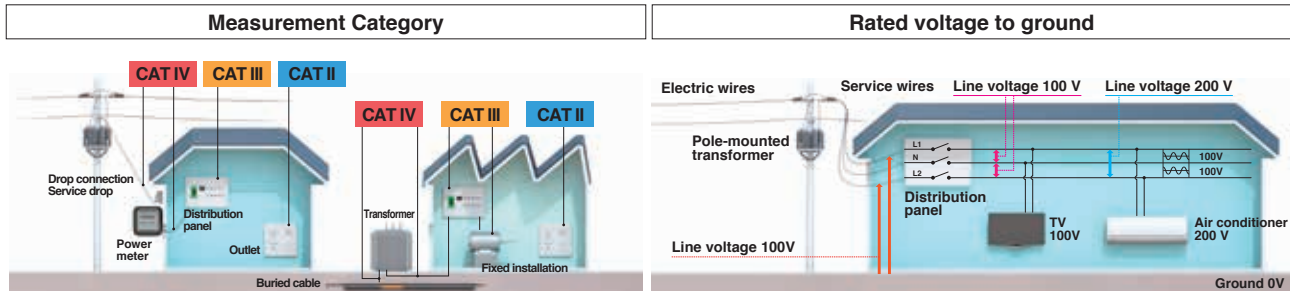

- CAT II :** Measurement at a point from the power plug to the equipment's power circuits, where equipment is directly connected to an outlet.
- CAT III :** Measurement at a point on the power distribution cabling or power supply circuits, or at a point from the distribution panel to a distribution terminal behind an outlet, where equipment (for example a fixed installation) takes electricity directly from a distribution panel.
- CAT IV :** Measurement at a point on a service drop to a building, or on the line from the drop connection to the power meter or distribution panel.

Anticipated Transient Overvoltage

Rated voltage to ground	Transient overvoltage		
	CAT II	CAT III	CAT IV
300 V	2500 V	4000 V	6000 V
600 V	4000 V	6000 V	8000 V
1000 V	6000 V	8000 V	12000 V

Power lines in factories and similar facilities will at times include transient overvoltage (impulse voltage) that is around 10 times the power source voltage. The transient overvoltage of the measurement points must be predicted in advance, and the instrument will need a safety design that will enable it to withstand such overvoltage.

Marks


CAT IV **600V**
Measurement Category Rated voltage to ground

Assuming 600 V for the measurement point's voltage to ground, a Category IV location could potentially include transient overvoltage of 8000 V. Hence, CAT IV measurement instruments are designed to withstand transient overvoltage of 8000 V. CAT III measurement instruments can only withstand up to 6000 V, so if 8000 V transient overvoltage enters, it will cause insulation breakdown that could result in electric shock.

Never measure a measurement point with a higher category number than the category indicated on the measuring instrument. Doing so could lead to a serious accident such as electric shock.


Rectification Methods: True RMS and Mean

A measuring instrument uses one of two rectification methods, "True RMS" or "Mean". Using mean rectification assumes that the signal is based on a sine wave without distortions in order to calculate the value. Distorted waveforms cannot be measured accurately using this method. As the performance of equipment increases, so do distorted waveforms. In order to accurately measure in these situations, using the True RMS method is necessary.

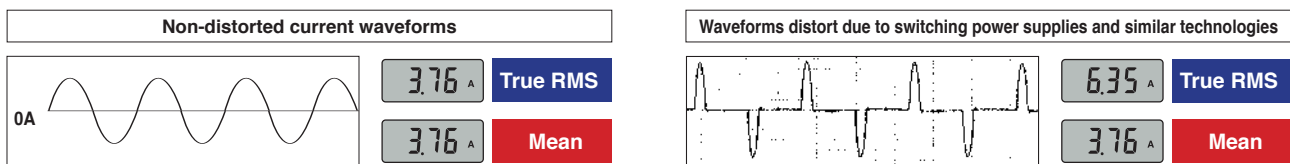


Low-Pass Filter Reduces the Effects of Harmonics and Measures the Fundamental Wave Component Accurately

Switching power supplies and the secondary side of inverters include harmonic components. Waveforms containing harmonics are distorted and difficult to measure with accuracy. By using a low-pass filter to remove harmonic components, accurate measurement values can be obtained.

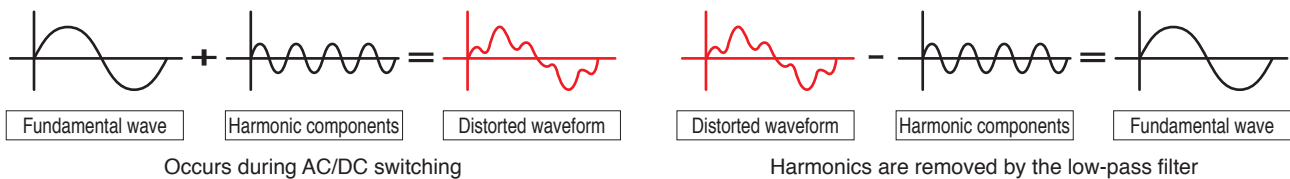


MAX/MIN/AVG/PEAK value

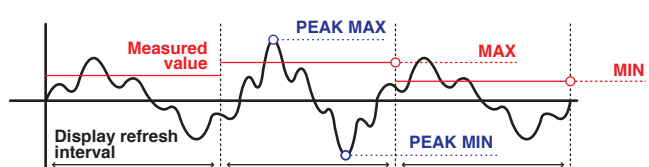

The ability to identify the maximum, minimum, average, and crest maximum and minimum values for equipment like machine tools whose load current fluctuates is useful in preventive maintenance and quality control.

Applications Factory

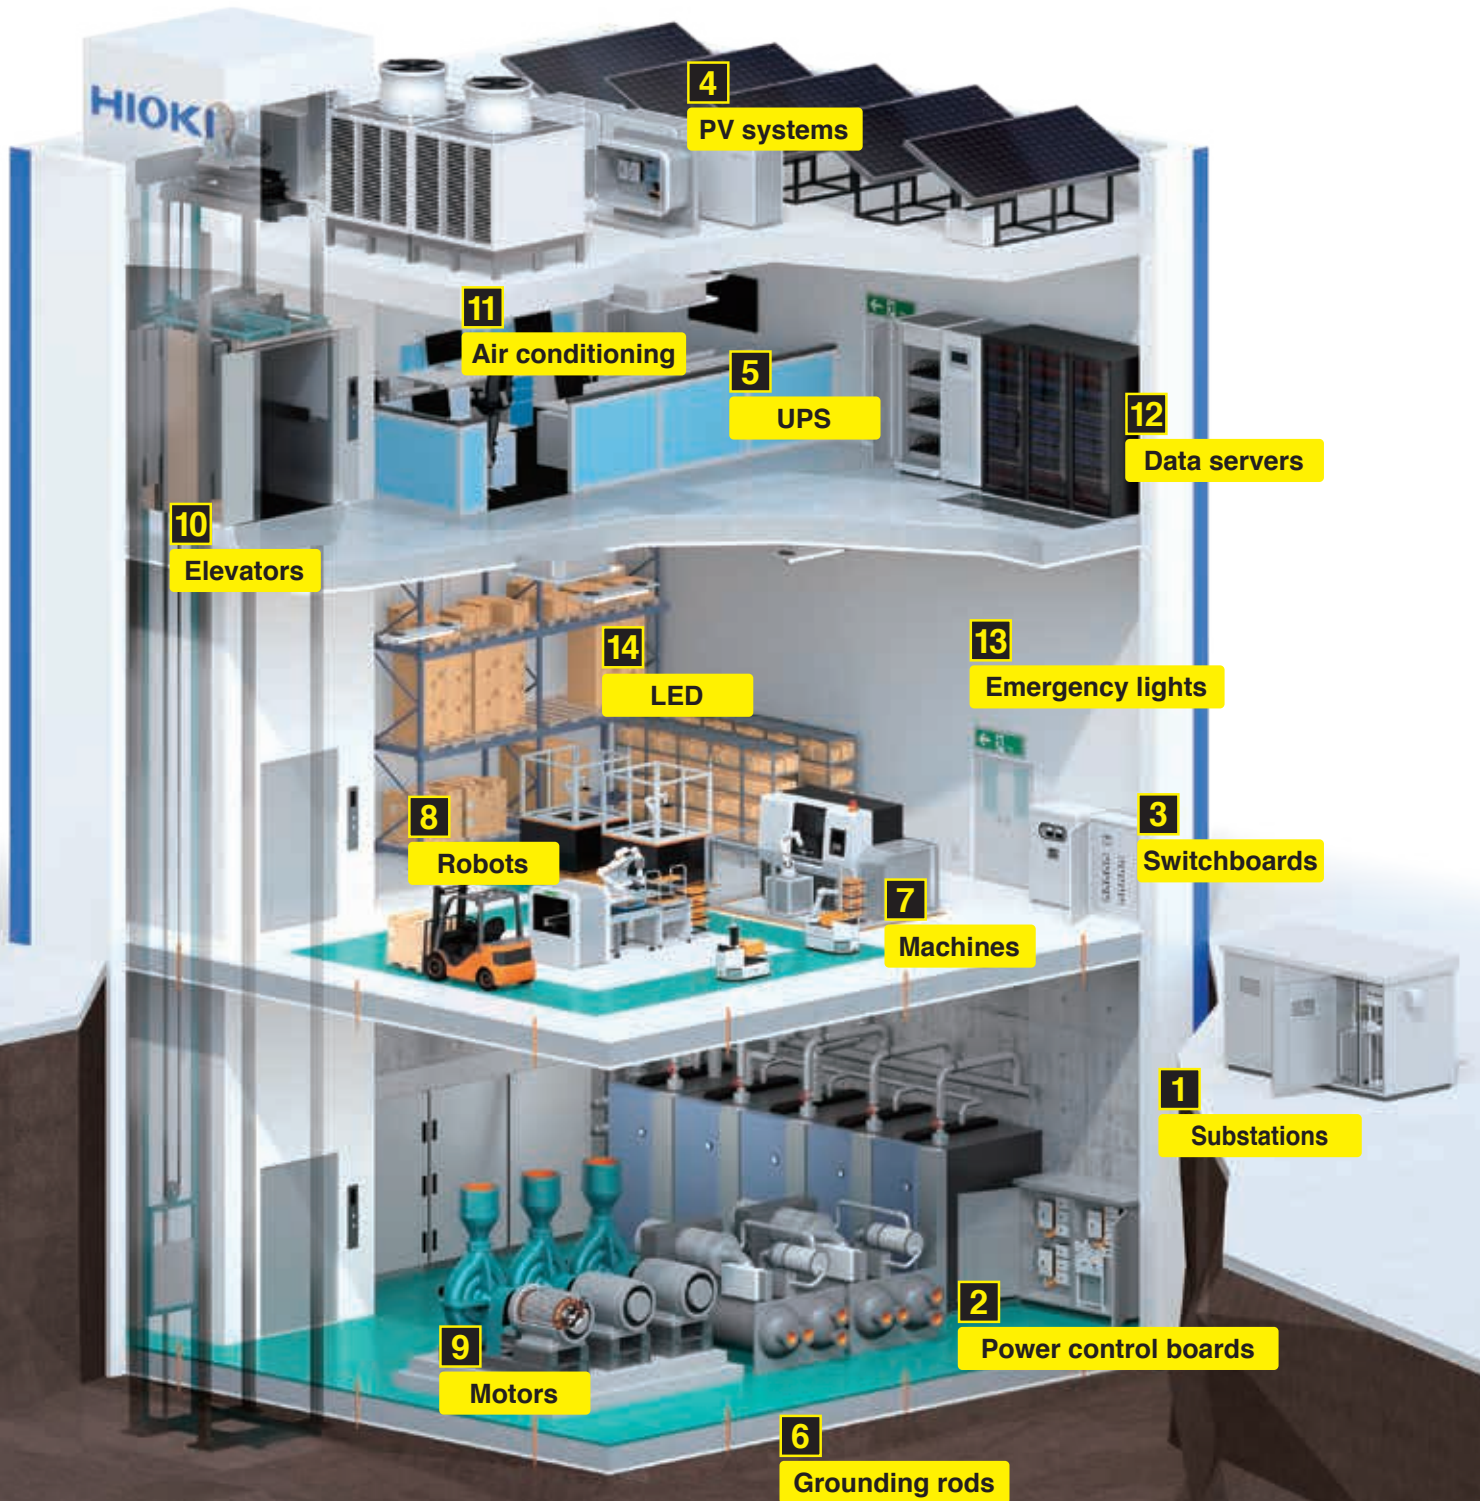

1 2 3

Power receiving and transforming equipment • Power Control Boards • Switchboards

Verify phase rotation	Test insulation	Test supply voltage	Verify load current	Detect leakage current	Detect electrical disturbances • Analyze power quality	Record and analyze electrical consumption	Test 5kV insulation
PD3259 (pp. 36-37) PD3129 (pp. 36-37)	IR405Xs (pp. 22-27)	DT42XXs (pp. 28-35)	CM437Xs (pp. 12-21) CM414Xs (pp. 12-21)	CM4001 (pp. 12-21) CM4002 (pp. 12-21) CM4003 (pp. 12-21)	PQ3100 (pp. 40-45) PQ3198 (pp. 40-45)	PW3360 (pp. 42-45) PW3365 (pp. 42-45)	IR3455 (p. 27)

4

PV systems

Test bypass diodes	Verify grounding	Test PV insulation	Verify string current	Verify string current	Test battery resistance and voltage	Verify grounding
FT4310 (p. 48)	FT6031 (pp. 38-39)	IR4053 (pp. 22-27)	DT4261 + P2000 (pp. 28-35)	CM437Xs (p. 12-21) CM414Xs (p. 12-21)	BT3554 (pp. 46-47)	FT6031 (pp. 38-39)

5

UPS

6

Earth • Ground

7 8 9

Machines • Robots • Motors

Test supply voltage	Test load current	Check temperature	Verify motor insulation	Test supply voltage	Test load current	Verify phase rotation
DT425Xs (pp. 28-35) DT428Xs (pp. 28-35)	CM437Xs (pp. 12-21) CM414Xs (pp. 12-21)	FT3700 (p. 54) FT3701 (p. 54)	IR405Xs (pp. 22-27)	DT425Xs (pp. 28-35) DT428Xs (pp. 28-35)	CM437Xs (pp. 12-21) CM414Xs (pp. 12-21)	PD3259 (pp. 36-37) PD3129 (pp. 36-37)

10

Elevators

11

Air conditioning

Check temperature and humidity	Check temperature	Test insulation	Test supply voltage	Test load current	Verify LAN wiring	Measure illuminance
LR5001 (pp. 49-52) LR8514 (pp. 49-52)	FT3700 (p. 54) FT3701 (p. 54)	IR405Xs (pp. 22-27)	DT425Xs (pp. 28-35) DT428Xs (pp. 28-35)	CM437Xs (pp. 12-21) CM414Xs (pp. 12-21)	3665 (p. 53)	FT3424 (p. 54) FT3425 (p. 54)

12


Servers

13 14

Emergency lights

Applications

Data Centers

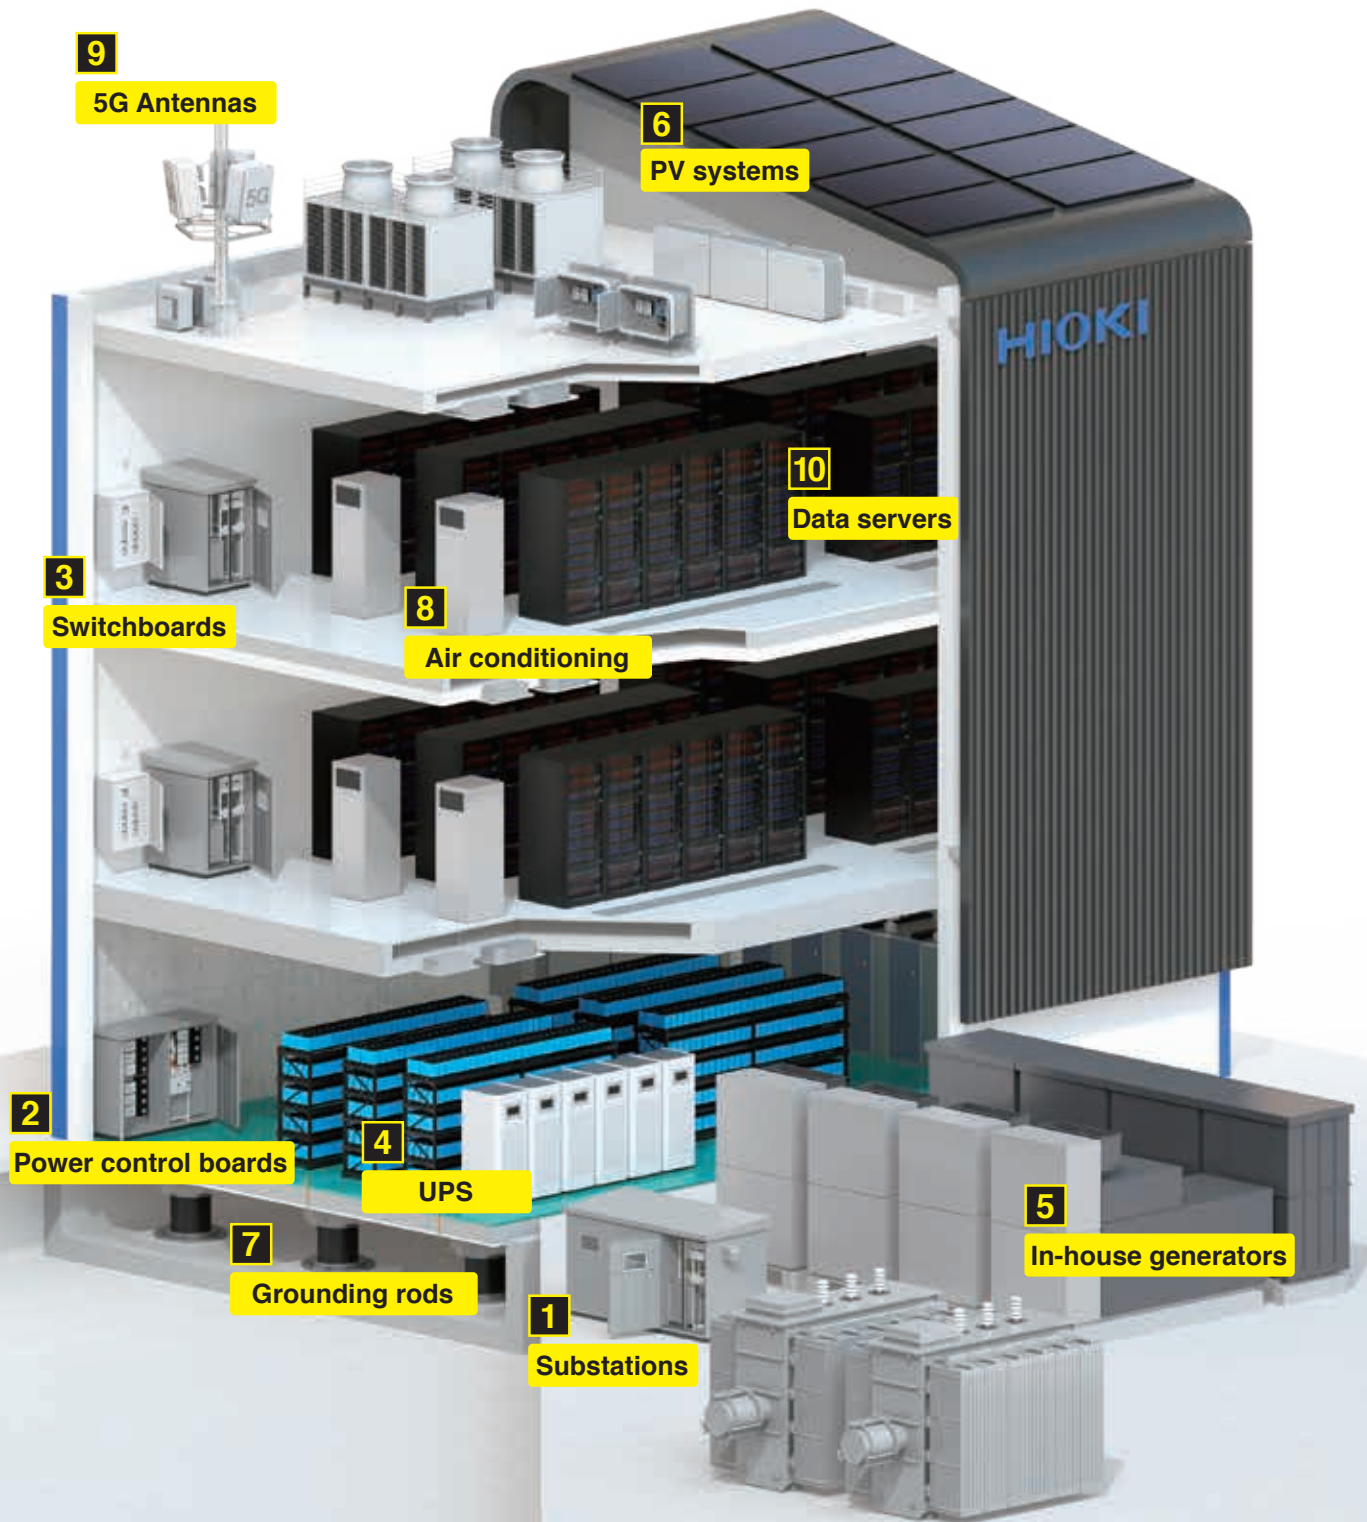

1 2 3

Power receiving and transforming equipment • Power control boards • Switchboards

<p>Verify phase rotation</p> <p>PD3259 (pp. 36-37) PD3129 (pp. 36-37)</p>	<p>Test insulation</p> <p>IR405Xs (pp. 22-27)</p>	<p>Test supply voltage</p> <p>DT42XXs (pp. 28-35)</p>	<p>Verify load current</p> <p>CM437Xs (pp. 12-21) CM414Xs (pp. 12-21)</p>	<p>Detect leakage current</p> <p>CM4001 (pp. 12-21) CM4002 (pp. 12-21) CM4003 (pp. 12-21)</p>	<p>Detect electrical disturbances • Analyze power quality</p> <p>PQ3100 (pp. 40-45) PQ3198 (pp. 40-45)</p>	<p>Record and analyze electrical consumption</p> <p>PW3360 (pp. 42-45) PW3365 (pp. 42-45)</p>	<p>Test 5kV insulation</p> <p>IR3455 (p. 27)</p>
--	--	--	--	--	---	--	---

4

UPS

5

Power generators

<p>Test battery resistance and voltage</p> <p>BT3554 (p. 46-47)</p>	<p>Verify motor insulation</p> <p>IR405Xs (pp. 22-27)</p>	<p>Test supply voltage</p> <p>DT425Xs (pp. 28-35) DT428Xs (pp. 28-35)</p>	<p>Test load current</p> <p>CM437Xs (pp. 12-21) CM414Xs (pp. 12-21)</p>	<p>Verify phase rotation</p> <p>PD3259 (pp. 36-37) PD3129 (pp. 36-37)</p>
--	--	--	--	--

6

PV systems

7

Earth • ground

<p>Test bypass diodes</p> <p>FT4310 (p. 48)</p>	<p>Verify grounding</p> <p>FT6031 (pp. 38-39)</p>	<p>Test PV insulation</p> <p>IR4053 (pp. 22-27)</p>	<p>Verify string current</p> <p>DT4261 + P2000 (pp. 28-35)</p>	<p>Verify string current</p> <p>CM437Xs (pp. 12-21) CM414Xs (pp. 12-21)</p>	<p>Verify grounding</p> <p>FT6031 (pp. 38-39)</p>
--	--	--	---	--	--

8 9

Air conditioning • 5G Antennas


10

Servers

<p>Check temperature and humidity</p> <p>LR5001 (pp. 49-52) LR8514 (pp. 49-52)</p>	<p>Check temperature</p> <p>FT3700 (p. 54) FT3701 (p. 54)</p>	<p>Test insulation</p> <p>IR405Xs (pp. 22-27)</p>	<p>Test supply voltage</p> <p>DT425Xs (pp. 28-35) DT428Xs (pp. 28-35)</p>	<p>Test load current</p> <p>CM437Xs (pp. 12-21) CM414Xs (pp. 12-21)</p>	<p>Verify LAN wiring</p> <p>3665 (p. 53)</p>
---	--	--	--	--	---

Applications

Residences & Commercial Buildings

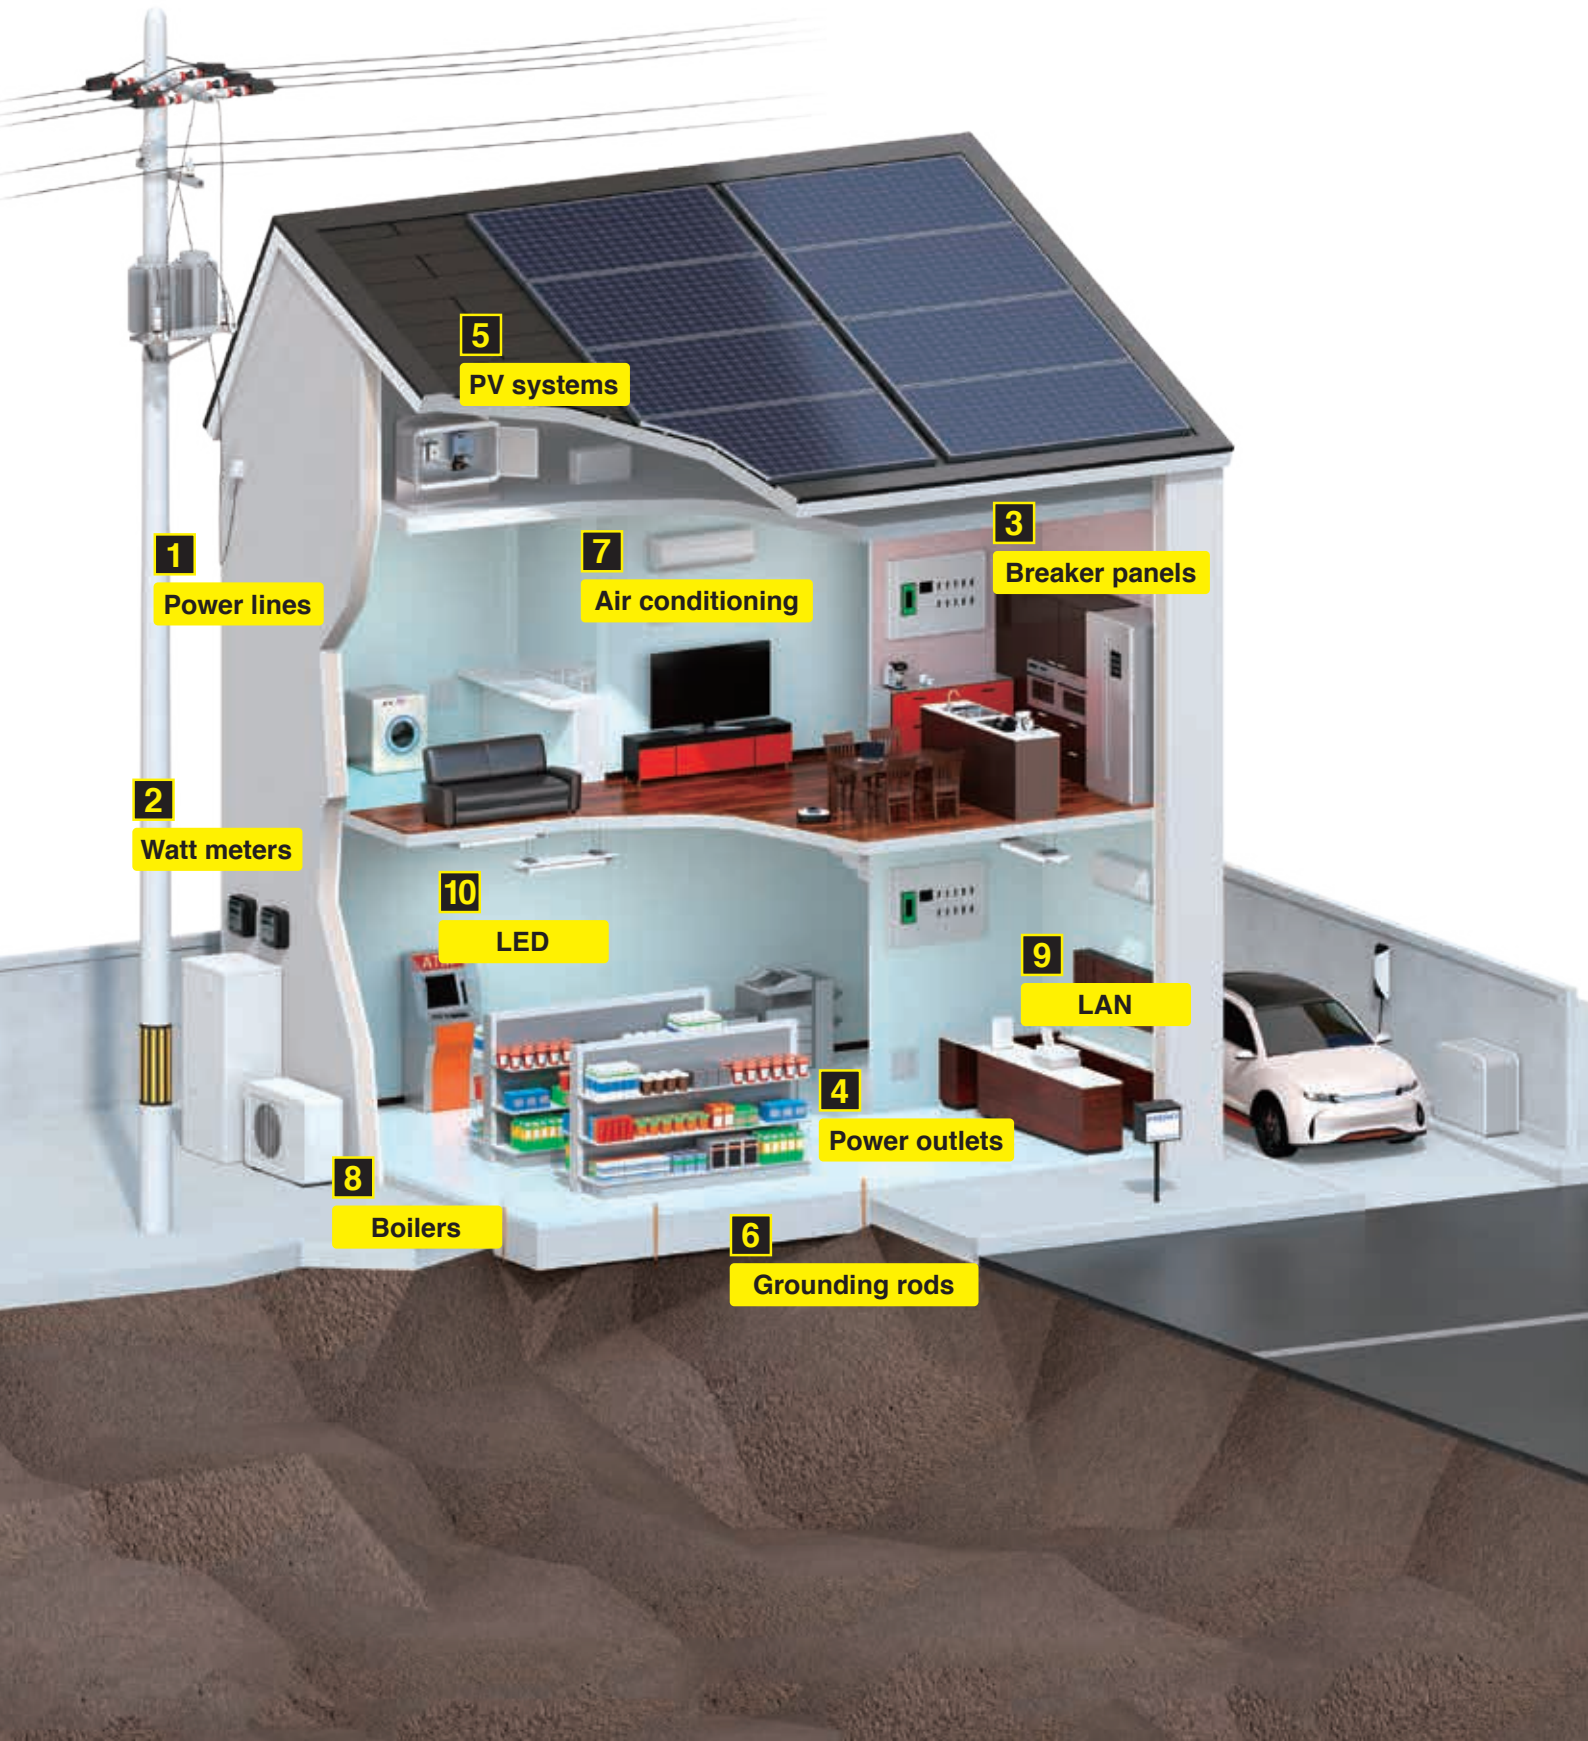

1 2 3

Power lines • Watt meters • Breaker panels

Test insulation	Test supply voltage	Verify load current	Detect leakage current	Record and analyze electrical consumption
IR405Xs (pp. 22-27)	DT42XXs (pp. 28-35)	CM437Xs (pp. 12-21) CM414Xs (pp. 12-21)	CM4001 (pp. 12-21) CM4002 (pp. 12-21) CM4003 (pp. 12-21)	PW3360 (pp. 42-45) PW3365 (pp. 42-45)

4

Power outlets

Verify absence of voltage	Test supply voltage	Verify load current
3481 (p. 37)	3244 (p. 34) 3246 (p. 34)	CM328Xs (pp. 12-21) CM3291 (pp. 12-21)

5

PV systems

Test bypass diodes	Verify grounding	Test PV insulation	Verify string current	Verify string current	Verify grounding
FT4310 (p. 48)	FT6031 (pp. 38-39)	IR4053 (pp. 22-27)	DT4261 + P2000 (pp. 28-35)	CM437Xs (pp. 12-21) CM414Xs (pp. 12-21)	FT6031 (pp. 38-39)

6

Earth • ground

7

Air conditioning

Check temperature and humidity	Check temperature	Test insulation	Test supply voltage	Test load current	Detect leakage current
LR5001 (pp. 49-52) LR8514 (pp. 49-52)	FT3700 (p.54) FT3701 (p.54)	IR4050s (pp. 22-27)	DT42XXs (pp. 28-35)	CM437Xs (pp. 12-21) CM414Xs (pp. 12-21)	CM4001 (pp. 12-21) CM4002 (pp. 12-21) CM4003 (pp. 12-21)

8

Boilers

Test insulation	Test supply voltage	Test load current	Detect leakage current
IR405Xs (pp. 22-27)	DT42XXs (pp. 28-35)	CM437Xs (pp. 12-21) CM414Xs (pp. 12-21)	CM4001 (pp. 12-21) CM4002 (pp. 12-21) CM4003 (pp. 12-21)

9

LAN

Verify LAN wiring
3665 (p. 53)

10

LED

Measure illuminance
FT3424 (p. 54) FT3425 (p. 54)

for mobile devices GENNECT Cross

GENNECT Cross
Dedicated website



Checking and saving measured values



The measurement values displayed on the instrument can be displayed and saved on the tablet in real time.

Record fluctuations in measured values



Measurement values can be saved at set recording intervals. You can also check the maximum, minimum, and average values.

Waveform observation/
FFT analysis




Waveforms such as current and voltage, and FFT analysis waveforms can be displayed.

Record on photos and drawings



Measurements can be recorded on top of captured photos or imported drawing data.

Report writing

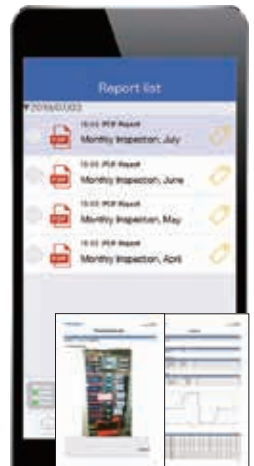

You can create reports from saved data, exporting them as PDF, JPG, or CSV.

Display judgment results in color and bar graph



The measured value is compared with the judgment value, and the result is displayed in PASS/WARNING/FAIL.

Check power quality by analyzing harmonics up to the 30th order



Calculate and display harmonic levels for individual orders, content percentages, and total harmonic distortion (THD-F and THDR).

Record the occurrence of intermittent leakage current



When a value greater than the threshold is measured, the time of occurrence, end time, and the maximum value for that period are recorded.

Display of disequilibrium rates and vector diagrams



Displays the disequilibrium rate and vector diagram.

Audio guidance about the battery measurement sequence



The app provides audio guidance about the battery measurement sequence. And, automatically saves the measurement results.

Supported instruments (Available functions vary depending on the measurement device. For details, please visit the GENNECT Cross special website.)

Wireless adapter Z3210 (optional) must be attached to use GENNECT Cross.

WIRELESS ADAPTER Z3210 (Option) Attach to enable Bluetooth® wireless technology

IR4057-50 FT6031-50 FT6380-50 PD3259-50 BT3554-5x

CM4371-50 CM4373-50 CM4375-50 CM4141-50 CM3286-50 CM4001 CM4002 CM4003

FT3425 FT4310

CM7291


Downloading GENNECT Cross

Data can be downloaded to tablets and smartphones using Hioki's dedicated apps available from the Google Play or App Store. Search for "HIOKI" and download the "GENNECT Cross" app

Manage Data on Mobile Devices and PC

for PCs GENNECT One

GENNECT One
Dedicated website

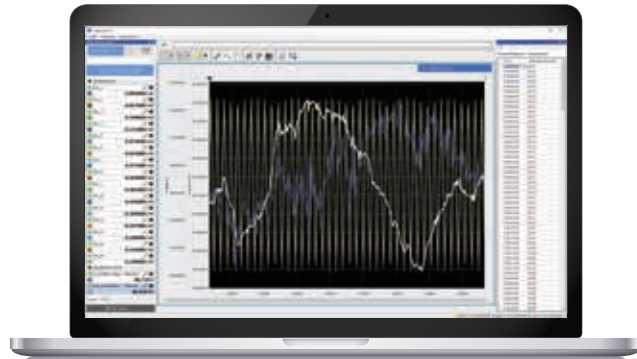

HUB Connect each measuring instrument with LAN cable (BT3554-5x series is USB connection)

LAN Power Analysis	LAN Monitoring Power Quality	LAN Understanding Power Consumption
LAN Voltage and temperature management	LAN Waveform Analysis	USB UPS Inspection



Connect to and manage instruments with a computer

Collect and Display measured values by instrument



Collect values in graphs and lists

Logging: When logging is started, measurement data is acquired at regular intervals from multiple measuring instruments. The acquired data is displayed and stored on the PC in real time.



Combine images and other elements

Dashboard: Create a dashboard by laying out measurements, background images, and other parts on the screen. You can display the measured values on the dashboard in real time.

Change instrument settings from your office



Change instrument settings from a computer

Remote control: Available to change the settings of the instrument and start and stop the measurement from the PC.

Instrument clock synchronization: The clock of the measuring instrument can be synchronized with the PC clock.

Collect and organize measurement files from scattered locations



Transfer measurement files to a computer

Automatic file transfer: Measurement data stored in the instrument can be automatically transferred to the PC.

Data import: The measurement data stored in the instrument can be transferred to the PC manually.



Review acquired files on a single time axis

Time-series viewer: After acquiring the measurement data stored in the main unit of the instrument, the data can be checked in a single time series.

Supported instruments (Available functions vary depending on the measurement device. For details, please visit the GENNECT One special website.)




Downloading GENNECT One

GENNECT One is a free PC application. Please download from the HIOKI website by going to the "GENNECT One" landing page.



CLAMP METERS

Remarkable Ease of Use, New "Slim Jaw" Design



Easily Clamp Within Crowded Cables with New Slim Jaw Design

Innovative slim jaw resolves worksite issues such as crowded wiring to deliver safe, accurate and high-performance testing.



Manage measurement data using Z3210^{*1}

Bluetooth[®]

WIRELESS ADAPTER Z3210 (Option)

Attach to enable Bluetooth[®] wireless technology

Transport to the Excel[®] file

Open an Excel[®] file and select a cell. The measured value being held on the instrument's display will be transferred to the computer and entered into the selected cell.

Learn more Z3210

Transport to GENNECT Cross

GENNECT Cross, a free app designed specifically for use with Hioki measuring instruments, lets you check and manage measurement results and create reports. The software provides a range of functionality that helps manage data in the field, including photographing measurement sites, placing measurement results on photographs, and saving hand written memos.

Learn more GENNECT Cross

Verify current waveforms on your mobile device

Safety PV measurement using P2000^{*2}

Available to mesure 2000 V DC

DC HIGH VOLTAGE PROBE P2000 (Option)








CAT IV 1000 V
CAT III 2000 V




*1: Supported models : CM4371-50, CM4373-50, CM4375-50, CM4141-50, CM4001, CM4002, CM4003, CM3286-50 (Requires attaching WIRELESS ADAPTER Z3210)
*2: Supported models : CM4371-50, CM4373-50, CM4375-50, CM4141-50 (Requires using DC HIGH VOLTAGE PROBE P2000)

- Clamp
- Insulation
- DMMS
- Detectors
- Earth
- Power quality
- Power consumption
- Battery
- PV
- Logger
- LAN
- Signal
- Lux
- Temperature
- Sound







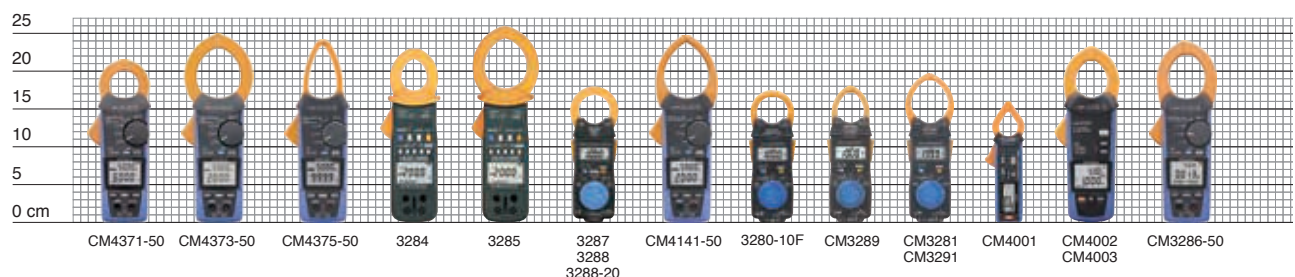

Lineup

Measurement type	AC / DC Current							
Model	CM4371-50	CM4373-50	CM4375-50	3284	3285	3287	3288 3288-20	
Appearance								
Core jaw diameter	φ33 mm (1.30 in)	φ55 mm (2.17 in)	φ34 mm (1.34 in)	φ33 mm (1.30 in)	φ55 mm (2.17 in)	φ35 mm (1.38 in)	φ35 mm (1.38 in)	
AC measurement system	True RMS	True RMS	True RMS	True RMS	True RMS	True RMS	MEAN Value True RMS (-20)	
Frequency characteristics	10 Hz to 1 kHz	10 Hz to 1 kHz	10 Hz to 1 kHz	10 Hz to 2 kHz	10 Hz to 1 kHz	10 Hz to 1 kHz	10 Hz to 500 Hz	
Measurement parameters	AC current (Resolution) Guaranteed accuracy range	600 A (0.01) 1 A to 600 A	2000 A (0.1) 1 A to 2000 A	1000 A (0.1) 1 A to 999.9 A	200 A (0.01) 1 A to 200 A	2000 A (0.1) 10 A to 2000 A	100 A (0.01) Full display range ⁵	1000 A (0.1) Full display range ⁵
	DC current (Resolution)	600 A (0.01)	2000 A (0.1)	999.9 A (0.1)	200 A (0.01)	2000 A (0.1)	100 A (0.01)	1000 A (0.1)
	AC Voltage	1000 V	1000 V	1000 V	600 V	600 V	600 V	600 V
	DC Voltage	2000 V ¹	2000 V ¹	2000 V ¹	600 V	600 V	600 V	600 V
	Power	±1200 kVA (DC) ¹	±4000 kVA (DC) ¹	±2000 kVA (DC) ¹	N / A	N / A	N / A	N / A
	Resistance	6 MΩ	6 MΩ	6 MΩ	N / A	N / A	42 MΩ	42 MΩ
	Temperature	-40°C to 400°C	-40°C to 400°C	-40°C to 400°C	N / A	N / A	N / A	N / A
	Electrostatic capacity	✓	✓	✓	N / A	N / A	N / A	N / A
	Frequency	999.9 Hz	999.9 Hz	999.9 Hz	1000 Hz	1000 Hz	N / A	N / A
	Rush current	✓	✓	✓	N / A	N / A	N / A	N / A
	Continuity check	✓	✓	✓	N / A	N / A	✓	✓
Diode check	✓	✓	✓	N / A	N / A	N / A	N / A	
Voltage detection	✓	✓	N / A	N / A	N / A	N / A	N / A	
Low-pass filter	✓	✓	✓	N / A	N / A	N / A	N / A	
Auto power off	✓	✓	✓	✓	✓	✓	✓	
Auto range	✓	✓	✓	✓	✓	✓	✓	
Data hold	AUTO / MANUAL	AUTO / MANUAL	AUTO / MANUAL	MANUAL	MANUAL	MANUAL	MANUAL	
Automatic AC/DC detection	✓	✓	✓	N / A	N / A	N / A	N / A	
MAX / MIN / AVG	✓	✓	✓	✓	✓	N / A	N / A	
Output	N / A	N / A	N / A	✓	✓	N / A	N / A	
Bluetooth® communication	✓ (with Z3210)	✓ (with Z3210)	✓ (with Z3210)	N / A	N / A	N / A	N / A	
Backlight	✓	✓	✓	N / A	N / A	N / A	N / A	
Display refresh rate	5 times / s	5 times / s	5 times / s	4 times / s ³	4 times / s ³	2.5 times / s	2.5 times / s	
Safety standard category	CAT IV 600 V CAT III 1000 V	CAT IV 600 V CAT III 1000 V	CAT IV 600 V CAT III 1000 V	CAT III 600 V	CAT III 600 V	V: CAT III 300 V A: CAT III 600 V	V: CAT III 300 V A: CAT III 600 V	
Safety standard category (with P2000)	CAT IV 1000 V CAT III 2000 V	CAT IV 1000 V CAT III 2000 V	CAT IV 1000 V CAT III 2000 V	N / A	N / A	N / A	N / A	
CE	✓	✓	✓	N / A	N / A	✓	✓	
Dustproof and waterproof	IP54 ²	IP54 ²	IP54 ²	IP40	IP40	N / A	N / A	
Drop proof	N / A	N / A	N / A	N / A	N / A	N / A	N / A	
Power supply	LR03 ×2 Alkaline	LR03 ×2 Alkaline	LR03 ×2 Alkaline	6F22 ×1 Stacked manganese	6F22 ×1 Stacked manganese	CR2032 ×1 Coin type	CR2032 ×1 Coin type	
Dimensions (W × H × D)	65 × 215 × 35 mm 2.56 × 8.46 × 1.38 in	65 × 250 × 35 mm 2.56 × 9.84 × 1.38 in	65 × 242 × 35 mm 2.56 × 9.53 × 1.38 in	62 × 230 × 39 mm 2.44 × 9.06 × 1.54 in	62 × 260 × 39 mm 2.44 × 10.24 × 1.54 in	57 × 180 × 16 mm 2.24 × 7.09 × 0.63 in	57 × 180 × 16 mm 2.24 × 7.09 × 0.63 in	
Weight	340 g / 12.0 oz	530 g / 18.7 oz	350 g / 12.3 oz	460 g / 16.2 oz	540 g / 19.0 oz	170 g / 6.0 oz	150 g / 5.3 oz	


Size comparison



*1: Only when DC HIGH VOLTAGE PROBE P2000 is used *2: While in storage, or when measuring current in a insulated conductor.
 *3: 4 times / s (FAST), 2 times / s (NORMAL), 1 time / 3s (SLOW) *4: Input Voltage *5: displayed 0 with below 0.06

Measurement type	AC Current					Leakage Current		AC Power	
Model	CM4141-50	3280-10F	CM3289	CM3281	CM3291	CM4001	CM4002 CM4003	CM3286-50	
Appearance									
Core jaw diameter	φ55 mm (2.17 in)	φ33 mm (1.30 in)	φ33 mm (1.30 in)	φ46 mm (1.81 in)	φ46 mm (1.81 in)	φ24 mm (0.94 in)	φ40 mm (1.57 in)	φ46 mm (1.81 in)	
AC measurement system	True RMS	MEAN Value	True RMS	MEAN Value	True RMS	True RMS	True RMS	True RMS	
Frequency characteristics	45 Hz to 1 kHz	50 / 60 Hz	40 Hz to 1 kHz	50 / 60 Hz	40 Hz to 1 kHz	40 Hz to 1 kHz	15 Hz to 2 kHz	45 Hz to 1 kHz	
Measurement parameters	AC current (Resolution) Guaranteed accuracy range	2000 A (0.01) 1 A to 2000 A	1000 A (0.01) 4 A to 1000 A	1000 A (0.01) 4 A to 1000 A	2000 A (0.01) 4 A to 1999 A	2000 A (0.01) 4 A to 1999 A	600 A (0.01mA) 0.6 mA to 600 A	200 A (0.001mA) 0.06 mA to 200 A	600 A (0.001) 0.06 A to 600 A
	DC current (Resolution)	N / A	N / A	N / A	N / A	N / A	N / A	N / A	N / A
	AC Voltage	1000 V	600 V	600 V	600 V	600 V	N / A	N / A	600 V
	DC Voltage	2000 V ¹	600 V	600 V	600 V	600 V	N / A	N / A	N / A
	Power	N / A	N / A	N / A	N / A	N / A	N / A	N / A	360 kW (AC)
	Resistance	6 MΩ	42 MΩ	42 MΩ	42 MΩ	42 MΩ	N / A	N / A	N / A
	Temperature	-40°C to 400°C	N / A	N / A	N / A	N / A	N / A	N / A	N / A
	Electrostatic capacity	✓	N / A	N / A	N / A	N / A	N / A	N / A	N / A
	Frequency	999.9 Hz	N / A	N / A	N / A	N / A	999.9 Hz	2000 Hz	999.9 Hz
	Rush current	✓	N / A	N / A	N / A	N / A	✓	✓	N / A
Continuity check	✓	✓	✓	✓	✓	N / A	N / A	N / A	
Diode check	✓	N / A	N / A	N / A	N / A	N / A	N / A	N / A	
Voltage detection	N / A	N / A	N / A	N / A	N / A	N / A	N / A	N / A	
Low-pass filter	✓	N / A	N / A	N / A	N / A	✓	✓	N / A	
Auto power off	✓	✓	✓	✓	✓	✓	✓	✓	
Auto range	✓	✓	✓	✓	✓	✓	✓	✓	
Data hold	AUTO / MANUAL	MANUAL	MANUAL	MANUAL	MANUAL	AUTO / MANUAL	AUTO / MANUAL	AUTO / MANUAL	
Automatic AC/DC detection	✓ (Voltage only)	N / A	N / A	N / A	N / A	N / A	N / A	N / A	
MAX / MIN / AVG	✓	N / A	N / A	N / A	N / A	✓	✓	✓	
Output	N / A	N / A	N / A	N / A	N / A	N / A	✓ (CM4003 only)	N / A	
Bluetooth® communication	✓ (with Z3210)	N / A	N / A	N / A	N / A	✓ (with Z3210)	✓ (with Z3210)	✓ (with Z3210)	
Backlight	✓	N / A	N / A	N / A	N / A	✓	✓	✓	
Display refresh rate	5 times / s	2.5 times / s	2.5 times / s	2.5 times / s	2.5 times / s	5 times / s	5 times / s	2 times / s	
Safety standard category	CAT IV 600 V CAT III 1000 V	V: CAT III 300 V A: CAT IV 300 V	V: CAT III 300 V A: CAT IV 300 V	V: CAT III 300 V A: CAT IV 300 V	V: CAT III 300 V A: CAT IV 300 V	CAT III 300 V	CAT IV 300 V (CM4002) CAT III 600 V (CM4002) CAT III 300 V (CM4003)	CAT IV 600 V CAT III 1000 V	
Safety standard category (with P2000)	CAT IV 1000 V CAT III 2000 V	N / A	N / A	N / A	N / A	N / A	N / A	N / A	
CE	✓	✓	✓	✓	✓	✓	✓	✓	
Dustproof and waterproof	IP50 ²	IP40	IP40	IP40	IP40	N / A	IP40	IP50 ²	
Drop proof	N / A	✓	✓	✓	✓	N / A	N / A	N / A	
Power supply	LR03 ×2 Alkaline	CR2032 ×1 Coin type	CR2032 ×1 Coin type	CR2032 ×1 Coin type	CR2032 ×1 Coin type	LR03 ×1 Alkaline	LR6 ×2 Alkaline	LR03 ×2 Alkaline	
Dimensions (W × H × D)	65 × 247 × 35 mm 2.56 × 9.72 × 1.38 in	57 × 175 × 16 mm 2.24 × 6.89 × 0.63 in	57 × 181 × 16 mm 2.24 × 7.13 × 0.63 in	57 × 198 × 16 mm 2.24 × 7.80 × 0.63 in	57 × 198 × 16 mm 2.24 × 7.80 × 0.63 in	37 × 160 × 27 mm 1.46 × 6.30 × 1.06 in	64 × 233 × 36 mm 2.52 × 9.17 × 1.41 in	65 × 241 × 35 mm 2.56 × 9.49 × 1.38 in	
Weight	300 g / 10.6 oz	100 g / 3.5 oz	100 g / 3.5 oz	103 g / 3.6 oz	103 g / 3.6 oz	115 g / 4.1 oz	400 g / 14.1 oz	450 g / 15.9 oz	

Test leads with an integrated cap for greater convenience and safety

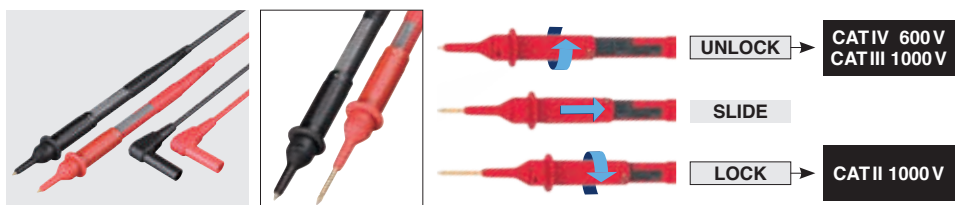


The L9300 test lead with an integrated cap is included as a standard. The finger guard can be easily slid to switch between measurement categories without worrying about losing the cap.

AC/DC Current

AC/DC CLAMP METER CM4371-50, CM4373-50, CM4375-50



Product warranty for 3 years
Accuracy guaranteed for 1 year



Accessories



L9300 C0203

- LR03 Alkaline battery x2
- Instruction manual



CM4371-50 *New*
600 A AC/DC
True RMS
CAT IV 600 V
CAT III 1000 V
With P2000
CAT IV 1000 V
CAT III 2000 V
With Z3210
Bluetooth
Please see www.hioki.com for list of supported regions.
GENNECT Cross



CM4373-50 *New*
2000 A AC/DC
True RMS
CAT IV 600 V
CAT III 1000 V
With P2000
CAT IV 1000 V
CAT III 2000 V
With Z3210
Bluetooth
Please see www.hioki.com for list of supported regions.
GENNECT Cross



CM4375-50 *New*
1000 A AC/DC
True RMS
CAT IV 600 V
CAT III 1000 V
With P2000
CAT IV 1000 V
CAT III 2000 V
With Z3210
Bluetooth
Please see www.hioki.com for list of supported regions.
GENNECT Cross



WIRELESS ADAPTER Z3210 (Option)
Attach to enable Bluetooth® wireless technology



DC HIGH VOLTAGE PROBE P2000 (Option)
Available to measure 2000 V DC

CLAMP ON AC/DC HiTESTER 3284, 3285

To be discontinued

Not CE marked

Product warranty for 3 years
Accuracy guaranteed for 1 year



Accessories



L9207-10 9399/9345*

- Hand strap
- Stacked manganese battery 6F22
- Instruction manual

Model 3284 includes the 9399, and Model 3285 includes the 9346 carrying case.



φ33 mm = 1.30 in
3284
200 A AC/DC
True RMS
CAT III 600 V



φ55 mm = 2.17 in
3285
2000 A AC/DC
True RMS
CAT III 600 V

CLAMP ON AC/DC HiTESTER 3287, 3288, 3288-20



Product warranty for 3 years
Accuracy guaranteed for 1 year



Accessories



L9208 9398

- Coin type lithium battery CR2032x1
- Instruction manual



φ35 mm = 1.38 in
3287
100 A AC/DC
True RMS
V: CAT III 300 V
A: CAT III 600 V



φ35 mm = 1.38 in
3288
1000 A AC/DC
True RMS
V: CAT III 300 V
A: CAT III 600 V



φ35 mm = 1.38 in
3288-20
1000 A AC/DC
True RMS
V: CAT III 300 V
A: CAT III 600 V



Model	CM4371-50	CM4373-50	CM4375-50		Basic accuracy
AC Current	✓	N/A	N/A	20.00 A/600.0 A (guaranteed accuracy range: 1.00 A to 600.0 A)	±1.3% rdg ±0.08 A
	N/A	✓	N/A	600.0 A/2000 A (guaranteed accuracy range: 1.0 A to 2000 A)	±1.3% rdg ±0.3 A
	N/A	N/A	✓	1000 A (guaranteed accuracy range: 1.0 A to 999.9 A)	±1.3% rdg ±0.3 A
DC Current	✓	N/A	N/A	20.00 A/600.0 A (guaranteed accuracy range: ±1.00A to ±600.0 A)	±1.3% rdg ±0.08 A
	N/A	✓	N/A	600.0 A/2000 A (guaranteed accuracy range: ±1.0A to ±2000 A)	±1.3% rdg ±0.3 A
	N/A	N/A	✓	1000 A (guaranteed accuracy range: ±1.0 A to ±999.9 A)	±1.3% rdg ±0.3 A
AC + DC Current	✓	N/A	N/A	20.00 A/600.0 A	±1.3% rdg ±0.13 A
	N/A	✓	N/A	600.0 A/2000 A	±1.3% rdg ±1.3 A
	N/A	N/A	✓	30.0 A/900.0 A/999.9 A	±1.3% rdg ±1.3 A
AC Voltage	✓	✓	✓	6.000 V/60.00 V/600.0 V/1000 V	±0.9% rdg ±0.003 V
DC Voltage	✓	✓	✓	600.0 mV/6.000 V/60.00 V/600.0 V/1000 V/2000 V ²	±0.5% rdg ±0.5 mV
AC + DC Voltage	✓	✓	✓	6.000 V/60.00 V/600.0 V/1000 V	±1.0% rdg ±0.013 V
DC Power	✓	N/A	N/A	0.0 VA to 1200 kVA ²	±2.0% rdg ±20 dgt
	N/A	✓	N/A	0.000 kVA to 4000 kVA ²	±2.0% rdg ±20 dgt
	N/A	N/A	✓	0.000 kVA to ±2000 kVA ²	±2.0% rdg ±0.020 kVA
Resistance	✓	✓	✓	600.0 Ω/6.000 kΩ/60.00 kΩ/600.0 kΩ/6.000 MΩ	±0.7% rdg ±0.5 Ω
Temperature	✓	✓	✓	-40.0°C to 400.0°C	±0.5% rdg ±3.0°C
Electrostatic capacity	✓	✓	✓	1.000 μF/10.00 μF/100.0 μF/1000 μF	±1.9% rdg ±0.005 μF
Frequency	✓	✓	✓	9.999 Hz/99.99 Hz/999.9 Hz	±0.1% rdg ±0.003 Hz

Display refresh rate	5 times/s ³
Operating temperature	-25°C to 65°C, 90% RH or less (non-condensating)
Storage temperature	-30°C to 70°C, 90% RH or less (non-condensating)
Dustproof and waterproof	IP54 ⁴
Power supply	Alkaline battery LR03 x2
Continuous operating time	40 hours ⁵
Dimensions (W x H x D)	CM4371-50: 65 x 215 x 35 mm (2.56 x 8.46 x 1.38 in) CM4373-50: 65 x 250 x 35 mm (2.56 x 9.84 x 1.38 in) CM4375-50: 65 x 242 x 35 mm (2.56 x 9.53 x 1.38 in)
Weight	CM4371-50: 340 g (12 oz) CM4373-50: 530 g (18.7 oz) CM4375-50: 350 g (12.3 oz)

Order code	CM4371-50	Order code	CM4371-90	Order code	CM4373-91
Order code	CM4373-50	Order code	CM4373-90	Order code	CM4373-92
Order code	CM4375-50	Order code	CM4375-90	Order code	CM4375-92

Model CM437x-90 includes Z3210 as a set
Model CM437x-91 includes P2000 as a set
Model CM437x-92 includes P2000, Z3210 as a set

*1: Excludes CM4375-10 *2: Only when DC HIGH VOLTAGE PROBE P2000 is used *3: Excludes electrostatic capacity, frequency, and temperature
*4: While in storage, or when measuring current in a insulated conductor. Do not use when wet. *5: With backlight and Bluetooth[®] communications turned OFF



Model	3284	3285		Basic accuracy
AC Current	✓	N/A	20.00 A/200.0 A (guaranteed accuracy range: 1.00 A to 200.0 A)	±1.3% rdg ±3 dgt
	N/A	✓	200.0 A/2000 A (guaranteed accuracy range: 10.0 A to 2000 A)	±1.3% rdg ±3 dgt
DC Current	✓	N/A	20.00 A/200.0 A (guaranteed accuracy range: 1.00 A to 200.0 A)	±1.3% rdg ±3 dgt
	N/A	✓	200.0 A/2000 A (guaranteed accuracy range: 10.0 A to 2000 A)	±1.3% rdg ±3 dgt
AC + DC Current	✓	N/A	20.00 A/200.0 A	±1.3% rdg ±13 dgt
	N/A	✓	200.0 A/2000 A	±1.3% rdg ±13 dgt
AC Voltage	✓	✓	30.00 V/300.0 V/600 V	±1.0% rdg ±3 dgt
DC Voltage	✓	✓	30.00 V/300.0 V/600 V	±1.0% rdg ±3 dgt
AC + DC Voltage	✓	✓	30.00 V/300.0 V/600 V	±1.0% rdg ±7 dgt
Frequency	✓	✓	10.00 Hz/100.0 Hz/1000 Hz	±0.3% rdg ±1 dgt

Display refresh rate	4 times/s (FAST), 2 times/s (NORMAL), 1 time/3s (SLOW)
Operating temperature	0°C to 40°C, 80% RH or less (non-condensating)
Storage temperature	-10°C to 50°C (non-condensating)
Dustproof and waterproof	IP40
Power supply	Stacked manganese battery 6F22 x1, 25 hours or AC adapter 9445-02/-03 (Options)
Continuous operating time	
Dimensions (W x H x D)	3284: 62 x 230 x 39 mm (2.44 x 9.06 x 1.54 in) 3285: 62 x 260 x 39 mm (2.44 x 10.24 x 1.54 in)
Weight	3284: 460 g (16.2 oz) 3285: 540 g (19 oz)

Includes external output function
Current and instantaneous waveforms can be recorded by connecting to the recorder.



Recording output (REC mode)
1V DC / f.s.
Monitor output (MON mode)
1V AC / f.s.

*Requires optional L9094, L9095 or L9096 Output Cord

Order code	3284
Order code	3285



Model	3287	3288	3288-20		Basic accuracy
AC Current	✓	N/A	N/A	10.00 A/100.0 A (Display range: 0A to 10.00 A/100.0 A)	±1.5% rdg ±5 dgt
	N/A	✓	✓	100.0 A/1000 A (Display range: 0A to 100.0 A/1000 A)	±1.5% rdg ±5 dgt
DC Current	✓	N/A	N/A	10.00 A/100.0 A	±1.5% rdg ±5 dgt
	N/A	✓	✓	100.0 A/1000 A	±1.5% rdg ±5 dgt
AC Voltage	✓	✓	✓	4.200 V/42.00 V/420.0 V/600 V	±2.3% rdg ±8 dgt
DC Voltage	✓	✓	✓	420.0 mV/4.200 V/42.00 V/420.0 V/600 V	±1.3% rdg ±4 dgt
Resistance	✓	✓	✓	420.0 Ω/4.200 kΩ/42.00 kΩ/420.0 kΩ/4.200 MΩ/42.00 MΩ	±2.0% rdg ±4 dgt

Display refresh rate	2.5 times/s
Operating temperature	0°C to 40°C, 80% RH or less (non-condensating)
Storage temperature	-10°C to 50°C, 80% RH or less (non-condensating)
Dustproof and waterproof	N/A
Power supply	Coin type lithium battery CR2032 x1
Continuous operating time	25 hours
Dimensions (W x H x D)	57 x 180 x 16 mm (2.24 x 7.09 x 0.63 in)
Weight	3287: 170 g (6.0 oz), 3288, 3288-20: 150 g (5.3 oz)


Order code	3287
Order code	3288
Order code	3288-20

AC Current


AC CLAMP METER CM4141-50




Product warranty for 3 years
Accuracy guaranteed for 1 year



WIRELESS ADAPTER Z3210 (Option)
Attach to enable Bluetooth® wireless technology



DC HIGH VOLTAGE PROBE P2000 (Option)
Available to measure 2000 V DC

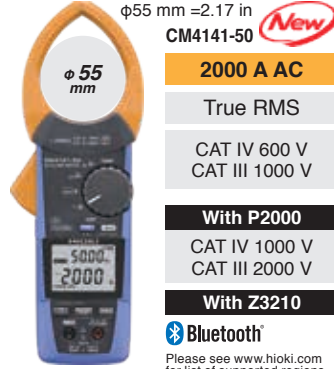

φ55 mm = 2.17 in
CM4141-50 **New**

2000 A AC

True RMS

CAT IV 600 V
CAT III 1000 V

With P2000

CAT IV 1000 V
CAT III 2000 V

With Z3210



Please see www.hioki.com for list of supported regions.



Accessories




L9300 C0203

- LR03 Alkaline battery x2
- Instruction manual

AC CLAMP METER 3280-10F, CM3289, CM3281, CM3291



Product warranty for 3 years
Accuracy guaranteed for 1 year



φ33 mm = 1.30 in

3280-10F
3280-70F

1000 A AC

MEAN Value

V: CAT III 300 V
A: CAT IV 300 V



9398 (-10F) C0205 (-70F)



φ33 mm = 1.30 in

CM3289

1000 A AC

True RMS

V: CAT III 300 V
A: CAT IV 300 V



9398



φ46 mm = 1.81 in

CM3281
CM3291

2000 A AC

CM3281: MEAN Value
CM3291: True RMS

V: CAT III 300 V
A: CAT IV 300 V



CARRYING CASE

Accessories



L9208

- CARRYING CASE (models vary as shown on right)
- Coin type lithium battery CR2032x1
- Instruction manual

Leakage Current

AC LEAKAGE CLAMP METER CM4001, CM4002, CM4003



Product warranty for 3 years
Accuracy guaranteed for 1 year



φ24 mm = 0.94 in

CM4001

0.6 mA to 600 A AC

True RMS

CAT III 300 V

Accessories



CARRYING CASE

- STRAP
- LR03 Alkaline battery x1
- Instruction manual

With Z3210



Please see www.hioki.com for list of supported regions.



φ40 mm = 1.57 in

CM4002

0.06 mA to 200 A AC

True RMS

CAT IV 300 V
CAT III 600 V

Accessories



C0203

- LR6 Alkaline battery x2
- Instruction manual

With Z3210



Please see www.hioki.com for list of supported regions.



φ40 mm = 1.57 in

CM4003

0.06 mA to 200 A AC

True RMS

CAT III 300 V

Accessories



C0203 L9097

- LR6 Alkaline battery x2
- Instruction manual
- USB cable

With Z3210



Please see www.hioki.com for list of supported regions.



Functions

- External output
- External power supply



Model	CM4141-50	Basic accuracy
AC Current	✓	60.00 A/600.0 A/2000 A (guaranteed accuracy range: 1.00A to 2000 A)
AC Voltage	✓	6.000 V/60.00 V/600.0 V/1000 V
DC Voltage	✓	600.0 mV/6.000 V/60.00 V/600.0 V/1000 V/2000 V ¹
AC + DC Voltage	✓	6.000 V/60.00 V/600.0 V/1000 V
Resistance	✓	600.0 Ω/6.000 kΩ/60.00 kΩ/600.0 kΩ/6.000 MΩ
Temperature	✓	-40.0°C to 400.0°C
Electrostatic capacity	✓	1.000 μF/10.00 μF/100.0 μF/1000 μF
Frequency	✓	9.999 Hz/99.99 Hz/999.9 Hz

Display refresh rate	5 times/s ²
Operating temperature	-25°C to 65°C, 90% RH or less (non-condensating)
Storage temperature	-30°C to 70°C, 90% RH or less (non-condensating)
Dustproof and waterproof	IP50 ³
Power supply	Alkaline battery LR03 x2
Continuous operating time	48 hours ⁴
Dimensions (W x H x D)	65 x 247 x 35 mm (2.56 x 9.72 x 1.38 in)
Weight	300 g (10.6 oz)

Order code **CM4141-50**

Order code **CM4141-90**

Model CM4141-90 includes Z3210 as a set

*1: Only when DC HIGH VOLTAGE PROBE P2000 is used *2: Excludes electrostatic capacity, frequency, and temperature
 *3: While in storage, when measuring resistance in a completely dry or when measuring current in a insulated conductor. *4 With backlight and Bluetooth® communications turned OFF



Model	3280-10F	CM3289	CM3281 · CM3291	Basic accuracy
AC Current	✓	✓	N / A	42.00 A/420.0 A/1000 A (guaranteed accuracy range: 4.00A to 1000 A)
AC Voltage	N / A	N / A	✓	42.00 A/420.0 A/2000 A (guaranteed accuracy range: 4.00A to 1999 A)
DC Voltage	✓	✓	✓	4.200 V/42.00 V/420.0 V/600 V
Resistance	✓	✓	✓	420.0 mV/4.200 V/42.00 V/420.0 V/600 V
				420.0 Ω/4.200 kΩ/42.00 kΩ/420.0 kΩ/4.200 MΩ/42.00 MΩ

Display refresh rate	2.5 times/s
Operating temperature	-25°C to 65°C, 80% RH or less (non-condensating)
Storage temperature	-25°C to 65°C, 80% RH or less (non-condensating)
Dustproof and waterproof	IP40 (EN60529) ²
Power supply	Coin type lithium battery CR2032 x1
Continuous operating time	3280-10F, CM3281: 120 hours CM3289: 70 hours CM3291: 70 hours
Dimensions (W x H x D)	3280-10F: 57 x 175 x 16 mm (2.24 x 6.89 x 0.63 in) CM3289: 57 x 181 x 16 mm (2.24 x 7.13 x 0.63 in) CM3281, CM3291: 57 x 198 x 16 mm (2.24 x 7.80 x 0.63 in)
Weight	3280-10F: 100 g (3.5 oz) CM3289: 100 g (3.5 oz) CM3281, CM3291: 103 g (3.6 oz)



3280F, CM3289, CM3291 are compatible with the CT6280 AC Flexible Current Sensor
 Φ130mm (5.1 in), 4200 A AC

Order code **3280-10F**

Order code **3280-70F**

Order code **CM3289**

Order code **CM3291**

Model 3280-70F includes 3280-10F AC Clamp Meter and CT6280 AC Flexible Sensor as a set

*1: Excludes 3280F *2: Excludes CM3289, CM3281, CM3291




Model	CM4001	CM4002-CM4003	Basic accuracy
AC Current	✓	N / A	60.00 mA/600.0 mA/6.000 A (guaranteed accuracy range: 0.60 mA to 6.000 A)
	✓	N / A	60.00 A/600.0 A (guaranteed accuracy range: 6.000 A to 600.0 A)
	N / A	✓	6.000 mA/60.00 mA/600.0 mA/6.000 A/60.00 A/200.0 A (guaranteed accuracy range: 0.060 mA to 200.0 A)
Frequency	✓	N / A	999.9 Hz
	N / A	✓	999.9 Hz/2000 Hz

Display refresh rate	5 times/s
Operating temperature	-10°C to 65°C (non-condensating)
Storage temperature	CM4001: -10°C to 65°C (non-condensating) CM4002, CM4003: -30°C to 70°C (non-condensating)
Dustproof and waterproof	CM4002, CM4003: IP40
Power supply	CM4001: LR03 Alkaline battery x 1, 32 hours CM4002, CM4003: LR6 Alkaline battery x 2, 48 hours (LR6, without Z3210)
Continuous operating time	CM4003: AC ADAPTER Z1013 (Option)
Dimensions (W x H x D)	CM4001: 37 x 160 x 27 mm (1.46 x 6.30 x 1.06 in) CM4002, CM4003: 64 x 233 x 36 mm (2.52 x 9.17 x 1.41 in)
Weight	CM4001: 115 g (4.1 oz) CM4002, CM4003: 400 g (14.1 oz)

Includes external output function (CM4003 Only)

Current and instantaneous waveforms can be recorded by connecting to the recorder.



RMS value output (RMS mode)
 DC 600 mV/f.s.
Waveform output (WAVE mode)
 AC 600 mV/f.s.

*Using CONNECTION CABLE L9097 (Accessories)

Order code **CM4001**

Order code **CM4001-90**

Order code **CM4002**

Order code **CM4002-90**

Order code **CM4003**

Order code **CM4003-90**

Order code **Z3210**

Model CM4001-90, CM4002-90, CM4003-90 includes Z3210 as a set



AC CLAMP POWER METER CM3286-50

 $\phi 46 \text{ mm} = 1.81 \text{ in}$

CM3286-50
AC 600 A

True RMS

 CAT IV 600 V
 CAT III 1000 V

With Z3210

 Please see www.hioki.com
 for list of supported regions.

 WIRELESS ADAPTER
 Z3210 (Option)

**Attach to enable Bluetooth®
 wireless technology**

 Order code **CM3286-50**

 Order code **CM3286-90**

 Model CM3286-90
 includes Z3210 as a set

Accessories


L9257
C0203

- LR03 Alkaline battery x2
- Instruction manual

*1: Harmonics can be displayed using dedicated application software (GENNECT Cross)
 *2: While in storage, or when measuring an insulated conductor. Do not use when wet.

Measurement parameters	Power (Active/reactive/apparent)	Single phase 3.600 kW/36.00 kW/360.0 kW Guaranteed accuracy range: 0.005 kW to 360.0 kW Basic accuracy: $\pm 2.0\%$ rdg ± 7 dgt Balanced three-phase 3-wire 7.200 kW/72.00 kW/720.0 kW guaranteed accuracy range: 0.020 kW to 623.5 kW Basic accuracy: $\pm 3.0\%$ rdg ± 10 dgt Balanced three-phase 4-wire 10.80 kW/108.0 kW/1080 kW guaranteed accuracy range: 0.040 kW to 1080 kW Basic accuracy: $\pm 2.0\%$ rdg ± 3 dgt
	AC Current	6.000 A/60.00 A/600.0 A Basic accuracy: $\pm 1.0\%$ rdg ± 3 dgt
	AC Voltage	600.0 V Basic accuracy: $\pm 0.7\%$ rdg ± 3 dgt
Power factor	Single-phase, Balanced three-phase 4-wire: [Regeneration] -1.000 to -0.001, [Consumption] 0.000 to 1.000 Balanced three-phase 3-wire: [Regeneration] -0.001, [Consumption] 0.000 to 1.000	
Phase angle	Single-phase, Balanced three-phase 4-wire : [lead] -180.0° to -0.1°, [lag] 0.0° to 179.9° Balanced three-phase 3-wire: [lead] -90.0° to -0.1°, [lag] 0.0° to 90.0°	
Frequency	45.0 Hz to 999.9 Hz	
Simple Active Energy Consumption (Single-phase)	99.99 Wh/999.9 Wh/9.999 kWh/ 99.99 kWh/999.9 kWh/9999 kWh/	
Harmonic ^{*1} (With Z3210)	Voltage or current harmonic levels up to 30th order, content factor, total harmonic distortion ratio	
Display refresh rate	2 times/s	
Operating temperature	-25°C to 65°C, 80% RH or less (non-condensating)	
Storage temperature	-25°C to 65°C, 80% RH or less (non-condensating)	
Dustproof and waterproof	IP50 ^{*2}	
Other	Power supply LR03 Alkaline battery x2 Continuous operating time 25 hours	
Dimensions (W x H x D)	65 x 241 x 35 mm (2.56 x 9.49 x 1.38 inch)	
Weight	450 g (15.9 oz)	

Clamp

Insulation

DIMMS

Detectors

Earth

Power quality

Power consumption

Battery

PV

Logger

LAN

Signal

Lux

Temperature

Sound

Options

3280-10F, CM3289, CM3291, 3287*, 3288*, 3288-20*

CM4371-50, CM4373-50, CM4375-50, CM4141-50, CM3286-50

3284, 3285

CM4002, CM4003

1 L9208 Cable length 70 cm (2.3 ft) With the Cap (Red x1, Black x1)

2 CT6280* Φ 130 mm (5.12 in) 4200 A AC
*Not available to use with 3287, 3288, 3288-20

3 L4933¹ 48 mm (1.89 in)

4 L4934¹ 48 mm (1.89 in) *1: Remove the cap of L9208 before attaching it

7 L4933² 48 mm (1.89 in) *2: Remove the cap of L9207-10 before attaching it. Slide the guard of the L9300 and attach it in the measurement CAT II.

8 L4934² 48 mm (1.89 in)

9 L9243 97 mm (3.82 in)

10 L4932 With the Cap (Red x1, Black x1)

11 L4935

12 L4936

13 L4937 30 mm (1.18 in) Magnet : ϕ 6 mm (0.24 in)

14 9804 Magnet : ϕ 11 mm (0.43 in)

15 L4938 With the Cap (Red x1, Black x1) 22 mm (0.87 in), ϕ 3.7 mm (0.15 in)

16 L4939 1 22 mm (0.87 in), ϕ 3.7 mm (0.15 in) 2 48 mm (1.89 in), ϕ 2.6 mm (0.1 in)

17 9290-10

1 L9300 Cable length 95 cm (3.12 ft)

2 L9207-10 Cable length 90 cm (2.95 ft) With the Cap (Red x1, Black x1)

3 L4930 Cable length 120 cm (3.94 ft)

4 L4931 Cable length 150 cm (4.92 ft) with the coupling connector

L4930, L4931 can be used to extend the cable


5 P2000 Cable length 150 cm (4.92 ft) (Probe side)

6 DT4910 -40 to 260°C Sensor length: 80 cm (2.62 ft)


3280-10F, CM3289, CM3281, CM3291, 3287, 3288, 3288-20	
1	TEST LEAD L9208
2	AC FLEXIBLE CURRENT SENSOR CT6280 For 3280-10F, CM3289, CM3281, CM3291
3	CONTACT PIN SET L4933
4	SMALL ALLIGATOR CLIP SET L4934
5	CARRYING CASE 9398 For 3280-10F, CM3289, 3287, 3288, 3288-20
6	CARRYING CASE C0205 Bundled accessory for CT6280
7	TEST LEADS HOLDER 9209 For 3280-10F, CM3289, 3287, 3288, 3288-20




CM4371-50, CM4373-50, CM4375-50, CM4141-50, CM3286-50	
1	TEST LEAD L9300
2	TEST LEAD L9207-10
3	CONNECTION CABLE SET L4930
4	EXTENSION CABLE SET L4931
5	DC HIGH VOLTAGE PROBE P2000
6	THERMOCOUPLES(K) DT4910 For CM437x-50 series, CM4141-50
7	CONTACT PIN SET L4933
8	SMALL ALLIGATOR CLIP SET L4934
9	GRABBER CLIP L9243
10	TEST PIN SET L4932
11	ALLIGATOR CLIP SET L4935
12	BUS BAR CLIP SET L4936
13	MAGNETIC ADAPTER SET L4937
14	MAGNETIC ADAPTER SET 9804
15	TEST PIN SET L4938
16	BREAKER PIN SET L4939
17	CLAMP ON ADAPTER 9290-10 For CM3286-50
18	CONNECTION CORD L9257 Combination of L4930 and L4935
19	CARRYING CASE C0203

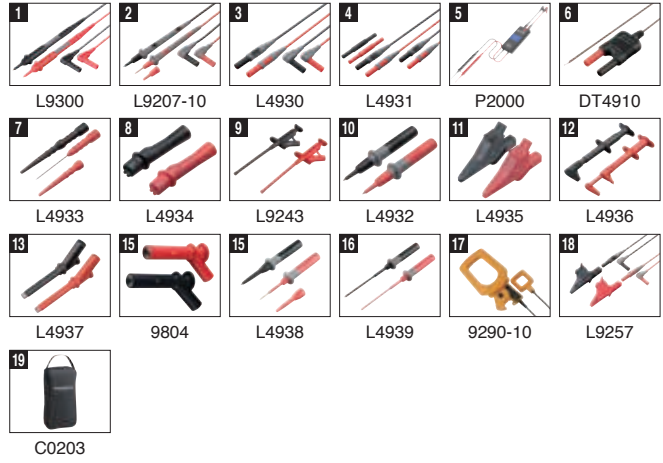

3284, 3285	
1	TEST LEAD L9207-10 3284, 3285 only, 90cm
2	OUTPUT CORD L9094 1.5m, Banana terminal
3	OUTPUT CORD L9095 1.5m, BNC terminal
4	OUTPUT CORD L9096 1.5m, Block terminal
5	AC ADAPTER 9445-02
6	CARRYING CASE 9399 3284 only
7	CARRYING CASE 9345 3285 only



CM4002, CM4003	
1	CONNECTION CABLE L9097
2	CONVERSION ADAPTER 9704
3	AC ADAPTER Z1013
4	CARRYING CASE C0203



Clamp

Insulation

DC/MS

Detectors

Earth

Power quality

Power consumption

Battery

PV

Logger

LAN

Signal

Lux


Temperature

Sound



INSULATION TESTERS

DROP PROOF



Built tough to withstand a 1-meter drop onto a concrete floor



5 ranges

Rated output voltage (DC)
Effective maximum indicated value

50 V / 100 MΩ

125 V / 250 MΩ

250 V / 500 MΩ

500 V / 2000 MΩ

1000 V / 4000 MΩ

Manage measurement data using Bluetooth® communication (IR4057-50 with Z3210 Only)



WIRELESS ADAPTER Z3210 (Option)
Attach to enable Bluetooth® wireless technology



Learn More

Transport to the Excel® file




Open an Excel® file and select a cell. The measured value being held on the instrument's display will be transferred to the computer and entered into the selected cell.


Transport to GENNECT Cross



GENNECT Cross, a free app designed specifically for use with Hioki measuring instruments, lets you check and manage measurement results and create reports. The software provides a range of functionality that helps manage data in the field, including photographing measurement sites, placing measurement results on photographs, and saving handwritten memos.

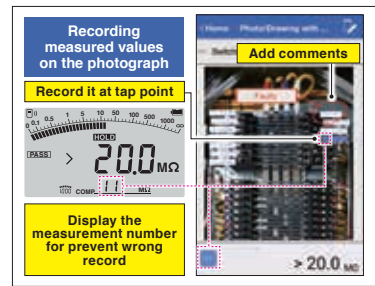

Significantly improve testing speed using test lead with remote switch

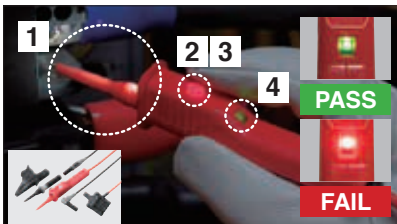

- 1 LED light shines a spotlight on the target
- 2 Red light warns of live voltage detection
- 3 Measurement start switch
- 4 Identify pass/fail decisions with red or green light

TEST LEAD SET WITH REMOTE SWITCH L9788-11 (Option)
*Standard with the IR4056-21, Not CE Marked

Identify PASS / FAIL using light and sound



Compare measured values to pre-set reference values to generate a pass or fail decision with the Comparator function.

Convenient for inspections

Low resistance measurement^{*1}

Perform EV and HEV continuity checks as well as resistance measurement of protective conductors in facility electrical equipment as defined by IEC 60364.

AC/DC voltage measurement

Automatically detect AC or DC for testing. Use as a tester thanks to DC voltage measurement functionality.

PV Ω dedicated function^{*2}

Measurement is not affected even when the PV system is online.

^{*1} Excludes IR4053 ^{*2} IR4053 Only

One-touch Start and Stop

Single test



Measurement voltage is applied while MEASURE key is pressed

Continuous test



Lift and lock the MEASURE key to apply a continuous stream of voltage

Prevent Accidental High Voltage Generation

Flashing light







Under [500V], [1000V], or [PVΩ] settings, the RELEASE button will blink. Press to unlock the release of high voltages as an extra safety measure.

Release lock







Lineup - Digital

Measurement type	Standard	High-speed	PV	High-voltage
Model	IR4056-20 IR4056-21	IR4057-50	IR4053-10	IR3455
Appearance				
Number of ranges	5	5	5	5
Testing voltage (DC) / Effective maximum indicated value		50 V /100 MΩ 125 V /250 MΩ 250 V /500 MΩ 500 V /2000 MΩ 1000 V /4000 MΩ		250 V /500 GΩ 500 V /1.00 TΩ 1000 V /2.00 TΩ 2500 V /5.00 TΩ 5000 V /10.0 TΩ
1st effective measuring range		0.200 to 10.00 MΩ (50 V) 0.200 to 25.0 MΩ (125 V) 0.200 to 50.0 MΩ (250 V) 0.200 to 500 MΩ (500 V) 0.200 to 1000 MΩ (1000 V)		0.00 to 500 GΩ (250 V) 0.00 to 1.00 TΩ (500 V) 0.00 to 2.00 TΩ (1000 V) 0.00 to 5.00 TΩ (2500 V) 0.00 to 10.0 TΩ (5000 V)
PV Ω measurement	N / A	N / A	✓	N / A
Leakage current	N / A	N / A	N / A	1.00 nA to 1.20 mA
DC voltage	600 V	600 V	1000 V	1.00 kV
AC voltage	600 V	600 V	600 V	750 V
Low resistance measurement	✓	✓	N / A	N / A
Displaying 1-min. values	N / A	✓	N / A	N / A
Comparator decision response time	✓ 0.8 second	✓ 0.3 second	✓ 0.8 second (PV : 4 s)	N / A
AUTO power save	✓	✓	✓	✓
AUTO range	✓	✓	✓	✓
Data hold	MANUAL	MANUAL	MANUAL	MANUAL
Bluetooth® communication	N / A	✓ (With Z3210)	N / A	N / A
Bar graph	N / A	✓	N / A	✓
Backlight	✓	✓	✓	✓
Safety standard category	CAT III 600 V	CAT III 600 V	CAT III 600 V	CAT IV 600 V CAT III 1000 V
CE	✓	✓	✓	✓
Dustproof and waterproof	IP40	IP40	IP40	IP40
Drop proof	✓	✓	✓	N / A
Power supply	LR03 × 4 alkaline	LR03 × 4 alkaline	LR03 × 4 alkaline	LR03 × 6 alkaline
Dimensions (W × H × D)	159 × 177 × 53 mm 6.26 × 6.97 × 2.09 in	159 × 177 × 53 mm 6.26 × 6.97 × 2.09 in	159 × 177 × 53 mm 6.26 × 6.97 × 2.09 in	260 × 250.6 × 119.5 mm 10.24 × 9.87 × 4.70 in
Weight	600 g (21.2 oz)	640 g (22.6 oz)	600 g (21.2 oz)	2.8 kg (98.8 oz)

Lineup - Analog Meters



Product warranty for 3 years
Accuracy guaranteed for 1 year

Measurement parameters	1 Range	 IR4016 -20	Testing voltage (DC)	500 V		
			Effective maximum indicated value	100 MΩ		
			1st effective measuring range	0.1 MΩ to 50 MΩ		
			2nd effective measuring range	0.01 MΩ to 0.1 MΩ or less 50 MΩ or more to 100 MΩ		
	1 Range	 IR4017 -20	Testing voltage (DC)	500 V		
			Effective maximum indicated value	1000 MΩ		
			1st effective measuring range	1 MΩ to 500 MΩ		
			2st effective measuring range	0.5 MΩ to 1 MΩ or less 500 MΩ or more to 1000 MΩ		
	1 Range	 IR4018 -20	Testing voltage (DC)	1000 V		
			Effective maximum indicated value	2000 MΩ		
			1st effective measuring range	2 MΩ to 1000 MΩ		
			2nd effective measuring range	1 MΩ to 2 MΩ or less 1000 MΩ or more to 2000 MΩ		
3 Ranges	 3490	Testing voltage (DC)	250 V	500 V	1000 V	
		Effective maximum indicated value	100 MΩ		4000 MΩ	
		1st effective measuring range	0.05 MΩ to 50 MΩ		2 MΩ to 1000 MΩ	
		2nd effective measuring range	0.01 MΩ to 0.05 MΩ or less 50 MΩ to 100 MΩ		0.5 MΩ to 2 MΩ 1000 MΩ to 4000 MΩ	
Accuracy (Insulation)		±2% of scale length (1st effective measuring range) ±2% of scale length (2nd effective measuring range)				
AC Voltage		0 to 600 V				

Other	Operating temperature	0°C to 40°C, 90% RH or less (non-condensating)
	Storage temperature	-10°C to 50°C, 90% RH or less (non-condensating)
	Dustproof and waterproof	IP40
	Drop proof	YES
	Backlight	YES
	Safety standard category	CAT III 600 V
	Standards	EN61010 (Safety), EN61326 (EMC)
	Power supply Continuous operating time	LR6 alkaline battery ×4 20 hours
	Dimensions (W × H × D)	IR4016, IR4017, IR4018: 162 × 182 × 57 mm (6.38 × 7.17 × 2.24 in) 3490: 162 × 167 × 52 mm (6.38 × 6.57 × 2.05 in)
	Weight	IR4016, IR4017, IR4018: 820 g (28.9 oz), 3490: 840 g (29.6 oz)

Accessories



L9787

- TEST LEAD L9787 (1.2 m)
- Neck strap
- LR6 alkaline battery ×4
- Instruction manual

Order code	IR4016-20
Order code	IR4017-20
Order code	IR4018-20
Order code	3490

- Clamp
- Insulation
- DMMS
- Detectors
- Earth
- Power quality
- Power consumption
- Battery
- PV
- Logger
- LAN
- Signal
- Lux
- Temperature
- Sound

- Clamp
- Insulation
- DMMS
- Detectors
- Earth
- Power quality
- Power consumption
- Battery
- PV
- Logger
- LAN
- Signal
- Lux
- Temperature
- Sound

INSULATION TESTER IR4056-20, IR4056-21

CE * IR4056-20 only
 Product warranty for 3 years
 Accuracy guaranteed for 1 year



- With
- TEST LEAD L9787
 - Neck strap
 - LR6 alkaline battery x4
 - Instruction manual

IR4056-20



- With
- TEST LEAD SET WITH REMOTE SWITCH L9788-11
 - Neck strap
 - LR6 alkaline battery x4
 - Instruction manual

IR4056-21 Not CE marked



5 ranges

Comparator decision response time : 0.8 s

CAT III 600 V

INSULATION TESTER IR4057-50

CE
 Product warranty for 3 years
 Accuracy guaranteed for 1 year



New



L4930



L4938



L4935

- With
- CONNECTION CABLE L4930
 - ALLIGATOR CLIP SET L4935
 - TEST PIN SET L4938
 - Neck strap
 - LR6 alkaline battery x4
 - Instruction manual

IR4057-50



WIRELESS ADAPTER Z3210 (Option)
 Attach to enable Bluetooth® wireless technology

With Z3210

Bluetooth

Please see www.hioki.com for list of supported regions.

GENNECT Cross



5 ranges

Comparator decision response time : 0.3 s

Digital bar graph

CAT III 600 V

INSULATION TESTER (For Photovoltaic Generation Systems) IR4053-10

CE
 Product warranty for 3 years
 Accuracy guaranteed for 1 year



- With
- TEST LEAD L9787
 - Neck strap
 - LR6 alkaline battery x4
 - Instruction manual

IR4053-10



5 ranges

Comparator decision response time : 0.8 s

Comparator decision response time (PV) : 4 s

CAT III 600 V

Model	IR4056, 57-50	IR4053	Testing voltage (DC)					Basic accuracy	
Measurement parameters	Insulation resistance	✓	50 V	125 V	250 V	500 V	1000 V	-	
			Effective maximum indicated value (MΩ)	100	250	500	2000	4000	-
			1st effective measuring range (MΩ)	0.200 to 10.00	0.200 to 25.0	0.200 to 50.0	0.200 to 500	0.200 to 1000	±2% rdg ±2 dgt
			2nd effective measuring range (MΩ)	10.1 to 100.0	25.1 to 250	50.1 to 500	501 to 2000	1010 to 4000	±5% rdg
	PV Ω measurement	N / A	✓	Testing voltage (DC)		500 V	1000 V	-	
				Effective maximum indicated value (MΩ)	2000	4000	-		
1st effective measuring range (MΩ)				0.200 to 500	0.200 to 1000	±4% rdg			
DC Voltage	N / A	✓	Testing voltage (DC)		500 V	1000 V	±8% rdg		
			2nd effective measuring range (MΩ)	501 to 2000	1010 to 4000	±1.3% rdg ±4 dgt ¹			
AC Voltage	✓	N / A	Testing voltage (DC)		420.0 V ² /600 V		±1.3% rdg ±4 dgt ¹		
Low resistance measurement	✓	N / A	Testing voltage (DC)		420.0 V ² /600 V		±2.3% rdg ±8 dgt ¹		
			10.00 Ω/100.0 Ω/1000 Ω				±3% rdg ±2 dgt		

Operating temperature	IR4056, 57-50: -25°C to 65°C, 90% RH or less (non-condensating) IR4053: 0°C to 50°C, 90% RH or less (non-condensating)
Storage temperature	IR4056, 57-50: -25°C to 65°C, 90% RH or less (non-condensating) IR4053: -10 °C to 50°C, 90% RH or less (non-condensating)
Dustproof and waterproof	IP40
Standards	EN61326 (EMC) EN61557-1/-2/-4 ³ /-10
Power supply Continuous operating time	LR6 alkaline battery x4 20 hours
Dimensions (W x H x D)	159 x 177 x 53 mm (6.26 x 6.97 x 2.09 inch)
Weight	IR4056, 53: 600 g (21.2 oz) IR4057-50: 640 g (22.6 oz)

¹ Ranges in excess of 600 V/1000 V are outside the accuracy guarantee

² Minimum indicated value: 30.0 V

³ Subclause 4.3 of Part 4 (interchanging of test leads) is not applicable when L9788-10 is used

Order code **IR4056-20**

Order code **IR4056-21**

Order code **IR4057-50**

Order code **IR4057-90**

Order code **IR4053-10**

Order code **Z3210**

Model IR4057-90 includes Z3210 as a set



Product warranty for 3 years
Accuracy guaranteed for 1 year

HIGH VOLTAGE INSULATION TESTER IR3455




5 ranges
Bar graph
CAT IV 600 V, CAT III 1000 V



Measurement parameters	Testing voltage (DC)	250 V	0.00 MΩ to 500 GΩ
	: measuring range	500 V	0.00 MΩ to 1.00 TΩ
		1 kV	0.00 MΩ to 2.00 TΩ
		2.5 kV	0.00 MΩ to 5.00 TΩ
		5 kV	0.00 MΩ to 10.0 TΩ
Measurement current	1 mA (Test voltage 250 V to 1.00 kV)	0.5 mA (Test voltage 1.10 kV to 2.50 kV)	
Short-circuit current	2 mA or less		
Accuracy	±5% rdg ±5 dgt.*1		
Leakage current	10 nA/100 nA/1000 nA/10 μA/100 μA/1 mA		
	Guaranteed accuracy range: 1.00 nA to 1.20 mA		
	Basic accuracy: ±2.5% rdg ± 5 dgt.		
DC Voltage	±50 V to ±1.00 kV		
	Basic accuracy: ±5% rdg ±5 dgt		
AC Voltage	50 V to 750 V		
	Basic accuracy: ±5% rdg ±5 dgt		
Temperature	-10.0°C to 70.0°C		
	Basic accuracy: ±1.0°C		
Operating temperature	-10°C to 40°C, 80% RH or less (non-condensating)		
Storage temperature	-10°C to 50°C, 90% RH or less (non-condensating)		
Dustproof and waterproof	IP40 (EN60529)*2		
Standards	EN61010 (safety) , EN61326 (EMC)		
Power supply	LR6 (AA) alkaline battery x6: 5 hours		
Continuous operating time	BATTERY PACK 9459*3: 9 hours		
	AC ADAPTER 9418-15*3		
Dimensions (W x H x D)	260 x 250.6 x 119.5 mm (10.24 x 9.87 x 4.70 in)		
Weight	2.8 kg (98.8 oz)		

Order code **IR3455**

Accessories




- TEST LEAD 9750 -01 (Red), -02 (Black), -03 (Blue) (3m) (x1 ea.)
- ALLIGATOR CLIP 9751 -01 (Red), -02 (Black), -03 (Blue) (x1 ea.)
- Instruction manual
- LR6 alkaline battery x6
- USB cable
- CD-R (Data Analysis Software)

9750, 9751

*1 Up to [Test voltage (setting value)/Resistance measurable at 100 nA]
*2 When the USB terminal is covered with the shutter *3 Options

Options

IR401X, IR405X, 3490	
1	TEST LEAD SET WITH REMOTE SWITCH L9788-11
2	TEST LEAD WITH REMOTE SWITCH (RED) L9788-10
3	TIP PIN L9788-90
4	BREAKER PIN L9788-92
5	MAGNETIC ADAPTER 9804-01
6	MAGNETIC ADAPTER 9804-02
7	TEST LEAD L9787
8	CONNECTION CABLE SET L4930
9	ALLIGATOR CLIP SET L4935
10	TEST PIN SET L4938
11	BREAKER PIN L9787-91
12	WIRELESS ADAPTER Z3210

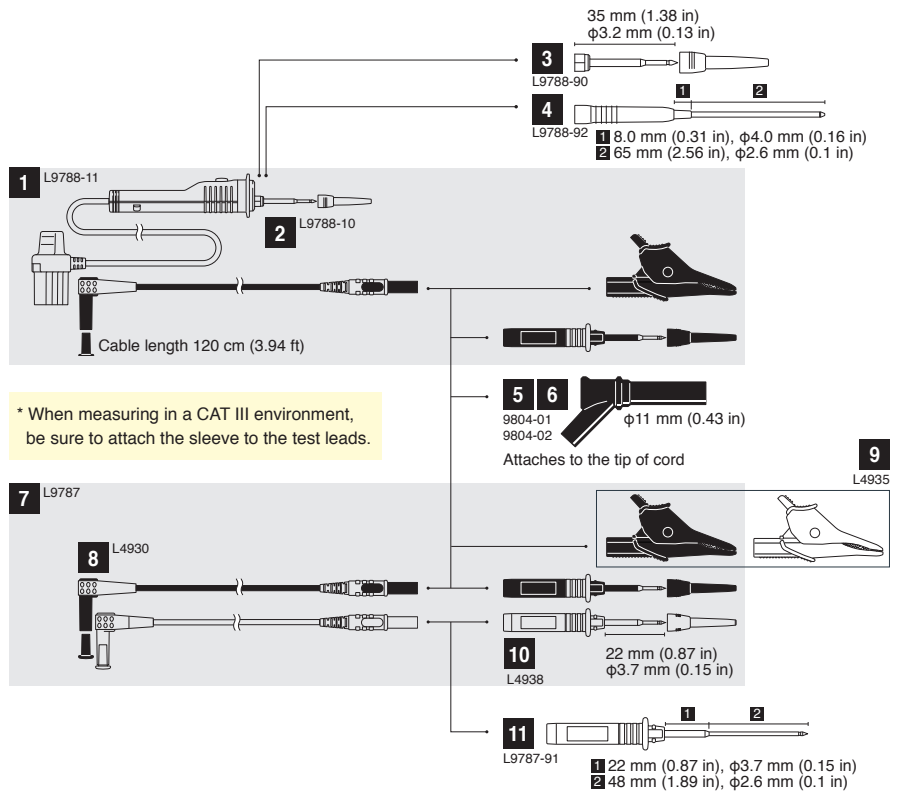


IR3455	
1	TEST LEAD 9750 -01 RED, 3 m (9.84 ft)
2	TEST LEAD 9750 -02 BLACK, 3 m (9.84 ft)
3	TEST LEAD 9750 -03 BLUE, 3 m (9.84 ft)
4	TEST LEAD 9750 -11 RED, 10 m (32.81 ft)
5	TEST LEAD 9750 -12 BLACK, 10 m (32.81 ft)
6	TEST LEAD 9750 -13 BLUE, 10 m (32.81 ft)
7	ALLIGATOR CLIP 9751 -01 RED
8	ALLIGATOR CLIP 9751 -02 BLACK
9	ALLIGATOR CLIP 9751 -03 BLUE
10	TEMPERATURE SENSOR 9631-01 Molded plastic thermistor type (1 m (3.28 ft))
11	TEMPERATURE SENSOR 9631-05 Molded plastic thermistor type (5 cm (0.16 ft))
12	AC ADAPTER 9418-15
13	BATTERY PACK 9459





DMM TESTERS

Designed and manufactured in Japan

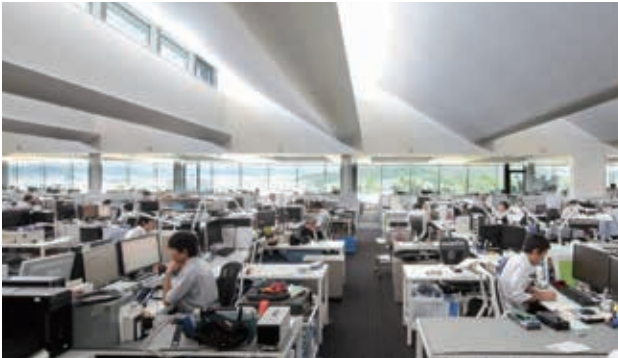

Development, design, and manufacturing processes for almost all Hioki digital multimeters are carried out at our headquarters in Nagano Prefecture.

Withstand a 1-meter drop onto a concrete floor




Products are dropped repeatedly until they are damaged in order to validate their impact performance. Test results are used to make design improvements and enhance durability.

The DT4200 Series Supports CAT IV Measurement Environments


The international standard IEC61010-1 regarding the safety of electrical testing equipment classifies the usage locations of measuring instruments into CAT II, CAT III, and CAT IV. The larger the number, the larger the transient impulse voltage that can be allowed. To safely test, you will need instruments that are designed to be used in locations characterized by its category.

Measurement Category

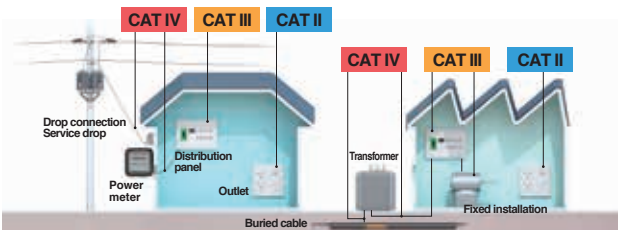

Measurement Category	Rated voltage to ground	Transient overvoltage		
		CAT II	CAT III	CAT IV
CAT II : Measurement at a point from the power plug to the equipment's power circuits, where equipment is directly connected to an outlet.	300 V	2500 V	4000 V	6000 V
CAT III : Measurement at a point on the power distribution cabling or power supply circuits, or at a point on the distribution panel to a distribution terminal behind an outlet, where equipment (for example a fixed installation) takes electricity directly from a distribution panel.	600 V	4000 V	6000 V	8000 V
CAT IV : Measurement at a point on a service drop to a building, or on the line from the drop connection to the power meter or distribution panel.	1000 V	6000 V	8000 V	12000 V

Rated voltage to ground

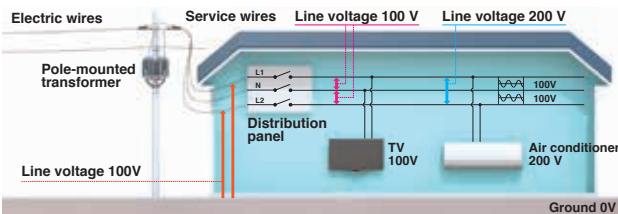


Marks

Measurement Category	Rated voltage to ground	Impulse Voltages
CAT IV	600V	An instrument labeled CAT IV 600V fully withstands impulse voltages of 8000V.
High-end models		: CAT III 1000 V/CAT IV 600 V
Standard models		: CAT III 1000 V/CAT IV 600 V
Pocket models		: CAT III 600 V/CAT IV 300 V

Accurately measure the voltage of the secondary side of inverters



Non-distorted current waveforms




Voltage waveforms with harmonic components




True RMS measurement correctly captures distorted current waveforms



Non-distorted current waveforms










Distorted waveforms due to switching power supplies










The secondary side of inverters include harmonic components. Waveforms containing harmonics are distorted and difficult to measure with accuracy. By using a low-pass filter to remove harmonic components, accurate measurement values can be obtained.

A measuring instrument uses one of two rectification methods, "True RMS" or "Mean". Using mean rectification assumes that the signal is based on a sine wave without distortions in order to calculate the value. Distorted waveforms cannot be measured accurately using this method.

Lineup

Measurement type	Electrical work	General use	General use	General use	Air conditioning/ instrumentation	Electrical work	General use	
Model	High-end models		Middle model	Standard models				
	DT4281	DT4282	DT4261	DT4252	DT4253	DT4255	DT4256	
Appearance								
AC measurement system	True RMS	True RMS	True RMS	True RMS	True RMS	True RMS	True RMS	
Display counts	60000	60000	6000	6000	6000	6000	6000	
DCV typical accuracy	±0.025% rdg ±2 dgt	±0.025% rdg ±2 dgt	±0.15% rdg ±2 dgt	±0.2% rdg ±5 dgt	±0.3% rdg ±5 dgt	±0.3% rdg ±3 dgt	±0.3% rdg ±3 dgt	
Frequency characteristics	20 Hz to 100 kHz	20 Hz to 100 kHz	40 Hz to 1 kHz	40 Hz to 1 kHz	40 Hz to 1 kHz	40 Hz to 1 kHz	40 Hz to 1 kHz	
Measurement parameters	DC voltage (Resolution)	1000 V (0.001 mV)	1000 V (0.001 mV)	1000 V/2000 V ¹ (0.1 mV)	1000 V (0.1 mV)	1000 V (0.1 mV)	1000 V (0.1 mV)	1000 V (0.1 mV)
	AC voltage (Resolution)	1000 V (0.001 mV)	1000 V (0.001 mV)	1000 V (0.001 V)	1000 V (0.001 V)	1000 V (0.001 V)	1000 V (0.001 V)	1000 V (0.001 V)
	DCV + ACV	1000 V	1000 V	1000 V	N / A	N / A	N / A	N / A
	DC current (Resolution)	600 mA (0.01 μA)	10 A (0.01 μA)	10 A (0.1 mA)	10 A (0.001 A)	60 mA (0.01 μA)	N / A	10 A (0.01 mA)
	AC current (Resolution)	600 mA (0.01 μA)	10 A (0.01 μA)	10 A (0.1 mA)	10 A (0.001 A)	N / A	N / A	10 A (0.1 mA)
	AC current (Clamp)	1000 A	N / A	1000 A	N / A	1000 A	1000 A	1000 A
	Resistance	600 MΩ	600 MΩ	60 MΩ	60 MΩ	60 MΩ	60 MΩ	60 MΩ
	Temperature	-40°C to 800°C	-40°C to 800°C	N / A	N / A	-40°C to 400°C	N / A	N / A
	Capacitance	100 mF	100 mF	10 mF	10 mF	10 mF	10 mF	10 mF
	Frequency	500 kHz	500 kHz	99 kHz	99 kHz	99 kHz	99 kHz	99 kHz
	Continuity check	✓	✓	✓	✓	✓	✓	✓
	Diode check	✓	✓	✓	✓	✓	✓	✓
	Conductance	N / A	✓	N / A	N / A	N / A	N / A	N / A
	Voltage detection	N / A	N / A	N / A	N / A	N / A	✓	✓
Additional functions	AUTO AC/DCV	N / A	N / A	✓	N / A	✓	✓	
	MAX/MIN/AVG	MAX/MIN	MAX/MIN	✓	✓	✓	✓	
	PEAK display	✓	✓	✓	N / A	N / A	N / A	
	Relative display	✓	✓	N / A	✓	✓	✓	
	Decibel conversion	✓	✓	N / A	N / A	N / A	N / A	
	Percentage conversion display (4-20 mA)	✓	✓	N / A	N / A	✓	N / A	
Display	AUTO range	✓	✓	✓	✓	✓	✓	
	Hold display value	AUTO /MANUAL	AUTO /MANUAL	AUTO /MANUAL	AUTO /MANUAL	AUTO /MANUAL	AUTO /MANUAL	
	Dual display	✓	✓	✓	✓	✓	✓	
	Bar graph display	N / A	N / A	✓	✓	✓	✓	
	Backlight	✓	✓	✓	✓	✓	✓	
Internal memory	✓	✓	N / A	N / A	N / A	N / A	N / A	
USB communication ²	✓	✓	✓	✓	✓	✓	✓	
Bluetooth [®] communication	N / A	N / A	✓ (with Z3210)	N / A	N / A	N / A	N / A	
Safety	Mis-insertion prevention shutters	✓	✓	✓	N / A	N / A	N / A	
	Circuit breaker false trip prevention	N / A	N / A	N / A	N / A	N / A	N / A	
	Safety standard category	CAT IV 600 V CAT III 1000 V	CAT IV 600 V CAT III 1000 V	CAT IV 600 V CAT III 1000 V	CAT IV 600 V CAT III 1000 V	CAT IV 600 V CAT III 1000 V	CAT IV 600 V CAT III 1000 V	CAT IV 600 V CAT III 1000 V
	CE	✓	✓	✓	✓	✓	✓	✓
	Dustproof and waterproof	IP40	IP40	IP54 ³	IP42	IP42	IP42	IP42
	Drop proof	✓	✓	✓	✓	✓	✓	✓
Auto power off	✓	✓	✓	✓	✓	✓	✓	
Power supply	LR6 x4 alkaline battery	LR6 x4 alkaline battery	LR6 x3 alkaline battery	LR03 x4 alkaline battery	LR03 x4 alkaline battery	LR03 x4 alkaline battery	LR03 x4 alkaline battery	
Dimensions (W × H × D)	93 × 197 × 53 mm 3.66 × 7.76 × 2.09 in	93 × 197 × 53 mm 3.66 × 7.76 × 2.09 in	87 × 185 × 47 mm 3.43 × 7.28 × 1.85 in	84 × 174 × 52 mm 3.31 × 6.85 × 2.05 in	84 × 174 × 52 mm 3.31 × 6.85 × 2.05 in	84 × 174 × 52 mm 3.31 × 6.85 × 2.05 in	84 × 174 × 52 mm 3.31 × 6.85 × 2.05 in	
Weight	650 g /22.9 oz	650 g /22.9 oz	480 g /16.9 oz	390 g /13.8 oz	390 g /13.8 oz	390 g /13.8 oz	390 g /13.8 oz	

*1: 2000 V is supported only when using the optional DC HIGH VOLTAGE PROBE P2000 *2: Requires optional COMMUNICATION PACKAGE(USB) DT4900-01 *3: Do not use in wet conditions.

Measurement type	Electrical work	General use	Electrical work	General use	Electrical work	Electrical work	Electrical work	
Model	Pocket models				3030-10	3244-60	3246-60	
	DT4221	DT4222	DT4223	DT4224				
Appearance								
AC measurement system	True RMS	True RMS	True RMS	True RMS	N / A	MEAN Value	MEAN Value	
Display count	6000	6000	6000	6000	N / A	4199	4199	
DCV typical accuracy	±0.5% rdg ±5 dgt	±0.5% rdg ±5 dgt	±0.5% rdg ±5 dgt	±0.5% rdg ±5 dgt	f.s. reading ±2.5%	±0.7% rdg ±4 dgt	±1.3% rdg ±4 dgt	
Frequency characteristics	40 Hz to 1 kHz	40 Hz to 1 kHz	40 Hz to 1 kHz	40 Hz to 1 kHz	N / A	50 Hz to 500 Hz	50 Hz to 500 Hz	
Measurement parameters	DC voltage (Resolution)	600 V (0.1 mV)	600 V (0.1 mV)	600 V (0.1 mV)	600 V (0.1 mV)	600 V	500 V (0.1 mV)	600 V
	AC voltage (Resolution)	600 V (0.001 V)	600 V (0.001 V)	600 V (0.001 V)	600 V (0.001 V)	600 V	500 V (0.001 V)	600 V
	DCV + ACV	N / A	N / A	N / A	N / A	N / A	N / A	N / A
	DC current (Resolution)	N / A	N / A	N / A	N / A	300 mA	N / A	N / A
	AC current (Resolution)	N / A	N / A	N / A	N / A	N / A	N / A	N / A
	AC current (Clamp)	N / A	N / A	N / A	N / A	N / A	N / A	N / A
	Resistance	60 MΩ	60 MΩ	60 MΩ	60 MΩ	3 kΩ	42 MΩ	42 MΩ
	Temperature	N / A	N / A	N / A	N / A	150°C	N / A	N / A
	Capacitance	N / A	10 mF	N / A	10 mF	N / A	N / A	N / A
	Frequency	9.9 kHz	9.9 kHz	9.9 kHz	9.9 kHz	N / A	N / A	N / A
	Continuity check	✓	✓	✓	✓	N / A	✓	✓
	Diode check	N / A	✓	N / A	✓	N / A	N / A	✓
	Conductance	N / A	N / A	N / A	N / A	N / A	N / A	N / A
Voltage detection	✓	N / A	✓	N / A	N / A	N / A	N / A	
Additional functions	AUTO AC/DCV	✓	N / A	✓	N / A	N / A	N / A	N / A
	MAX/MIN/AVG	N / A	N / A	N / A	N / A	N / A	N / A	N / A
	PEAK display	N / A	N / A	N / A	N / A	N / A	N / A	N / A
	Relative display	✓	✓	✓	✓	N / A	N / A	N / A
	Decibel conversion	N / A	N / A	N / A	N / A	N / A	N / A	N / A
	Percentage conversion display (4-20 mA)	✓	N / A	N / A	N / A	N / A	N / A	N / A
Display	AUTO range	✓	✓	✓	✓	N / A	✓	✓
	Hold display value	MANUAL	MANUAL	AUTO /MANUAL	AUTO /MANUAL	N / A	N / A	✓
	Dual display	N / A	N / A	N / A	N / A	N / A	N / A	N / A
	Bar graph display	✓	✓	✓	✓	N / A	N / A	N / A
	Backlight	✓	✓	✓	✓	N / A	N / A	✓
Internal memory	N / A	N / A	N / A	N / A	N / A	N / A	N / A	
USB communication ²	N / A	N / A	N / A	N / A	N / A	N / A	N / A	
Bluetooth [®] communication	N / A	N / A	N / A	N / A	N / A	N / A	N / A	
Safety	Mis-insertion prevention shutters	N / A	N / A	N / A	N / A	N / A	N / A	N / A
	Circuit breaker false trip prevention	N / A	N / A	✓	✓	N / A	N / A	N / A
	Safety standard category	CAT IV 300 V CAT III 600 V	CAT IV 300 V CAT III 600 V	CAT IV 300 V CAT III 600 V	CAT IV 300 V CAT III 600 V	CAT III 600 V	CAT III 300 V	CAT IV 300 V CAT III 600 V
	CE	✓	✓	✓	✓	N / A	✓	N / A
	Dustproof and waterproof	IP42	IP42	IP42	IP42	N / A	N / A	N / A
	Drop proof	✓	✓	✓	✓	✓	N / A	N / A
Auto power off	✓	✓	✓	✓	N / A	✓	✓	
Power supply	LR03 × 1 alkaline battery	LR03 × 1 alkaline battery	LR03 × 1 alkaline battery	LR03 × 1 alkaline battery	R6P × 2 manganese battery	CR2032 × 1 coin type battery	CR2032 × 1 coin type battery	
Dimensions (W × H × D)	72 × 149 × 38 mm 2.83 × 5.87 × 1.50 in	72 × 149 × 38 mm 2.83 × 5.87 × 1.50 in	72 × 149 × 38 mm 2.83 × 5.87 × 1.50 in	72 × 149 × 38 mm 2.83 × 5.87 × 1.50 in	95 × 141 × 39 mm 3.74 × 5.55 × 1.54 in	55 × 109 × 9.5 mm 2.17 × 4.29 × 0.37 in	30 × 182 × 26.5 mm 1.18 × 7.17 × 1.04 in	
Weight	190 g /6.7 oz	190 g /6.7 oz	190 g /6.7 oz	190 g /6.7 oz	280 g /9.9 oz	60 g /2.1 oz	80 g /2.8 oz	

Product warranty for 3 years
Accuracy guaranteed for 1 year



DIGITAL MULTIMETER DT4281, DT4282



DT4281

DT4282

High-end models

60000 Counts

DCV typical accuracy: $\pm 0.025\%$ rdg ± 2 dgt

CAT IV 600 V / CAT III 1000 V

Premium DMMs Deliver High Precision and Full Array of Features

extensive additional functionality

It is equipped with additional functions for more advanced measurements. It has a PEAK value display, useful for measuring ripple voltage in DC power supply systems, and a 4-20 mA/0-20 mA conversion display, useful for measuring instrumentation signals.

- Display of maximum/ minimum values
- Display of PEAK value
- Relative display
- Percent conversion 4-20mA

Electrical work



General use



Product warranty for 3 years
Accuracy guaranteed for 1 year



DIGITAL MULTIMETER DT4261



DT4261

Middle model

60000 Counts

DCV typical accuracy: $\pm 0.15\%$ rdg ± 2 dgt

CAT IV 600 V / CAT III 1000 V

With P2000 CAT IV 1000 V / CAT III 2000 V

Bluetooth® communication
Efficiently record measurement data

Bluetooth® communication

By attaching the Z3210 (Option), you can connect to the free application "GENNECT Cross" and use the Excel® direct input function.



With Z3210



DIGITAL MULTIMETER DT4252, DT4253, DT4255, DT4256

Product warranty for 3 years
Accuracy guaranteed for 1 year



DT4252

DT4253

DT4255

DT4256

Standard models

6000 Counts

DCV typical accuracy: $\pm 0.3\%$ rdg ± 5 dgt

CAT IV 600 V / CAT III 1000 V

Choose from 4 Models to Fit Your Application

Equipped with specialized functions catering to your needs

Air conditioning/instrumentation

- Measure low currents with 60 μ A range
- Test temperature
- 4 to 20 mA % display

Electrical work

- Prevent short-circuit accidents with a fast-blow fuse and current-limiting resistor



DIGITAL MULTIMETER DT4221, DT4222, DT4223, DT4224

Product warranty for 3 years
Accuracy guaranteed for 1 year



DT4221

DT4222

DT4223

DT4224

Pocket models

6000 Counts

DCV typical accuracy: $\pm 0.5\%$ rdg ± 5 dgt

CAT IV 300 V / CAT III 600 V

Compact and Convenient

Circuit breaker false trip prevention (DT4223, DT4224 Only)



Eliminate accidents such as tripped earth leakage breakers or flash arcs even when mistakenly inputting voltage while in resistance measurement mode





Model (DT42XX)	81	82	Basic accuracy	Basic accuracy
DC voltage	✓	✓	60.000 mV/600.00 mV/6.0000 V/60.000 V/600.00 V/1000.0 V	±0.025% rdg ±2 dgt
AC voltage	✓	✓	60.000 mV/600.00 mV/6.0000 V/60.000 V/600.00 V/1000.0 V	±0.2% rdg ±25 dgt
DCV + ACV	✓	✓	6.0000 V/60.000 V/600.00 V/1000.0 V	±0.3% rdg ±30 dgt
DC current	✓	N/A	600.00 µA/6000.0 µA/60.000 mA/600.00 mA	±0.05% rdg ±5 dgt
	N/A	✓	600.00 µA/6000.0 µA/60.000 mA/600.00 mA/6.0000 A/10.000 A	±0.05% rdg ±5 dgt
AC current	✓	N/A	600.00 µA/6000.0 µA/60.000 mA/600.00 mA	±0.6% rdg ±5 dgt
	N/A	✓	600.00 µA/6000.0 µA/60.000 mA/600.00 mA/6.0000 A/10.000 A	±0.6% rdg ±3 dgt
AC current (Clamp)	✓	N/A	10.00 A/20.00 A/50.00 A/100.0 A/200.0 A/500.0 A/1000 A	±0.6% rdg ±2 dgt
Resistance	✓	✓	60.000 Ω/600.00 Ω/6.0000 kΩ/60.000 kΩ/600.00 kΩ/6.0000 MΩ/60.00 MΩ/600.0 MΩ	±0.03% rdg ±2 dgt
Temperature	✓	✓	-40.0°C to 800.0°C	±0.5% rdg ±3°C
Capacitance	✓	✓	1.000 nF/10.00 nF/100.0 nF/1.000 µF/10.00 µF/100.0 µF/1.000 mF/10.00 mF/100.0 mF	±1% rdg ±5 dgt
Frequency	✓	✓	99.999 Hz/999.99 Hz/9.9999 kHz/99.999 kHz/500.00 kHz	±0.005% rdg ±3 dgt
Continuity check	✓	✓	(Short detection) 20 Ω/50 Ω/100 Ω/500 Ω or less, (Open detection) 220 Ω/ 250 Ω/ 300 Ω/ 600 Ω or more	-
Diode check	✓	✓	0.15 V/ 0.5 V/ 1 V/ 1.5 V/ 2 V/ 2.5 V/ 3 V (continuous buzzer sound, flashing red light)	-
Conductance	N/A	✓	600.00 nS	-

Operating temperature	-15°C to 55°C (non-condensating)
Storage temperature	-30°C to 60°C (non-condensating)
Dustproof and waterproof	IP40
Standards	EN61010 (Safety), EN61326 (EMC)
Power supply	LR6 alkaline battery x4
Continuous operating time	100 hours (backlight OFF)
Dimensions (W x H x D)	93 x 197 x 53 mm (3.66 x 7.76 x 2.09 in)
Weight	650 g (22.9 oz)

Accessories



- LR6 alkaline battery x 4
- Instruction manual

Order code **DT4281**
Order code **DT4282**

L9207-10



Model (DT42XX)	52	53	55	56	61	Basic accuracy	
DC voltage	N/A	✓	✓	✓	N/A	600.0 mV/6.000 V/60.00 V/600.0 V/1000 V	±0.3% rdg ±5 dgt
	✓	N/A	N/A	N/A	N/A	600.0 mV/6.000 V/60.00 V/600.0V/1000 V	±0.2% rdg ±5 dgt
AC voltage	✓	✓	✓	✓	✓	600.0 mV/6.000 V/60.00 V/600.0 V/1000 V/2000 V ²	±0.15% rdg ±2 dgt
DCV + ACV	✓	✓	✓	✓	✓	6.000 V/60.00 V/600.0 V/1000 V	±0.9% rdg ±3 dgt
DC current	N/A	✓	N/A	N/A	N/A	60.00 µA/600.0 µA/6.000 mA/60.00 mA	±1.0% rdg ±13 dgt
	N/A	✓	N/A	N/A	✓	60.00 mA/600.0 mA/6.000 A/10.00 A	±0.9% rdg ±3 dgt
	✓	N/A	N/A	N/A	✓	600.0 mA/6.000 A/10.00 A	±0.5% rdg ±3 dgt
AC current	N/A	✓	N/A	N/A	✓	6.000 A/10.00 A	±0.9% rdg ±5 dgt
	✓	N/A	N/A	N/A	✓	600.0 mA/6.000 A/10.00 A	±1.4% rdg ±3 dgt
AC current (Clamp)	N/A	✓	✓	✓	✓	10.00 A/20.00 A/50.00 A/100.0 A/200.0 A/500.0 A/1000 A	±0.9% rdg ±3 dgt
Resistance	✓	✓	✓	✓	✓	600.0 Ω/6.000 kΩ/60.00 kΩ/600.0 kΩ/6.000 MΩ/60.00 MΩ	±0.7% rdg ±5 dgt
Temperature	N/A	✓	N/A	N/A	N/A	-40.0°C to 400.0°C	±0.5% rdg ±2°C
Capacitance	✓	✓	✓	✓	✓	1.000 µF/10.00 µF/100.0 µF/1.000 mF/10.00 mF	±1.9% rdg ±5 dgt
Frequency	✓	✓	✓	✓	✓	99.99 Hz/999.9 Hz/9.999 kHz/99.999 kHz	±0.1% rdg ±1 dgt
Continuity check	✓	✓	✓	✓	✓	(Short detection) 25 Ω or less, (Open detection) 245 Ω or more	-
Diode check	✓	✓	✓	✓	✓	0.15 V to 1.5 V (continuous buzzer sound, flashing red light)	-
Voltage detection	N/A	N/A	✓	✓	N/A	(Detection voltage range) 40 V AC to 600 V AC, (Detection frequency range) 50 Hz/60 Hz	-

Operating temperature	DT4255, 56, 61: -25°C to 65°C (non-condensating) DT4252, 53: -10°C to 50°C (non-condensating)
Storage temperature	DT4255, 56, 61: -30°C to 70°C (non-condensating) DT4252, 53: -30°C to 60°C (non-condensating)
Dustproof and waterproof	DT4252, 53, 55, 56: IP42 DT4261: IP54 (Do not use in wet conditions)
Standards	EN61010 (Safety), EN61326 (EMC)
Power supply	DT4252, 53, 55, 56: LR03 alkaline battery x 4
Continuous operating time	DT4261: LR6 alkaline battery x 3 130 hours (backlight OFF)
Dimensions (W x H x D)	DT4252, 53, 55, 56: 84 x 174 x 52 mm (3.31 x 6.85 x 2.05 in) DT4261: 87 x 185 x 47 mm (3.43 x 7.28 x 1.85 in)
Weight	DT4252, 53, 55, 56: 390 g (13.8 oz) DT4261: 480 g (16.9 oz)

Model DT4261-90 includes Z3210 as a set



WIRELESS ADAPTER Z3210

Order code **DT4252**

Accessories



L9207-10
Included with DT425x



L9300
Included with DT4261

- Included with DT425x**
- alkaline battery (LR03) x 4
 - Instruction manual
- Included with DT4261**
- alkaline battery (LR6) x 3
 - Instruction manual

Order code **DT4253**

Order code **DT4255**

Order code **DT4256**

Order code **DT4261**

Order code **DT4261-90**

*1: DT4261 Only *2: Only when using the optional DC HIGH VOLTAGE PROBE P2000



Model (DT42XX)	21	22	23	24	Basic accuracy
DC voltage	✓	✓	✓	✓	600.0 mV/6.000 V/60.00 V/600.0 V
AC voltage	✓	✓	✓	✓	6.000 V/60.00 V/600.0 V
Resistance	N/A	✓	✓	✓	600.0 Ω/6.000 kΩ/60.00 kΩ/600.0 kΩ/6.000 MΩ/60.00 MΩ
Capacitance	N/A	✓	N/A	✓	1.000 µF/10.00 µF/100.0 µF/1.000 mF/10.00 mF
Frequency	✓	✓	✓	✓	99.99 Hz/999.9 Hz/9.999 kHz
Continuity check	✓	✓	✓	✓	(Short detection) 25 Ω or less, (Open detection) 245 Ω or more
Diode check	N/A	✓	N/A	✓	0.15 V to 1.5 V (continuous buzzer sound, flashing red light)
Voltage detection	✓	N/A	✓	N/A	(Detection voltage range) 80 V AC to 600 V AC, (Detection frequency range) 50 Hz/60 Hz

Operating temperature	DT4221, 22: -10°C to 50°C (non-condensating) DT4223, 24: -10°C to 65°C (non-condensating)
Storage temperature	DT4221, 22: -30°C to 60°C (non-condensating) DT4223, 24: -30°C to 70°C (non-condensating)
Dustproof and waterproof	IP42
Standards	EN61010 (Safety), EN61326 (EMC)
Power supply	LR03 alkaline battery x 1
Continuous operating time	40 hours (backlight OFF)
Dimensions (W x H x D)	72 x 149 x 38 mm (2.83 x 5.87 x 1.50 in)
Weight	190 g (6.7 oz)

Accessories



DT4911

- LR03 alkaline battery x1
- Instruction manual

Order code **DT4221**

Order code **DT4222**

Order code **DT4223**

Order code **DT4224**

Clamp
Insulation
DIMMS
Detectors
Earth
Power quality
Power consumption
Battery
PV
Logger
LAN
Signal
Lux
Temperature
Sound

HiTESTER 3030-10

Not CE marked

Product warranty for 3 years
Accuracy guaranteed for 1 year



CAT III 600 V

CARRYING CASE 9390



Order code **3030-10**

Accessories



- TEST LEAD L9207-30
- CARRYING CASE 9390
- R6P manganese battery x2
- Spare fuse
- Instruction manual

L9207-30



Measurement parameters	DC Voltage	0.3 V/3 V/12 V/30 V/120 V/300 V/600 V Accuracy: $\pm 2.5\%$ of f.s. reading
	AC Voltage	12 V/ 30 V/120 V/300 V/600 V Accuracy: $\pm 2.5\%$ of f.s. reading, (12V: $\pm 4\%$)
	DC Current	60 μ A/30 mA/300 mA Accuracy: $\pm 3\%$ of f.s. reading
	Resistance	0 to 3k Ω , R \times 1/ R \times 10/ R \times 100/ R \times 1k Accuracy: $\pm 3\%$ of scale length
	Battery check	0.9 to 1.8 V Accuracy: $\pm 6\%$ of f.s. reading
Other	Operating temperature	0°C to 40°C (non-condensating)
	Storage temperature	-10°C to 50°C (non-condensating)
	Power supply	R6P manganese battery x2
	Dimensions (W x H x D)	95 x 141 x 39 mm (3.74 x 5.55 x 1.54 in)
Weight	280 g (9.9 oz)	

CARD HiTESTER 3244-60

CE

Product warranty for 3 years
Accuracy guaranteed for 1 year



CAT III 300V, CAT II 600V

CARRYING CASE
C0204



Cord length
46cm (1.51 ft)

Order code **3244-60**

Accessories

- CARRYING CASE C0204
- Sleeves (Red, Black @ 1 each)
- CR2032 coin type battery x1
- Instruction manual



Measurement parameters	DC Voltage	420.0 mV/ 4.200 V/ 42.00 V/ 420.0 V/ 500 V Accuracy: $\pm 0.7\%$ rdg ± 4 dgt.
	AC Voltage	4.200 V/ 42.00 V/ 420.0 V/ 500 V Accuracy: $\pm 2.3\%$ rdg ± 8 dgt.
	Resistance	420.0 Ω / 4.200 k Ω / 42.00 k Ω / 420.0 k Ω / 4.200 M Ω / 42.00 M Ω Accuracy: $\pm 2.0\%$ rdg ± 4 dgt.
	Continuity check	Detection level: 50 Ω ± 40 Ω or less
	Operating temperature	0°C to 40°C (non-condensating)
Other	Storage temperature	-20°C to 60°C (non-condensating)
	Power supply	CR2032 coin type battery x1
	Dimensions (W x H x D)	55 x 109 x 9.5 mm (2.17 x 4.29 x 0.37 in)
	Weight	60 g (2.1 oz)

PENCIL HiTESTER 3246-60

Not CE marked

Product warranty for 3 years
Accuracy guaranteed for 1 year



CAT IV 300 V, CAT III 600 V

Cord length
80 cm (2.62 ft)



Test lead fits neatly
into back of instrument

Accessories


- Sleeves (Red, Black @ 1 each)
- CR2032 coin type battery x1
- Instruction manual

Order code **3246-60**



Measurement parameters	DC Voltage	420.0 mV/4.200 V/42.00 V/420.0 V/600 V Accuracy: $\pm 1.3\%$ rdg ± 4 dgt.
	AC Voltage	4.200 V/42.00 V/420.0 V/600 V Accuracy: $\pm 2.3\%$ rdg ± 8 dgt.
	Resistance	420.0 Ω /4.200 k Ω /42.00 k Ω /420.0 k Ω /4.200 M Ω /42.00 M Ω Accuracy: $\pm 2.0\%$ rdg ± 4 dgt.
	Continuity check	Detection level: 50 Ω ± 40 Ω or less
	Diode check	Judges the right direction only, Open terminal voltage 3.4 V or less
Other	Operating temperature	0°C to 40°C (non-condensating)
	Storage temperature	-20°C to 60°C (non-condensating)
	Power supply	CR2032 coin type battery x1
	Dimensions (W x H x D)	30 x 182 x 26.5 mm (1.18 x 7.17 x 1.04 in)
Weight	80 g (2.8 oz)	


Options

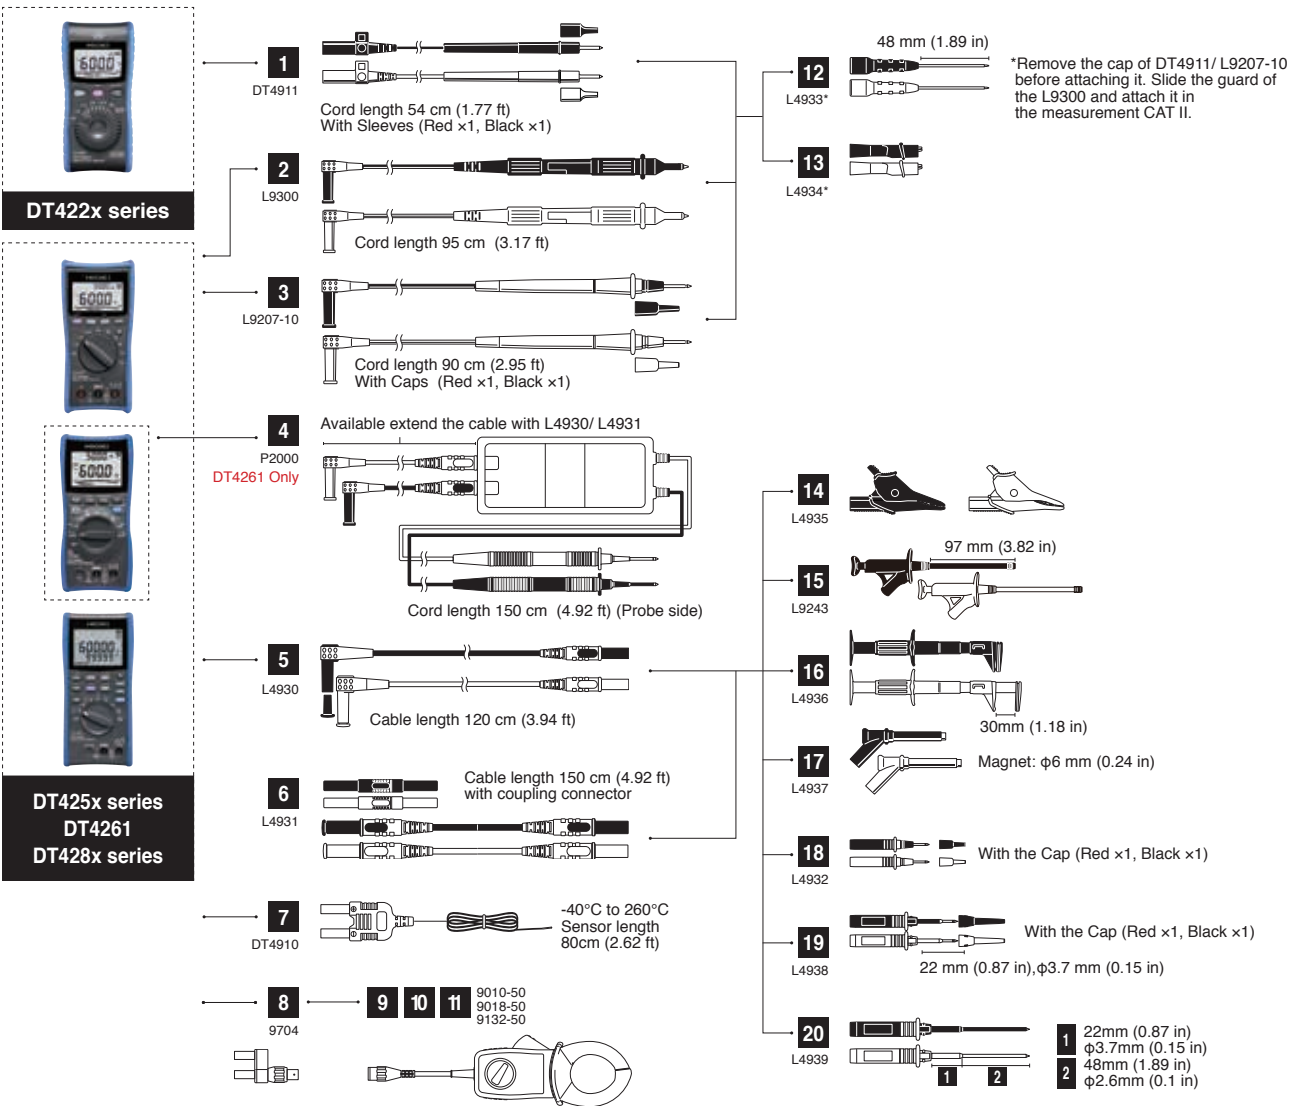

DT422x Series, DT425x Series, DT4261, DT428x Series	
1	TEST LEAD DT4911
2	TEST LEAD L9300
3	TEST LEAD L9207-10
4	DC HIGH VOLTAGE PROBE P2000 For DT4261
5	CONNECTION CABLE L4930
6	EXTENSION CABLE SET L4931
7	THERMOCOUPLES (K) DT4910
8	CONVERSION ADAPTER 9704
9	AC CLAMP ON PROBE 9010-50 ¹ 500 A AC, $\phi 46$ mm, Frequency characteristics: 40 Hz to 1 kHz
10	AC CLAMP ON PROBE 9018-50 ¹ 500 A AC, $\phi 46$ mm, Frequency characteristics: 40 Hz to 3 kHz
11	AC CLAMP ON PROBE 9132-50 ¹ 1000 A AC, $\phi 55$ mm, Frequency characteristics: 40 Hz to 1 kHz
12	CONTACT PIN SET L4933
13	SMALL ALLIGATOR CLIP SET L4934
14	ALLIGATOR CLIP SET L4935
15	GRABBER CLIP L9243
16	BUS BAR CLIP SET L4936
17	MAGNETIC ADAPTER SET L4937
18	TEST PIN SET L4932
19	TEST PIN SET L4938
20	BREAKER PIN L4939
21	COMMUNICATION PACKAGE (USB) DT4900-01 For DT425x series,DT428x series Windows 10
22	MAGNETIC STRAP Z5004 For DT422x series, DT425x series
23	MAGNETIC STRAP Z5020 Extra strength
24	CARRYING CASE C0200 For DT422x series
25	CARRYING CASE C0201 For DT425x series
26	CARRYING CASE C0202 For DT425x series,DT428x series
27	CARRYING CASE 3853 For DT425x series
28	CARRYING CASE C0207



¹ Adapter Model 9704 is required to connect AC CLAMP ON PROBES 9010-50, 9018-50 and 9132-50 to the DT4281, DT4253, DT4255, DT4256 or DT4261

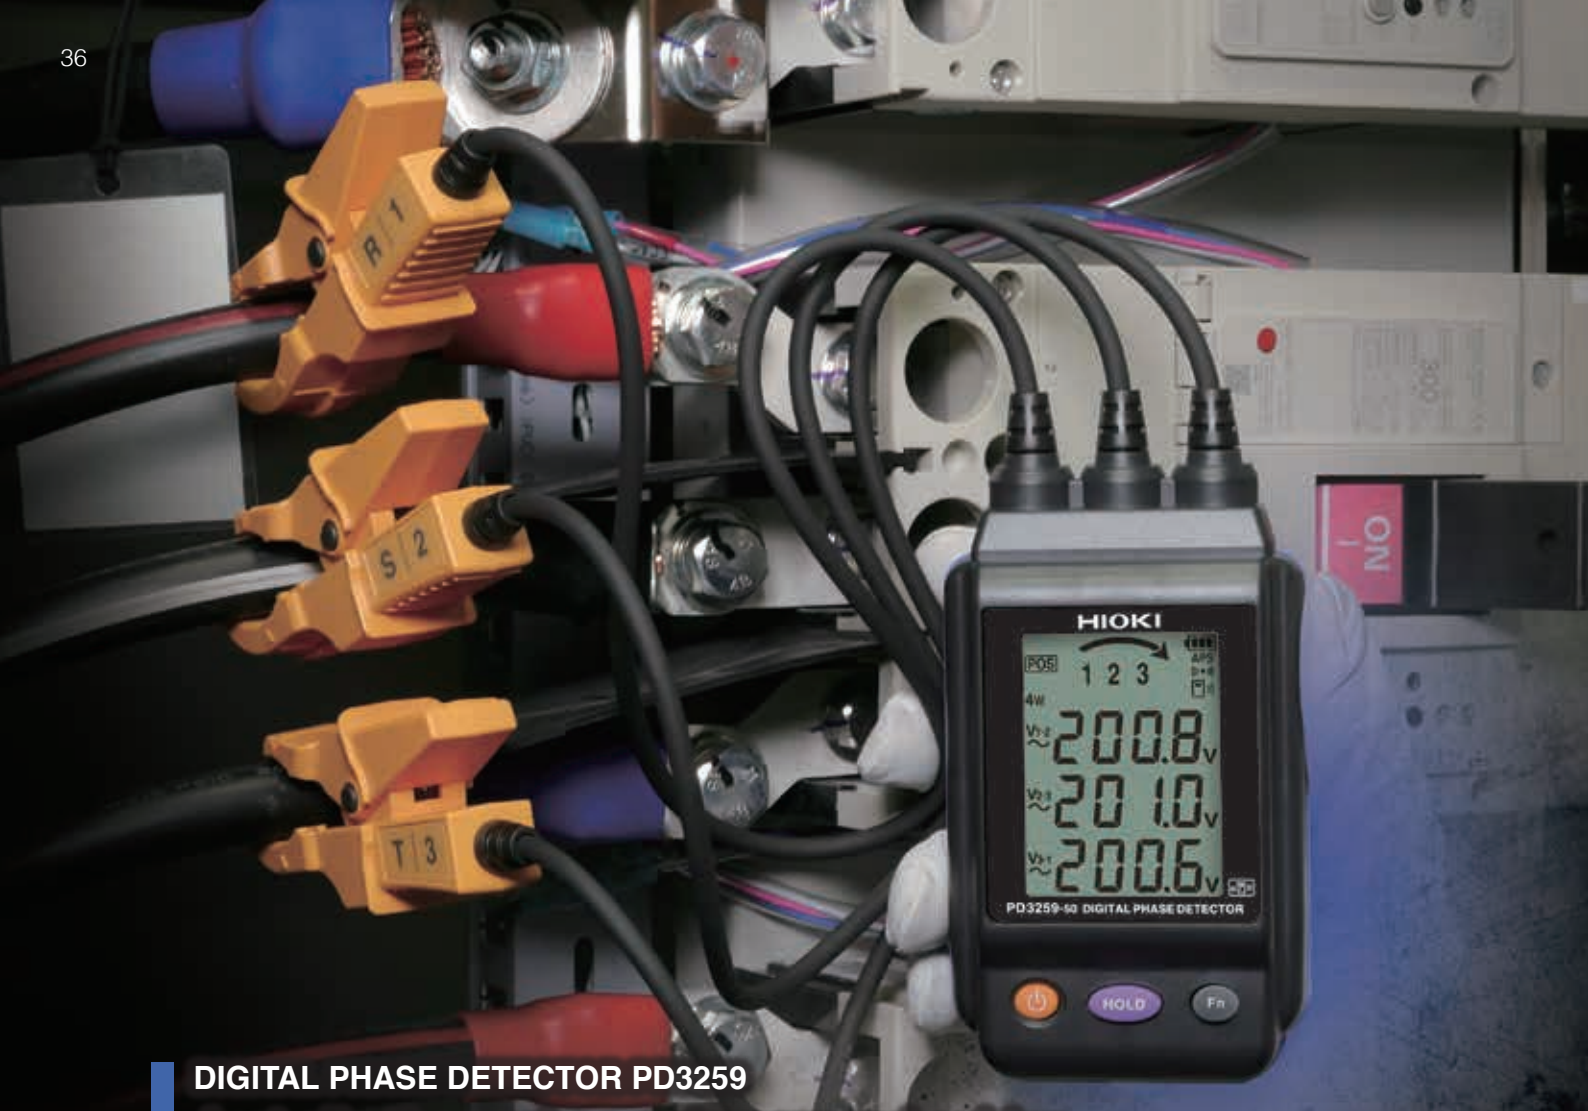


DIGITAL PHASE DETECTOR PD3259


Just clip the probes onto covered cables, and your 3-phase power line inspection is complete

phase sequence

3-phase voltage

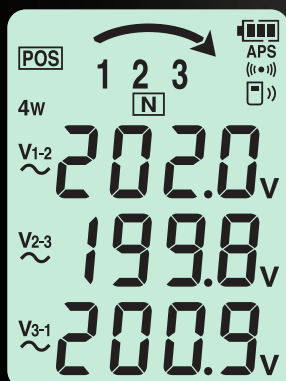

Positive phase sequence display

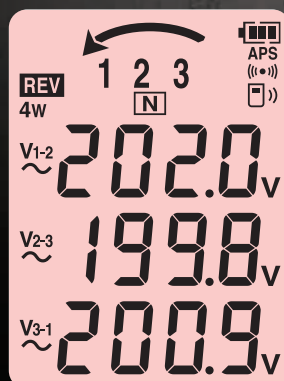

Negative phase sequence display



Display phase sequence, 3-phase voltage
Use as-is in work certification photos


PHASE DETECTORS

VOLTAGE DETECTORS



Product warranty for 3 years
Accuracy guaranteed for 1 year

DIGITAL PHASE DETECTOR PD3259-50

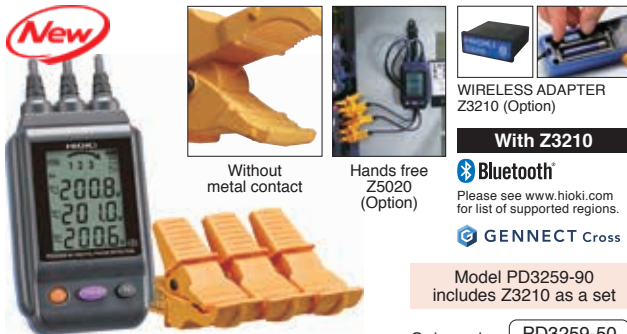

Accessories

- CARRYING CASE C0203

Dimensions:

- W135 mm (5.31 in) x H265 mm (10.43 in) x D65 mm (2.56 in)
- LR6 alkaline battery x4
- Color clips (White x2, red x2, blue x2, yellow x2)
- Spiral tubes (black x1)
- Instruction manual

Options

- MAGNETIC STRAP Z5020

WIRELESS ADAPTER Z3210 (Option)

With Z3210

Bluetooth

Please see www.hioki.com for list of supported regions.

GENNECT Cross

Model PD3259-90 includes Z3210 as a set

Order code PD3259-50

Order code PD3259-90

Order code Z3210



C0203 Color clip Z5020

Attach to enable Bluetooth® wireless technology



CAT IV 600 V

Soil, residue, or moisture on the insulated wires may result in lower voltage and power values than their true values. Use a dry cloth to remove before measuring.

Measurement parameters	Detection functions	Phase detection, open phase, prediction of ground phase (Three-phase line)
	Three-phase AC voltage (line-to-line voltage and voltage to ground)	90.0 V to 520.0 V AC (Three-phase line) accuracy: ±2.0% rdg ±8 dgt
	Frequency	45 Hz to 66 Hz Accuracy: ±0.5% rdg ±1 dgt
	Measurement targets	Covered cables, metal portions*1 Finished outer diameter 6 to 30 mm (0.24 to 1.18 in)
Other	Operating temperature	-25°C to 65°C, 80% RH or less (non-condensating)
	Storage temperature	-25°C to 65°C, 80% RH or less (non-condensating)
	Dustproof and waterproof Standards	IP54 (device body only) EN61010 (Safety), EN61326 Class A (EMC)
	Power supply Continuous operating time	LR6 alkaline battery x4 5 hours (Without Z3210)
	Dimensions (W x H x D)	84 x 146 x 46 mm (3.31 x 5.75 x 1.81 in) Cable length 50 cm (1.64 ft)
Weight	590 g (20.8 oz)	

*1 Shielded cables not supported



Product warranty for 3 years
Accuracy guaranteed for 1 year

PHASE DETECTOR PD3129, PD3129-10



φ2.4 mm (0.09 in) to φ17 mm (0.67 in)

PD3129: Thin Conductors

φ7 mm (0.28 in) to φ40 mm (1.57 in)

PD3129-10: Thick Conductors

Accessories

- CARRYING CASE
- Strap
- R6P manganese battery x2
- Spiral tube
- Instruction manual

Order code PD3129

Order code PD3129-10



PD3129 CAT IV 600 V

PD3129-10 CAT IV 600 V, CAT III 1000 V

Measurement parameters	Detection functions	Phase detection (positive and negative)
	Voltage range	PD3129 70 to 600 V AC (continuous sine wave) PD3129-10 70 to 1000 V AC (continuous sine wave)
	Frequency range	45 Hz to 66 Hz
	Measurement targets	PD3129 2.4 mm (0.09 in) to 17 mm (0.67 in) of insulated wiring PD3129-10 7 mm (0.28 in) to 40 mm (1.57 in) of insulated wiring
Phase-detection indication	Positive	4 LEDs lit in clockwise order and the buzzer sounds intermittently, green arrow lights up
	Negative	4 LEDs lit in counterclockwise order and the buzzer sounds continuously
Other	Functions	Live line check, Battery check function
	Operating temperature	0°C to 40°C, 80% RH or less (non-condensating)
	Storage temperature	-20°C to 60°C, 80% RH or less (non-condensating)
	Standards	EN61010 (Safety), EN61326 (EMC)
	Power supply Continuous operating time	R6P manganese battery x 2 5 hours
Dimensions (W x H x D)	70 x 75 x 30 mm (2.76 x 2.95 x 1.18 in) Cable length 70 cm (2.30 ft)	
Weight	PD3129: 200 g (7.1 oz), PD3129-10: 240 g (8.5 oz)	



Product warranty for 3 years
Accuracy guaranteed for 1 year

VOLTAGE DETECTOR 3481-20



with LED light

Red for voltage detection

Accessories

- LR44 button alkaline battery x3
- Instruction manual

Order code 3481-20



CAT IV 600 V

Measurement parameters	Operating voltage range	40 to 600 V AC (50Hz/60Hz)
	Maximum sensitivity variable range	40 to 80 V AC (50Hz/60Hz)
Other	Pilot light	Red LED lights up and the buzzer sounds when the wire is live
	Operating temperature	0°C to 40°C, 80% RH or less (non-condensating)
	Storage temperature	-20°C to 60°C, 80% RH or less (non-condensating)
	Standards	EN61010 (Safety), EN61326 (EMC)
	Power supply Continuous operating time	LR44 button alkaline battery x 3 5 hours
Dimensions (W x H x D)	20 x 126 x 15 mm (0.79 x 4.96 x 0.59 in)	
Weight	30 g (1.1 oz)	




EARTH TESTER FT6031

**Remarkable waterproof and dustproof performance
One-touch testing for all 4 ground types**


Ground types		
Type	Criterion	Locations used
Class A	10 Ω or less	Special high voltage, high voltage
Class B	As per calculations	Transformer neutral point
Class C	10 Ω or less* 500 Ω or less*	Low voltages in excess of 300 V
Class D	10 Ω or less* 500 Ω or less*	Low voltages of 300 V or less

3
electrode method
(classes A to D)

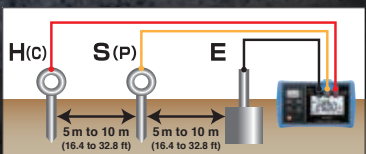

Measurement is performed after inserting an auxiliary grounding rod into the soil. For accurate measurement, position E-S(P)-H(C) in a straight line at an interval of about 5 to 10 m.

2
electrode method
(classes D)

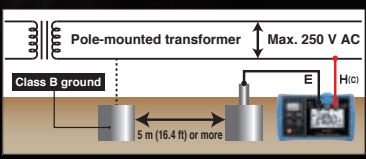

Class D ground installations can be measured by using the Class B ground of a pole-mounted transformer. The measured value will include the resistance value of the Class B ground. The distribution panel's main ground terminal is typically connected to the power supply's ground line.



Sturdy, thin rods drive easier into the ground



Cord winders make cleanup a snap

*With ground-fault interrupter that trips within 0.5 sec.

EARTH TESTERS

EARTH TESTER FT6031-50

Product warranty for 3 years
Accuracy guaranteed for 1 year



- 2-electrode Class D
- 3-electrode Class A to D
- CAT IV 100 V, CAT III 150 V, CAT II 300 V

WIRELESS ADAPTER Z3210 (Options): Attach to enable Bluetooth® wireless technology
Model FT6031-90 includes Z3210 as a set

With Z3210

Bluetooth
Please see www.hioki.com for list of supported regions.

GENNECT Cross Z3210*

- Order code **FT6031-50**
- Order code **FT6031-90**
- Order code **Z3210**

Measurement parameters	Measurement system	Two-electrode method (Class D) Three-electrode method (Class A to D)
	Range configuration : Accuracy	20 Ω (0 to 20.00 Ω): ±1.5% rdg ±8 dgt 200 Ω (0 to 200.0 Ω): ±1.5% rdg ±4 dgt 2000 Ω (0 to 2000 Ω): ±1.5% rdg ±4 dgt
	Earth potential : Accuracy	0 to 30.0 Vrms 50/60 Hz: ±2.3% rdg ±8 dgt DC: ±1.3% rdg ±4 dgt
	Operating temperature	-25°C to 65°C (non-condensating)
Other	Storage temperature	-25°C to 65°C, 80% RH or less (non-condensating)
	Dustproof and waterproof	IP65, IP67
	Standards	EN61010 (Safety, Main unit, Measuring circuit), EN61326 (EMC), EN61557 (Earth tester)
	Power supply	LR6 alkaline battery x 4
	Number of uses	5000 times*1
	Dimensions (W x H x D)	185 x 111 x 44 mm (7.28 x 4.37 x 1.73 in)
	Weight	570 g (20.1 oz)

*1 3-electrode method, measuring 10 Ω in 10-second intervals, Without Z3210

FT6031 • FT3151

Accessories

- CARRYING CASE C0106
- AUXILIARY EARTHING ROD L9840 (2 piece set, 270 mm/10.63 in, Stainless steel)
- MEASUREMENT CABLE L9842-11 (Yellow 10 m (32.81 ft) length, equipped with winder)
- MEASUREMENT CABLE L9842-22 (Red 20 m (65.62 ft) length, equipped with winder)
- MEASUREMENT CABLE L9841 (black 4 m (13.12 ft) length)
- LR6 alkaline battery x 6
- Instruction manual

ANALOG EARTH TESTER FT3151

Product warranty for 3 years
Accuracy guaranteed for 1 year



- 2-electrode Class D
- 3-electrode Class A to D
- CAT II 300 V



Order code **FT3151**

Measurement parameters	Measurement system	Two-electrode method (Class D) Three-electrode method (Class A to D)
	Range configuration : Accuracy	10 Ω (0 to 11.5 Ω): ±0.25 Ω 100 Ω (0 to 115 Ω): ±2.5 Ω 1000 Ω (0 to 1150 Ω): ±25 Ω
	Earth potential: Accuracy	0 to 30 V: ±3.0% f.s.
	Operating temperature	0°C to 40°C, 80% RH or less (non-condensating)
Other	Storage temperature	-10°C to 50°C, 80% RH or less (non-condensating)
	Dustproof and waterproof	IP40 (EN60529)
	Standards	EN61010 (Safety, measuring circuit, probe), EN61326 (EMC), EN61557-1/-5 (Earth tester)
	Power supply	LR6 alkaline battery x 6
	Number of uses	1100 times*1
	Dimensions (W x H x D)	164 x 119 x 88 mm (6.46 x 4.69 x 3.46 in)
	Weight	760 g (26.8 oz)

*1 30 sec. measurement/30 sec. rest, 3-electrode method, 575 Hz, auxiliary grounding electrode resistance of 100 Ω, measuring 10 Ω in the instrument's x 1 Ω range

Options

- 1 MEASUREMENT CABLE L9843-51 50 m (164.04 ft)
- 2 MEASUREMENT CABLE L9843-52 50 m (164.04 ft)
- 3 MEASUREMENT CABLE L9844 For earthing terminal board red/yellow/black 1.2 m (3.94 ft) each
- 4 TEST LEAD L9787 For simplified measurement method
- 5 EARTH NETS 9050 2 sheets in set
- 6 SHOULDER STRAP Z5022



CLAMP ON EARTH TESTER FT6380-50

Product warranty for 3 years
Accuracy guaranteed for 1 year



- φ32 mm
- True RMS
- For multi-grounded systems
- CAT IV 600 V

WIRELESS ADAPTER Z3210 (Options): Attach to enable Bluetooth® wireless technology
Model FT6380-90 includes Z3210 as a set

With Z3210

Bluetooth
Please see www.hioki.com for list of supported regions.

GENNECT Cross Z3210*

- Order code **FT6380-50**
- Order code **FT6380-90**
- Order code **Z3210**

Accessories

- Carrying case
- Resistance check loop (1 Ω, 25 Ω)
- Strap
- LR06 alkaline battery x2
- Instruction manual

Measurements for Multi-Grounded Systems



Hazardous Storage Tanks Transmission Towers

Measurement parameters	Measurement system	Instrument has two cores for voltage injection and current measurement. Total circuit loop resistance is calculated from defined voltage and measured current.*1
	Earthing resistance range	0.20 Ω/2.00 Ω/20.00 Ω/50.0 Ω/100.0 Ω/200.0 Ω/400 Ω/600 Ω/1200 Ω/1600 Ω Guaranteed accuracy range: 0.02 Ω to 1600 Ω Accuracy: ±1.5% rdg ±0.02 Ω
	AC Current range	20.00 mA/200.0 mA/2.000 A/20.00 A/60.0 A Guaranteed accuracy range: 1.00 mA to 60.0 A Accuracy: ±2.0% rdg ±0.05 mA
	Operating temperature	-10°C to 50°C, 80% RH or less (non-condensating)
Other	Storage temperature	-20°C to 60°C, 80% RH or less (non-condensating)
	Dustproof and waterproof	IP40 (EN60529)
	Standards	EN61010 (Safety), EN61326 (EMC)
	Power supply	LR6 alkaline battery x 2
	Continuous operating time	35 hours (backlight OFF)
	Dimensions (W x H x D)	73 x 218 x 43 mm (2.87 x 8.58 x 1.69 in)
	Weight	620 g (21.9 oz)

*1 For multi-grounded systems only. In a multi-grounded system, the larger the number of grounding poles, the more accurate the measured value.




POWER QUALITY ANALYZER PQ3198, PQ3100
Monitor power quality and analyze
the cause of equipment issues



Power anomalies are a major cause of equipment malfunction and damage. The PQ3198 and PQ3100 detect power supply abnormalities without fail to help diagnose the cause of problems.

Capture all of these power anomalies simultaneously

- Transient voltages
- Voltage swells
- Voltage dips
- Interruptions
- Frequency fluctuations
- Inrush current
- Harmonics
- High-order harmonics

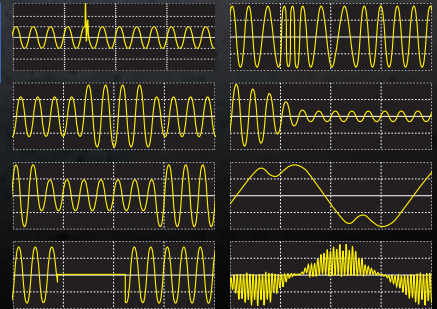

POWER QUALITY ANALYZERS




Product warranty for 3 years
Accuracy guaranteed for 1 year

POWER QUALITY ANALYZER PQ3198, PQ3100

Shared features: Side

Left side



- 1 Power switch
- 2 AC adapter terminal
- 3 Charging indicator
- 4 Cable hook

Right side



- 5 Strap attachment point
- 6 SD card terminal
- 7 USB terminal
- 8 LAN terminal
- 9 RS-232C terminal
- 10 External I/O terminal



CAT IV 600 V



Voltage input terminals (4 channels: channels 1/2/3 and channel 4 are isolated from each other)
Current input terminals (4 channels)



CAT IV 600 V, CAT III 1000 V



Voltage input terminals (4 channels)
Current input terminals (4 channels)

Model	PQ3198 (High-end model)	PQ3100 (Standard model)
Measurement lines	1-phase/2-wire, 1-phase/3-wire, 3-phase/3-wire, 3-phase/4-wire + CH 4	
Fundamental frequency	DC/50 Hz/60 Hz/400 Hz	DC/50 Hz/60 Hz
Voltage ranges Accuracy	Voltage measurement: 600.00 V rms Transient measurement: 6.0000 kV peak ±0.1% of nominal voltage	Voltage measurement: 1000.0 V rms or DC Transient measurement: 2.200 kV peak ±0.2% of nominal voltage
Current ranges Accuracy	500.00 mA to 5.0000 kA AC ¹ ±0.1% rdg ±0.1% f.s. + current sensor accuracy	(AC) 50.000 mA to 5.0000 kA ¹ (DC) 10.000 A to 2.0000 kA ¹ ±0.1% rdg ±0.1% f.s.+ current sensor accuracy
Power ranges Accuracy	300.00 W to 3.0000 MW (AC) ±0.2% rdg ±0.1% f.s. + current sensor accuracy (DC) ±0.5% rdg ±0.5% f.s.+ current sensor accuracy (CH4 Only)	50.000 W to 6.0000 MW (AC) ±0.2% rdg ±0.1% f.s.+ current sensor accuracy (DC) ±0.5% rdg ±0.5% f.s.+ current sensor accuracy
Measurement parameters	<ol style="list-style-type: none"> Transient voltage: 2MHz sampling Frequency cycle: calculated as one cycle Voltage (1/2) RMS: one cycle calculation refreshed every half cycle Current (1/2) RMS: half-cycle calculation Voltage swell, voltage dips, voltage interruption Inrush current Voltage waveform comparison Instantaneous flicker value: As per IEC61000-4-15 200 ms frequency: calculated as 10 or 12 cycles, 40 to 70 Hz 10 sec frequency: calculated as the whole-cycle time during the specified 10 s period, 40 to 70 Hz Voltage waveform peak, Current waveform peak Voltage, current, active power, apparent power, reactive power, active energy, reactive energy, power factor, displacement power factor, voltage unbalance factor, current unbalance factor, and efficiency High-order harmonic component (voltage/current): 2 kHz to 80 kHz Harmonic/Harmonic phase angle (voltage/current), harmonic power: 0th to 50th orders Harmonic voltage-current phase angle: 1st to 50th orders Total harmonic distortion factor (voltage/current) Inter harmonic (voltage/current): 0.5th to 49.5th order K Factor (multiplication factor) IEC Flicker, Δ V10 Flicker 	<ol style="list-style-type: none"> Transient voltage: 200 kHz sampling Frequency cycle: calculated as one cycle Voltage (1/2) RMS - Current (1/2) RMS: one cycle calculation refreshed every half cycle Voltage swell, voltage dips, voltage interruption, RVC: Voltage (1/2) RMS calculation Inrush current Frequency 200 ms: calculated as 10 or 12 cycles 10-sec frequency: calculated as the whole-cycle time during the specified 10 s period Voltage waveform peak, current waveform peak Voltage, current, active power, apparent power, reactive power, active energy, apparent energy, reactive energy, energy cost, power factor, displacement power factor, voltage unbalance factor, current unbalance factor Voltage crest factor, current crest factor Harmonic/Harmonic phase angle (voltage/current), harmonic power: 0th to 50th orders Harmonic voltage-current phase angle: 1st to 50th orders Total harmonic distortion factor (voltage/current) Inter harmonic (voltage/current): 0.5th to 49.5th orders K Factor (multiplication factor) IEC Flicker, Δ V10 Flicker
Record	Repeated ON: 1 year, maximum recording event: 9999 × 366 days (up to 9999 events per day) Repeated off: 35 days, maximum recording event: 9999 events	Maximum recording interval: 1 year, maximum number of recordable events: 9999 × 365 days
Setup assistance	Simplified setup function	QUICK SET (navigation-style assistance from connecting the instrument to the start of recording)
Interfaces	SD/SDHC memory card ² , RS-232C, USB2.0, LAN	
Operating temperature	0°C to 30°C (95% RH or less), 30°C to 50°C (80% RH or less) (non-condensating)	-20°C to 50°C (80% RH or less) (non-condensating)
Storage temperature	10°C greater than operating temperature and humidity range	
Standards	EN61010 (Safety), EN61326 Class A (EMC)	
IEC 61000-4-30	Class A	Class S
Power supply	AC ADAPTER Z1002, BATTERY PACK Z1003	
Battery operating time	3 hours	8 hours
Dimensions (W × H × D)	300 × 211 × 68 mm (11.81 × 8.31 × 2.68 in)	
Weight	2.6 kg (91.7 oz) (including BATTERY PACK)	2.5 kg (88.2 oz) (including BATTERY PACK)



PQ3198 Accessories

- VOLTAGE CORD L1000
- AC ADAPTER Z1002
- BATTERY PACK Z1003
- PQ ONE (software CD)
- SD MEMORY CARD Z4001
- USB cable
- Color clips
- Spiral tubes
- Strap
- Measurement guide
- User manual

PQ3100 Accessories

- VOLTAGE CORD L1000-05
- AC ADAPTER Z1002
- BATTERY PACK Z1003
- PQ ONE (software CD)
- USB cable
- Color clips
- Spiral tubes
- Strap
- Measurement guide
- User manual

- Order code **PQ3198**
- Order code **PQ3198-92** Value Kits: PQ3198, CT7136³ (600A) × 4, L1021-02×3, CARRYING CASE C1009
- Order code **PQ3198-94** Value Kits: PQ3198, CT7045³ (6000A) × 4, L1021-02×3, CARRYING CASE C1009
- Order code **PQ3100**
- Order code **PQ3100-91** Value Kits: PQ3100, CT7136³ (600A) × 2, SD MEMORY CARD 2GB Z4001, CARRYING CASE C1009
- Order code **PQ3100-92** Value Kits: PQ3100, CT7136³ (600A) × 4, SD MEMORY CARD 2GB Z4001, CARRYING CASE C1009
- Order code **PQ3100-94** Value Kits: PQ3100, CT7045³ (6000A) × 4, SD MEMORY CARD 2GB Z4001, CARRYING CASE C1009

¹ Depends on current sensor in use

² Use only SD Cards sold by HIOKI. Compatibility and performance are not guaranteed for PC cards made by other manufacturers.

³ For more detailed information on CT7136, CT7045, and options, please refer to p.44 and p.45.



CLAMP ON POWER LOGGER PW3365, PW3360

Accurately measure power consumption, also available with non-contact voltage sensor for added safety

SAFETY VOLTAGE SENSOR PW9020
(for PW3365 only)

- Clamp on top of cable insulation
- Quick setup
- Safely avoid contact with live parts




Compared with standard alligator clips that are hard to use and require metal-to-metal contact



Toggle displays to easily verify data



List display



Demand Graph



Waveform



Trend Graph

QUICK SET navigation



Highly Intuitive



Check Connection Status

POWER CONSUMPTION



Product warranty for 3 years
Accuracy guaranteed for 1 year

CLAMP ON POWER LOGGER PW3365, PW3360



SAFETY VOLTAGE SENSOR PW9020
Compatible with PW3365 only
Finished outer diameter
φ6 mm (0.24 in) to φ30 mm (1.18 in)



PW3365
GENNECT One

CAT IV 300 V, CAT III 600 V



PW3360
GENNECT One

CAT IV 300 V, CAT III 600 V

Model	PW3365 + PW9020	PW3360
Measurement line	1-phase/2-wire (1/2/3 circuits), 1-phase/3-wire (1 circuit), 3-phase/3-wire (1 circuit), 3-phase/4-wire (1 circuit), Current only: 1 to 3 channels	
Frequency	50 Hz/60 Hz	
Voltage ranges	400 V AC (Effective measurement range: 90.0 V to 520.0 V)	600 V AC (Effective measurement range: 90.0 V to 780.0 V)
Accuracy	±1.5% rdg ±0.2% f.s. (combined accuracy with PW9020)	±0.3% rdg ±0.1% f.s.
Current ranges	500.00 mA AC to 5.0000 kA ¹ (Leak clamp on sensor only: 50.000 mA AC to 5.0000 A)	
Accuracy	±0.3% rdg ±0.1% f.s. + current sensor accuracy	
Power ranges	200.00 W to 6.0000 MW	300.00 W to 9.0000 MW
Accuracy	±2.0% rdg ±0.3% f.s. + current sensor accuracy	±0.3% rdg ±0.1% f.s. + current sensor accuracy
Measurement parameters	Voltage	RMS value, fundamental wave value, waveform peak (absolute value), fundamental wave phase angle, frequency (U1)
	Current	RMS value, fundamental wave value, waveform peak (absolute value), fundamental wave phase angle
	Power	Active power, reactive power, apparent power, power factor, (with lag, lead display) or displacement power factor (with lag, lead display), active energy (consumption, regeneration), reactive energy (lag, lead) Energy cost display (per-kWh price × power consumption)
	Demand	Active power demand value (consumption, regeneration), reactive power demand value (lag, lead), Active power demand quantity (consumption, regeneration), reactive power demand quantity (lag, lead), power factor demand value
	Harmonics	PW3360-21 Only: Harmonic voltage, current, power level, content, phase angle, total harmonic distortion factor (THD-F or THD-R), up to the 40th order
	Pulse input	N / A
Data save interval	1 sec to 30 sec, 1 minute to 60 minutes, 14 selections	
Interfaces	SD/SDHC memory card ² , LAN, USB2.0, FTP	
Operating temperature	0°C to 50°C, 80% RH or less (non-condensating)	-10°C to 50°C, 80% RH or less (non-condensating)
Storage temperature	-10°C to 60°C, 80% RH or less (non-condensating)	-20°C to 60°C, 80% RH or less (non-condensating)
Standards	EN61010 (Safety), EN61326 (EMC)	
Power supply	AC ADAPTER Z1008, BATTERY PACK 9459	AC ADAPTER Z1006, BATTERY PACK 9459
Battery operating time	5 hours	8 hours
Dimensions (W x H x D)	180 x 100 x 68 mm (7.09 x 3.94 x 2.68 in) (with PW9002)	180 x 100 x 67.2 mm (7.09 x 3.94 x 2.65 in) (with PW9002)
Weight	820 g (28.9 oz) (with PW9002)	830 g (29.3 oz) (with PW9002)

SAFETY VOLTAGE SENSOR PW9020 Specifications	
Compatible conductor types	Insulated wires ³ (indoor PVC) or metal parts
Compatible conductor diameters	Finished outer diameter φ6 mm to φ30 mm (φ0.24 in to φ1.18 in)
Effective measurement range	90 V to 520 V
Safety standard category	CAT IV 300 V/CAT III 600 V
Operating temperature	0°C to 50°C, 80% RH or less (non-condensating)
Storage temperature	-10°C to 60°C, 80% RH or less (non-condensating)
Standards	EN61010 (Safety), EN61326 (EMC)
Cord length	3 m (9.84 ft)
Weight	220 g (7.8 oz)

¹ Depends on current sensor in use. For more detailed information on sensors, please refer to p.44, and p.45.
² Use only SD Cards sold by HIOKI. Compatibility and performance are not guaranteed for PC cards made by other manufacturers.
³ Shielded wires cannot be measured. The product may not be able to accurately measure multicore cables or cables that have thick insulation.



PW3360 Accessories

- VOLTAGE CORD L9438-53 (black, red, yellow, blue @ 1 each)
- AC ADAPTER Z1006
- USB cable 0.9 m (2.95 ft)
- Instruction manual, Measurement guide
- Color clips (red, blue, yellow, white @ 2 each)
- Spiral tubes × 5

PW3365 Accessories

- SAFETY VOLTAGE SENSOR PW9020 ×4
- AC ADAPTER Z1008
- USB cable 0.9 m (2.95 ft)
- Instruction manual, Measurement guide
- Color clips (red, blue, yellow, white @ 4 each)
- Spiral tubes × 10

Order code **PW3365-20**

Order code **PW3360-20**

Order code **PW3360-21** with harmonic analysis function

Options

CURRENT SENSOR (For PQ3198, PQ3100, CM7290, CM7291)

Features	Make measurements over extended period of time without zero-adjustment, even in locations with temperature variations			AC/DC current sensors for observing instantaneous waveforms		
Model name	AC/DC AUTO-ZERO CURRENT SENSOR			AC/DC CURRENT SENSOR		
Model	CT7731	CT7736	CT7742	CT7631	CT7636	CT7642
Appearance						
Rated measurement current	100 A AC/DC	600 A AC/DC	2000 A AC/DC	100 A AC/DC	600 A AC/DC	2000 A AC/DC
Max. allowable peak input	150 A peak	900 A peak	2840 A peak	150 A peak	900 A peak	2840 A peak
Bandwidth	DC to 5 kHz (-3dB)	DC to 5 kHz (-3dB)	DC to 5 kHz (-3dB)	DC to 10 kHz (-3dB)	DC to 10 kHz (-3dB)	DC to 10 kHz (-3dB)
Amplitude accuracy (DC, 45 to 66 Hz)	±1.0% rdg ±0.5% f.s.	±2.0% rdg ±0.5% f.s.	±1.5% rdg ±0.5% f.s.	±1.0% rdg ±0.5% f.s.	±2.0% rdg ±0.5% f.s.	±1.5% rdg ±0.5% f.s.
Output rate	1 mV/A	1 mV/A	0.1 mV/A	1 mV/A	1 mV/A	0.1 mV/A
Max. rated voltage to earth	(AC/DC) CAT IV 600 V	(AC/DC) CAT IV 600 V, CAT III 1000 V	(AC/DC) CAT IV 600 V, CAT III 1000 V	(AC/DC) CAT IV 600 V	(AC/DC) CAT IV 600 V, CAT III 1000 V	(AC/DC) CAT IV 600 V, CAT III 1000 V
Operating temperature	-25°C to 65°C	-25°C to 65°C	-25°C to 65°C	-25°C to 65°C	-25°C to 65°C	-25°C to 65°C
Core jaw diameter	φ33 mm or less	φ33 mm or less	φ55 mm or less	φ33 mm or less	φ33 mm or less	φ55 mm or less

Features	Attaches easily to thick cables, even in confined spaces			For accurately measuring load current			For measuring leakage current
Model name	AC FLEXIBLE CURRENT SENSOR			AC CURRENT SENSOR			AC LEAKAGE CURRENT SENSOR
Model	CT7044	CT7045	CT7046	CT7126	CT7131	CT7136	CT7116
Appearance							
Rated measurement current	6000 A AC	6000 A AC	6000 A AC	60 A AC	100 A AC	600 A AC	6 A AC
Max. allowable peak input	15000 A peak	15000 A peak	15000 A peak	100 A peak	200 A peak	900 A peak	30 A peak
Bandwidth	10 to 50 kHz (within ±3 dB)	10 to 50 kHz (within ±3 dB)	10 to 50 kHz (within ±3 dB)	40 to 20 kHz	40 to 20 kHz	40 to 20 kHz	40 to 5 kHz
Amplitude accuracy (45 to 66 Hz)	±1.5% rdg ±0.25% f.s.*	±1.5% rdg ±0.25% f.s.*	±1.5% rdg ±0.25% f.s.*	±0.3% rdg ±0.01% f.s.	±0.3% rdg ±0.02% f.s.	±0.3% rdg ±0.01% f.s.	±1.0% rdg ±0.05% f.s.
Output rate	1 mV/A (600 A) 0.1 mV/A (6000 A)	1 mV/A (600 A) 0.1 mV/A (6000 A)	1 mV/A (600 A) 0.1 mV/A (6000 A)	10 mV/A	1 mV/A	1 mV/A	100 mV/A
Max. rated voltage to earth	(AC) CAT IV 600 V, CAT III 1000 V	(AC) CAT IV 600 V, CAT III 1000 V	(AC) CAT IV 600 V, CAT III 1000 V	(AC) CAT III 300 V	(AC) CAT III 300 V	(AC) CAT IV 600 V, CAT III 1000 V	Insulated conductor
Operating temperature	-25°C to 65°C	-25°C to 65°C	-25°C to 65°C	-10°C to 50°C	-10°C to 50°C	-10°C to 50°C	-25°C to 65°C
Core jaw diameter	φ100 mm or less	φ180 mm or less	φ254 mm or less	φ15 mm or less	φ15 mm or less	φ46 mm or less	φ40 mm or less

CURRENT SENSOR (For PW3365, PW3360)

Features	For load current levels: Voltage output					
Model name	CLAMP ON SENSOR					
Model	9694	9660	9661	9669	9695-02	9695-03
Appearance						
Rated measurement current	5 A AC	100 A AC	500 A AC	1000 A AC	50 A AC	100 A AC
Output rate	10 mV/A	1 mV/A	1 mV/A	0.5 mV/A	10 mV/A	1 mV/A
Amplitude accuracy (45 to 66 Hz)	±0.3% rdg ±0.02% f.s.	±0.3% rdg ±0.02% f.s.	±0.3% rdg ±0.01% f.s.	±1.0% rdg ±0.01% f.s.	±0.3% rdg ±0.02% f.s.	±0.3% rdg ±0.02% f.s.
Max. rated voltage to earth	(AC) CAT III 300 V	(AC) CAT III 300 V	(AC) CAT III 600 V	(AC) CAT III 600 V	(AC) CAT III 300 V	(AC) CAT III 300 V
Operating temperature	0°C to 50°C	0°C to 50°C	0°C to 50°C	0°C to 50°C	0°C to 50°C	0°C to 50°C
Core jaw diameter	φ15 mm or less	φ15 mm or less	φ46 mm or less	φ55 mm or less 80x20 mm busbar	φ15 mm or less	φ15 mm or less

Features	For load current levels: Voltage output			For leak current: Voltage output	
Model name	AC FLEXIBLE CURRENT SENSOR			CLAMP ON LEAK SENSOR	
Model	CT9667-01	CT9667-02	CT9667-03	9657-10	9675
Appearance					
Rated measurement current	5000 A AC/500 A AC	5000 A AC/500 A AC	5000 A AC/500 A AC	10 A AC	10 A AC
Output rate	0.1 mV/A (5000 A) 1 mV/A (500 A)	0.1 mV/A (5000 A) 1 mV/A (500 A)	0.1 mV/A (5000 A) 1 mV/A (500 A)	100 mV/A	100 mV/A
Amplitude accuracy (45 to 66 Hz)	±2% rdg ±0.3% f.s.*	±2% rdg ±0.3% f.s.*	±2% rdg ±0.3% f.s.*	±1.0% rdg ±0.05% f.s.	±1.0% rdg ±0.005% f.s.
Max. rated voltage to earth	(AC) CAT IV 600 V (AC) CAT III 1000 V	(AC) CAT IV 600 V (AC) CAT III 1000 V	(AC) CAT IV 600 V (AC) CAT III 1000 V	Insulated conductor	Insulated conductor
Operating temperature	-25°C to 65°C	-25°C to 65°C	-10°C to 50°C	0°C to 50°C	0°C to 50°C
Core jaw diameter	φ100 mm or less	φ180 mm or less	φ254 mm or less	φ40 mm or less	φ30 mm or less

*At center of flexible loop

1	EXTENSION CABLE L0220-01	2 m (6.56 ft), for PL14 connectors
2	EXTENSION CABLE L0220-02	5 m (16.4 ft), for PL14 connectors
3	EXTENSION CABLE L0220-03	10 m (32.81 ft), for PL14 connectors
4	EXTENSION CABLE L0220-04	20 m (65.62 ft), for PL14 connectors
5	EXTENSION CABLE L0220-05	30 m (98.43 ft), for PL14 connectors
6	EXTENSION CABLE L0220-06	50 m (164.04 ft), for PL14 connectors
7	EXTENSION CABLE L0220-07	100 m (328.08 ft), for PL14 connectors
8	CONNECTION CABLE 9219	For 9695, 3 m (9.84 ft)
9	AC ADAPTER 9445-02	For CT9667
10	CONVERSION CABLE L9910	To convert output connector: BNC to PL 14



Clamp

Insulation

DMMS

Detectors

Earth

Power quality

Power consumption

Battery

PV

Logger

LAN

Signal

Lux

Temperature

Sound

PQ3198, PQ3100			
Voltage	1	VOLTAGE CORD L1000	Red/ Yellow/ Blue/Gray @ 1 each, Black x 4, 3 m (9.84 ft), Alligator clip x 8
	2	VOLTAGE CORD L1000-05	Red/ Yellow/ Blue/Gray/Black @ 1 each 1, 3 m (9.84 ft), Alligator clip x 5
	3	MAGNETIC ADAPTER 9804-01	Red, Alternative tip for the L1000, L1000-05
	4	MAGNETIC ADAPTER 9804-02	Black, Alternative tip for the L1000, L1000-05
	5	GRABBER CLIP L9243	Alternative tip for the L1000, L1000-05
	6	PATCH CORD L1021-01*	0.5 m (1.64 ft), Red, Banana branch-banana
	7	PATCH CORD L1021-02*	0.5 m (1.64 ft), Black, Banana branch-banana
Record	8	SD MEMORY CARD 2GB Z4001	Use only SD Cards sold by HIOKI. Compatibility and performance are not guaranteed for PC cards made by other manufacturers.
	9	SD MEMORY CARD 8GB Z4003	
Communication	10	RS-232C CABLE 9637	For PQ3100, pin - 9 pin, cross, 1.8 m (5.91 ft)
	11	LAN CABLE 9642	5 m (16.4 ft), Straight, Cross conversion adapter
Power supply	12	AC ADAPTER Z1002	100 V AC to 240 V AC
	13	BATTERY PACK Z1003	7.2 V, Ni-MH
Connection	14	WIRING ADAPTER PW9000	For PQ3198, for 3-phase/3-wire connection
	15	WIRING ADAPTER PW9001	For PQ3198, for 3-phase/4-wire connection
Other	16	GPS BOX PW9005	For PQ3198
	17	CARRYING CASE C1009	Bag type
	18	CARRYING CASE C1001	Soft type
	19	CARRYING CASE C1002	Hard trunk type
	20	MAGNETIC STRAP Z5004	
	21	MAGNETIC STRAP Z5020	Extra strength

* Only for PQ3198



PW3365, PW3360			
Voltage	1	SAFETY VOLTAGE SENSOR PW9020	For PW3365, 3 m (9.84 ft)
	2	VOLTAGE CORD L9438-53	For PW3360, Black/ Red/ Yellow/ Blue, 3 m (9.84 ft) length, Alligator clip x 4
	3	MAGNETIC ADAPTER 9804-01	For PW3360, Red, $\Phi 11$ mm (0.43 in)
	4	MAGNETIC ADAPTER 9804-02	For PW3360, Black, $\Phi 11$ mm (0.43 in)
	5	PATCH CORD L1021-01	For PW3360, 0.5 m (1.64 ft), Red, Banana branch-banana
	6	PATCH CORD L1021-02	For PW3360, 0.5 m (1.64 ft), Black, Banana branch-banana
Record	7	SD MEMORY CARD 2GB Z4001	Use only SD Cards sold by HIOKI. Compatibility and performance are not guaranteed for PC cards made by other manufacturers.
	8	SD MEMORY CARD 8GB Z4003	
Communication	9	LAN CABLE 9642	5 m (16.4 ft), Straight, Cross conversion adapter
	10	POWER LOGGER VIEWER SF1001	Software to analyze measurement data
Power supply	11	AC ADAPTER Z1008	For PW3365, 100V AC to 240V
	12	AC ADAPTER Z1006	For PW3360, 100V AC to 240V
	13	BATTERY SET PW9002	Battery case and 9459 Set
Other	14	BATTERY PACK 9459	
	15	CARRYING CASE C1005	
	16	CARRYING CASE C1008	For PW3365
	17	MAGNETIC STRAP Z5004	



CM7290, CM7291			
Output	1	OUTPUT CORD L9094	Connect to Banana terminal, 1.5 m (4.92 ft)
	2	OUTPUT CORD L9095	Connect to BNC terminal, 1.5 m (4.92 ft)
	3	OUTPUT CORD L9096	Connect to terminal block, 1.5 m (4.92 ft)
Power supply	4	AC ADAPTER 9445-02	
	5	CARRYING CASE C0220	
Other	6	CARRYING CASE C0221	
	7	MAGNETIC STRAP Z5004	



DISPLAY UNIT CM7290, CM7291


CE
Product warranty for 3 years
Accuracy guaranteed for 3 years

Measurement sensors sold separately



CM7290

CM7291



- Built-in Bluetooth® wireless technology
- Verify and record measured data with free GENNECT Cross mobile app
- *Available only with products displayed with the GENNECT Cross icon

Bluetooth®

Please see www.hioki.com for list of supported regions.

GENNECT Cross

Accessories

- Alkaline battery LR6 x 2
- Instruction manual
- Protector

Order code **CM7290**

Order code **CM7291**

Measurement parameters	DC, AC, DC+AC, Hz			
Measurement parameters	WAVE	 Input signal Output signal		
	RMS	 Convert and output as RMS value		
	PEAK	 Output peak of each interval as absolute value		
	FREQ	 Output frequency count per interval		
Accuracy (output)	Sensor	CT7731 CT7631	CT7736 CT7636	CT7742 CT7642
	DC WAVE	$\pm 1.5\%$ rdg ± 1.3 mV	$\pm 2.5\%$ rdg ± 3.8 mV	$\pm 2.0\%$ rdg ± 1.8 mV
	AC WAVE	$\pm 1.5\%$ rdg ± 1.3 mV	$\pm 2.5\%$ rdg ± 3.8 mV	$\pm 2.0\%$ rdg ± 2.3 mV
Other	AC RMS	$\pm 1.8\%$ rdg ± 1.3 mV	$\pm 2.8\%$ rdg ± 3.8 mV	$\pm 2.8\%$ rdg ± 1.8 mV
	Output update time	PEAK: 0.02s (FAST)/0.2s (NORMAL)/1s (SLOW) FREQ: 0.2s (FAST)/0.2s (NORMAL)/3s (SLOW) (WAVE, RMS: analog output)		
	Operating temperature	-25°C to 65°C, 80% RH or less (non-condensating)		
Other	Storage temperature	-25°C to 65°C, 80% RH or less (non-condensating)		
	Dustproof and waterproof	IP54 ¹⁾		
	Standards	EN61010 (Safety), EN61326 (EMC)		
	Power supply	Alkaline battery LR6 x 2, external power supply		
Other	Continuous operating time	16 hours (backlight OFF)		
	Dimensions (W x H x D)	52 x 163 x 37 mm (2.05 x 6.42 x 1.46 in)		
	Weight	220 g (7.8 oz)		

¹⁾ With sensor connected and caps fitted to AC adapter and power connector

Clamp

Insulation

DMMS

Detectors

Earth

Power quality

Power consumption

Battery

PV

Logger

LAN

Signal

Lux


Temperature

Sound

BATTERY TESTER BT3554-50, BT3554-51, BT3554-52

Properly diagnose deterioration of UPS lead-acid batteries even under noisy environments

Tough against inverter noise during UPS startup

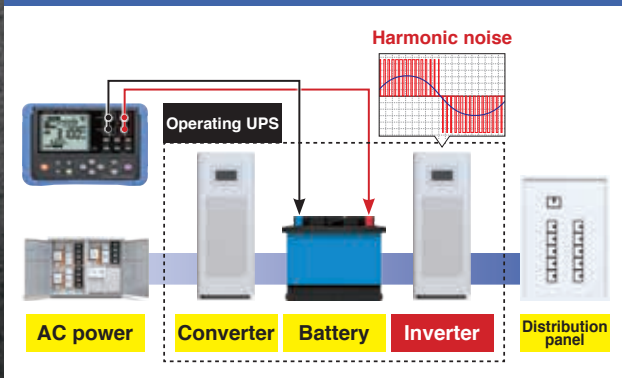

Completing an intensive inspection workload efficiently

The app provides audio guidance about the battery measurement sequence. And, automatically saves the measurement results.

The app interface on a smartphone shows a 'Measurement Record' for 'Battery No. 1' with a 'No.1 PASS' result. A 'Guide Stop' button is visible at the bottom of the screen.

1 2 3 4 5 ... 500

Z3210

NEXT: Battery No.1
Receive measurement results
No.1 PASS

BATTERY TESTERS



BATTERY TESTER BT3554-50, BT3554-51, BT3554-52

Product warranty for 3 years
Accuracy guaranteed for 1 year



WIRELESS ADAPTER Z3210 (Options): Attach to enable Bluetooth® wireless technology



BT3554-50: Instrument only

With Z3210



Please see www.hioki.com for list of supported regions.



BT3554-51: with 9465-10

With Z3210



Please see www.hioki.com for list of supported regions.



BT3554-52: with L2020

With Z3210



Please see www.hioki.com for list of supported regions.



Accessories


- PIN TYPE LEAD 9465-10 (BT3554-51 only)
- PIN TYPE LEAD L2020 (BT3554-51 only)
- Carrying Case C1014
- Protector Z5041
- Fuse Set Z5050
- ZERO ADJUSTMENT BOARD
- Neck strap
- USB cable
- GENNECT One Software CD
- Power-on option sticker
- Alkaline battery LR6 x 8
- Instruction manual

Order code	BT3554-50	Instrument only
Order code	BT3554-51	With 9465-10
Order code	BT3554-52	With L2020
Order code	BT3554-91	With 9465-10, Z3210
Order code	BT3554-92	With L2020, Z3210
Order code	Z3210	

Options	
1	PIN TYPE LEAD L2020
2	PIN TYPE LEAD 9465-10
3	PIN TYPE LEAD 9772
4	CLIP TYPE LEAD WITH TEMPERATURE SENSOR 9460
5	LARGE CLIP TYPE LEAD 9467
6	TIP PIN 9465-90
7	TIP PIN 9772-90
8	REMOTE CONTROL SWITCH 9466
9	TEMPERATURE PROBE 9451
10	TEMPERATURE PROBE 9451-01
11	0 ADJ BOARD Z5038
12	FUSE SET Z5050
13	PROTECTOR Z5041
14	CARRYING CASE C1014

Measurement parameters	Internal resistance measurement for batteries (AC four-terminal method) Terminal voltage measurement for batteries (DC voltage) Temperature measurement (when using the 9460)	
Measurement	Resistance	3 mΩ (Max. display: 3.100 mΩ, Resolution: 1 μΩ) 30 mΩ (31.00 mΩ, 10 μΩ) 300 mΩ (310.0 mΩ, 100 μΩ) 3 Ω (3.100 Ω, 1 mΩ) Accuracy: ±0.8% rdg ±6 dgt
	Measurement Current	160 mA (3 mΩ, 30 mΩ range) 16 mA (300 mΩ range) 1.6 mA (3 Ω range)
	Measurement frequency	1 kHz ±30 Hz (with function for avoiding noise frequency enabled: 1 kHz ±80 Hz)
Voltage	6.000 V/60.00 V Accuracy: ±0.08% rdg ±6 dgt	
Temperature	-10.0°C to 60.0°C Accuracy: ±1.0°C	
Other	Function	<ul style="list-style-type: none"> • Memory function (Up to 6000 data) • Auto memory function • Auto-hold function • Measurement Navigator (When using Z3210, GENNECT Cross: Voice guide output) • Tablet app (GENNECT Cross) • PC app (GENNECT One) • Comparator function (PASS/ WARNING/ FAIL) • Excel™ Direct Input function (When using Z3210)
	Interfaces	USB2.0
Operating temperature	0°C to 40°C, 80% RH or less (non-condensating)	
Storage temperature	-10°C to 50°C, 80% RH or less (non-condensating)	
Standards	EN61010 (Safety), EN61326 (EMC)	
Power supply	LR6 alkaline battery x 8	
Continuous operating time	8.5 hours	
Dimensions (W x H x D)	199 x 132 x 60.6 mm (7.83 x 5.20 x 2.39 in)	
Weight	960 g (33.8 oz)	


The thresholds for determining the pass/fail condition of a battery depend on the specifications and standards of the battery manufacturer, battery type, capacity, etc. It is important and necessary to always conduct battery testing against the internal resistance and terminal voltage of a new or reference battery. In some cases, it may be difficult to determine the deterioration state of traditional open type (liquid) lead-acid or alkaline batteries, which demonstrate smaller changes in internal resistance than sealed lead acid batteries.

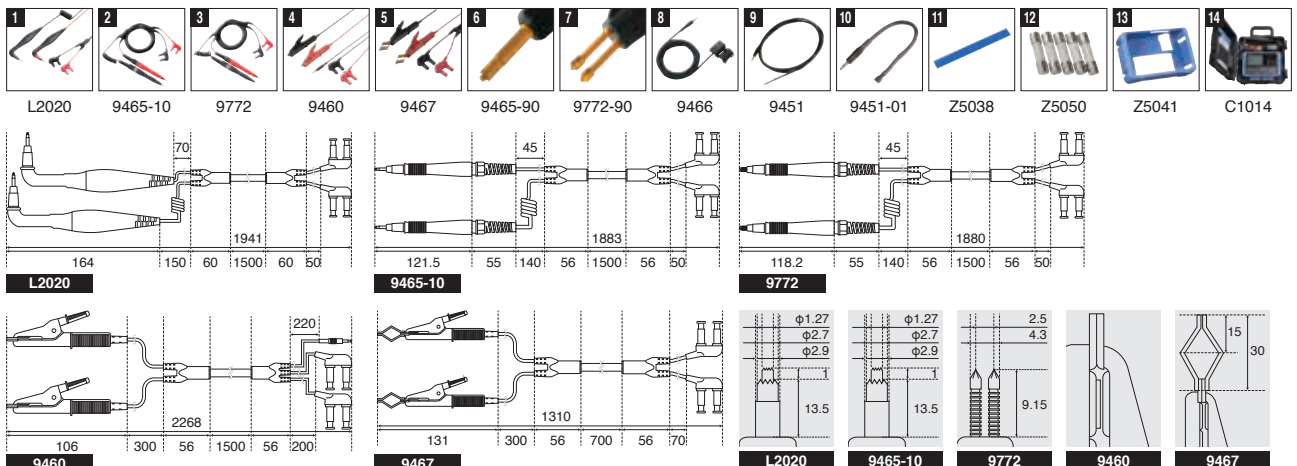

PV Maintenance


Inspect solar panel bypass diodes for opens and shorts

Improve testing efficiency by first inspecting the PV string, then testing individual modules for issues

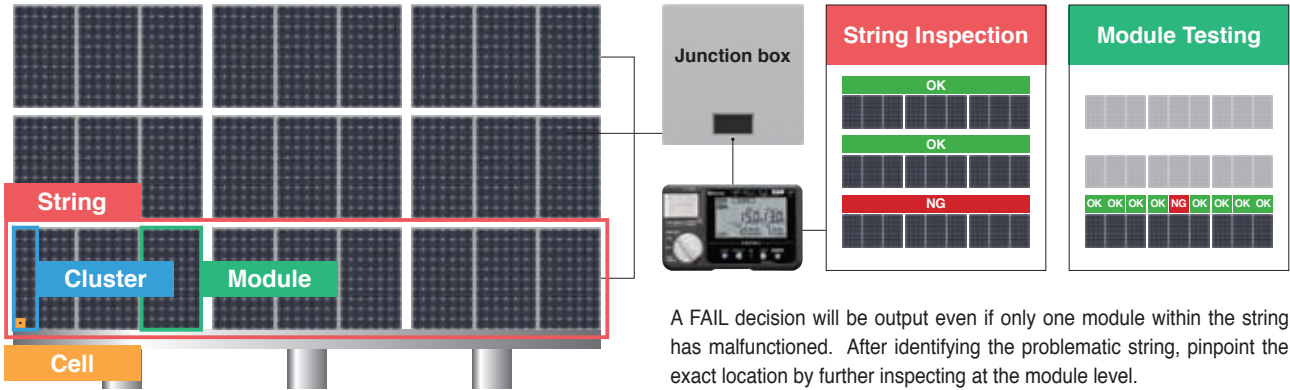


A FAIL decision will be output even if only one module within the string has malfunctioned. After identifying the problematic string, pinpoint the exact location by further inspecting at the module level.

- 1 RBPR: Bypass route resistance
- 2 Voc: Open-circuit voltage
- 3 Isc + α1: Measurement current
- 4 Isc: Short-circuit current




Normal reading



Open fault

Test open-circuit voltage, short-circuit current, and bypass route resistance at the same time

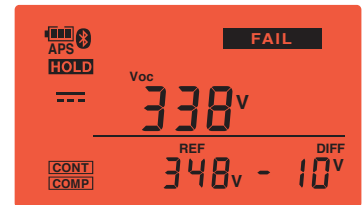

Short-circuit fault

Measure open-circuit voltage within 1 second and compare to reference value

BYPASS DIODE TESTER FT4310



Product warranty for 3 years
Accuracy guaranteed for 1 year



Please see www.hioki.com for list of supported regions.



Order code **FT4310**

Accessories




- TEST LEAD SET WITH REMOTE SWITCH L9788-11
- CARRYING CASE C0206
- Instruction manual
- Alkaline battery LR6 x6

L9788-11 C0206

Options

1	TEST LEAD SET WITH REMOTE SWITCH L9788-11	1.2 m (3.94 ft)
2	TEST LEAD WITH REMOTE SWITCH L9788-10	1.2 m (3.94 ft)
3	TIP PIN L9788-90	For L9788, L9788-10
4	BREAKER PIN L9788-92	For checking breaker terminal
5	CARRYING CASE C0206	



L9788-11 L9788-10 L9788-90 L9788-92 C0206

*For detailed information about L9788, please refer to p.27

BPD TEST mode (Bypass diode)	
Measurement items	Bypass diode comparator judgment Bypass route resistor Open-circuit voltage Short-circuit current Measurement (applied) current
Measurement object	Crystal system string Open-circuit voltage: 1000 V DC or less Rated current: 2 A to 12 A DC
Measurement method	Short-circuit and pulse voltage application
Duration of shorting between terminals	10 ms or less
Output pulse	Voltage: 100 V DC or less, Pulse width: 5 ms or less Limiting current: Measured short-circuit current + 1 A or less, Maximum: 13 A
Voc mode (Open-circuit voltage)	
Measurement items	Open-circuit voltage
Measurement range	0 V to 1000 V DC (displayed up to 1200 V DC)
Response time	Within 1 sec.
Functions	Displays the number of bypass diode measurements Automatic polarity judgment function Comparison display Live circuit indicator Comparator Auto hold Backlight Auto power off Buzzer sounds Battery indicator
Operating temperature	-10 to 65°C, 80% RH or less (non-condensating)
Storage temperature	-20 to 65°C, 80% RH or less (non-condensating)
Dustproof and waterproof	IP40 (EN60529)
Standards	EN61010 (Safety), EN61326 ClassA (EMC)
Maximum input voltage	1000 V DC
Power supply	LR6 alkaline battery x 6
Continuous operating time	45 hours (Bluetooth® OFF)
Dimensions (W x H x D)	152 x 92 x 69 mm (5.98 x 3.62 x 2.72 in), Cable length 0.5m (1.64 ft)
Weight	650 g (22.9 oz)

LOGGERS

Measure with remote modules and collect data with central logging station

Send data to the LR8410 via Bluetooth® wireless communication

Measurement units



Main unit



Model	LR8510	LR8511	LR8512	LR8513	LR8514	LR8515
No. of input channels	15	15	2	2	2	2
Input type	Voltage	✓	✓			✓
	Temperature	✓	✓			✓
	Humidity		✓			✓
	Resistance		✓			
	Pulse			✓		
	Current				✓	



Sensor cable to main unit is eliminated. Shorter thermocouple cable lengths are less susceptible to noise, reducing effects on the measurement data. Complete wiring quickly and efficiently.



WIRELESS LOGGING STATION LR8410-20

Product warranty for 3 years
Accuracy guaranteed for 1 year

For more details about the LR85XX Series, please refer to p.51.



- Order code **LR8410-20**
- Order code **LR8510**
- Order code **LR8511**

LR8410-20 Accessories

- SD MEMORY CARD 2GB Z4001
- USB cable
- AC ADAPTER Z1008 (also bundled with the LR8510, LR8511)
- CD-R (data collection software "Logger Utility")
- Instruction manual
- Measurement guide



Options	
1	AC ADAPTER Z1008 100 V to 240 V AC
2	SD MEMORY CARD 2GB Z4001
3	SD MEMORY CARD 8GB Z4003
4	BATTERY PACK Z1007
5	CARRYING CASE C1007
6	FIXED STAND Z1009
7	LAN CABLE 9642 5 m (16.4 ft), with straight-to-cross conversion adapter



LR8410-20

No. of measurement channels	Connect up to seven units wirelessly* (Units: LR8510, LR8511, LR8512, LR8513, LR8514, LR8515)
Pulse, digital input	2 pulse input channels 2 digital input channels (when using the LR8512)
Recording intervals	100 ms ² , 200 ms to 1 hour, 16 selections
Data storage	Internal memory: 8M-words; Data storage media: SD memory card or USB memory stick ³
Interfaces	LAN: 100BASE-TX, USB: USB 2.0 series mini-B receptacle
Functions	Save waveform data in real time to the SD memory card or USB memory stick, numerical value calculations, waveform calculations, 4ch alarm output (not isolated, common ground), and other functions
Operating temperature	-10 to 50°C, 80% rh or less (non-condensating)
Storage temperature	-20 to 60°C, 80% rh or less (non-condensating)
Standards	EN61010 (Safety), EN61326 classA, EN61000-3-2, EN61000-3-3 (EMC)
Power supply	AC ADAPTER Z1008 (100 to 240 V AC, 50/60 Hz)
Dimensions (W x H x D)	230 x 125 x 36 (9.06 x 4.92 x 1.42 in)
Weight	700 g (24.7 oz) (excluding battery pack)

LR8510

Log	Voltage, thermocouple
Channels	15ch (M3 screw type terminal block, 2 terminals per channel)
Measurement range	Voltage: -10 mV to 100 V, Thermocouple: -200°C to 1800°C ⁴
Accuracy	Voltage: ±10 μV, Thermocouple: ±0.6°C

LR8511

Log	Voltage, thermocouple, RTDs, resistance, humidity
Channels	15ch (Push-button terminals, 4 terminals per channel)
Measurement range	Voltage: -10 mV to 100 V, Thermocouple: -200 to 1800°C ⁴ RTDs: -100 to 500°C ⁴ , Resistance: 0 to 200 Ω, Humidity: 5.0 to 95.0% rh
Accuracy	Voltage: ±10 μV, Thermocouple: ±0.6°C RTDs: ±0.6°C, Resistance: ±10 mΩ, Humidity: ±5% rh


* Using Bluetooth® wireless technology
² Setting not available when the thermocouple burnout detection setting is ON
³ Only data recorded to a genuine HIOKI SD memory card is guaranteed
⁴ Depends on current sensor in use

Note: The LR8410-20 alone is not capable of making measurements. One or more input modules are necessary to measure. The main unit and input modules are not bundled with the Battery Pack Z1007 (Li-ion). Thermocouples are not provided by HIOKI, and must be purchased from a separate vendor. Use only HIOKI SD memory cards, which are manufactured to strict industrial standards, for long-term storage of important data. Correct operation of non-HIOKI SD cards or USB memory sticks is not guaranteed.

These products emit radio waves. Use of radio waves is subject to licensing requirements in certain countries. Use in countries or regions other than those listed above may constitute a violation of law, exposing the operator to legal penalties.

Collect data with portable transfer devices

Use the LR5091 or LR5092 to capture data and upload to the PC for analysis

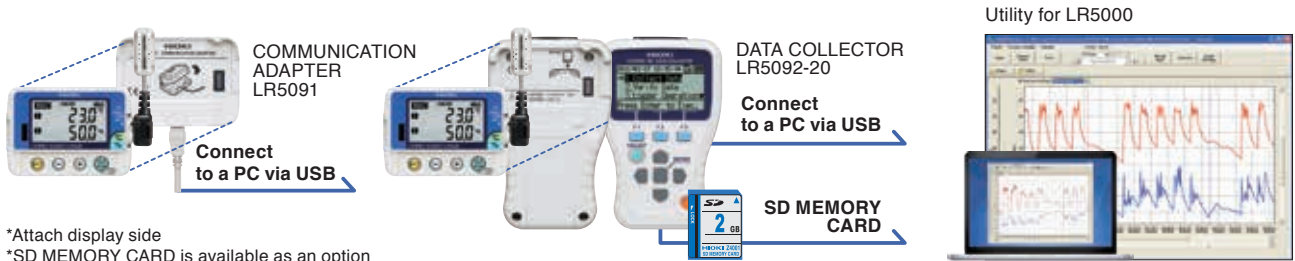

*Attach display side
*SD MEMORY CARD is available as an option

Model	HUMIDITY LOGGER LR5001	TEMPERATURE LOGGER LR5011	INSTRUMENTATION LOGGER LR5031	CLAMP LOGGER LR5051
Log	Temperature, Humidity	Temperature	4-20 mA Instrumentation Signals	Load Current, Leak Current
Appearance				
Channels	1ch (temperature), 1ch (humidity)	1ch	1ch	2ch
Measurement range	-40.0°C to 85.0°C (temperature) 0% RH to 100% RH (humidity)	-40.0°C to 180.0°C ¹	-30.00 mA to 30.00 mA	0.00 A to 1000 A AC ¹
Accuracy	±0.5°C (temperature) ±5% RH (humidity)	±0.5°C	±0.5% rdg ±5 dgt	±0.5% rdg ±5 dgt
Bundled sensor	HUMIDITY SENSOR LR9504	Sensor sold separately	CONNECTION CABLE LR9801	Sensor sold separately

Model	VOLTAGE LOGGER LR5041	VOLTAGE LOGGER LR5042	VOLTAGE LOGGER LR5043
Log	Instrumentation signals, Analog outputs		
Appearance			
Channels	1ch	1ch	1ch
Measurement range	-50.00 mV to 50.00 mV	-5.000 V to 5.000 V	-50.00 V to 50.00 V
Accuracy	±0.5% rdg ±5 dgt	±0.5% rdg ±5 dgt	±0.5% rdg ±5 dgt
Bundled sensor	CONNECTION CABLE LR9802	CONNECTION CABLE LR9802	CONNECTION CABLE LR9802

LR5091 or LR5092-20 is necessary to transfer data from a LR5000 series logger to a PC



COMMUNICATION ADAPTER LR5091 (USB cable bundled)



DATA COLLECTOR LR5092-20 (USB cable bundled)

¹ Depends on current sensor in use

LR50XX Series Shared Specifications

Measurement	Recording intervals	1/2/5/10/15/20/30 sec. /1/2/5/10/15/20/30/60 min.
Recording modes	Instantaneous value, MAX/MIN/AVG	
Storage capacity	60,000 data sets per channel (instantaneous value)	
Operating temperature	LR5001, LR5011, LR5031, LR5041, LR5042, LR5043: -20°C to 70°C, 80% RH or less LR5051: 0°C to 50°C, 80% RH or less	
Power supply	LR6 alkaline battery x1 LR5051: LR6 alkaline battery x2	
Continuous operating time	LR5001: 3 months (1min. recording interval), 20 days (1sec.) LR5011: 2 years (1min. recording interval), 2 months (1sec.) LR5051: 1 years (1min. recording interval), 1 month (1sec.) LR5031, LR5041, LR5042, LR5043: 2 years (1min. recording interval), 2 months (1sec.)	
Dimensions (W x H x D)	79 x 57 x 28 mm (3.11 x 2.24 x 1.10 in) LR5051: 79 x 70 x 37 mm (3.11 x 2.76 x 1.46 in)	
Weight	105 g (3.7 oz), LR5051: 165 g (5.8 oz)	

- Order code **LR5001** HUMIDITY SENSOR LR9504, Kickstand
- Order code **LR5011** Kickstand
- Order code **LR5031** CONNECTION CABLE LR9801, Kickstand
- Order code **LR5041** CONNECTION CABLE LR9802, Kickstand
- Order code **LR5042** CONNECTION CABLE LR9802, Kickstand
- Order code **LR5043** CONNECTION CABLE LR9802, Kickstand
- Order code **LR5051**

LR50XX Series Shared Accessories

- LR6 alkaline battery x 1 (LR5051: LR6 alkaline battery x 2)
- Instruction manual, Operation guide



Product warranty for 3 years
Accuracy guaranteed for 1 year

Make logger settings and transfer data via Bluetooth® wireless communication

Use your tablet or PC to download data and configure measurement conditions



Model	WIRELESS PULSE LOGGER LR8512	WIRELESS CLAMP LOGGER LR8513	WIRELESS HUMIDITY LOGGER LR8514	WIRELESS VOLTAGE/TEMP LOGGER LR8515	WIRELESS FUNGAL LOGGER LR8520
Log	Pulse	Load Current, Leak Current	Temperature, Humidity	DCV, Temperature	Fungal Growth
Appearance					
Channels	2ch	2ch	2ch (temperature), 2ch (humidity)	2ch	1ch (temperature), 1ch (humidity)
Measurement range	Pulse: 0 to 1000m pulse No. of revolutions: 0 to 5000n ¹ [r/s]	500.0 mA to 5000 A AC ² 10.00 A to 2000 A DC ²	-40.0°C to 80.0°C (temperature) 0.0% rh to 100% RH (humidity)	Voltage: -50 V to 50 V Thermocouple (K): -200°C to 999.9°C Thermocouple (T): -200°C to 400°C	Temperature: -40°C to 80°C Humidity: 0% RH to 100% RH (Calculates fungal index ³ from temperature and humidity)
Accuracy	-	±0.5 % rdg ±5 dgt	Temperature: ±0.5°C Humidity: ±3% RH ³	Voltage: ±0.05 mV Thermocouple: ±0.6°C	Thermocouple: ±0.5°C Humidity: ±3% RH ³
Bundled sensor	CONNECTION CABLE L1010	Sensor sold separately	Sensor sold separately	Sensor sold separately	Sensor sold separately

¹n is the number of pulses, 1 to 1000, per revolution. ²Depends on current sensor in use ³Hysteresis: ±1% rh (added to the humidity measurement accuracy).
*This index, which predicts how easy it is for fungi to grow, was proposed by the late Keiko Abe, Doctor of Agriculture. Because fungal growth has a direct correlation with temperature and relative humidity, expected occurrence can be predicted.

LR85XX Series Shared Specifications

Measurement	Recording intervals	0.1 ¹ /0.2 ¹ /0.5/1/2/5/10/20/30 sec./1 min./2/5/10/20/30/1h
	Recording modes	Instantaneous value, MAX/MIN/AVG (LR8513 only)
	Communication reaches	30 m, line of sight
	Storage capacity	500,000 data sets per channel
Other	Operating temperature	-20°C to 60°C, 80% RH or less
	Power supply	LR6 alkaline battery × 2 AC ADAPTER Z2003 (option, DC12V)
	Continuous operating time ²	LR8512: 2 months (1min. recording interval), 2 months (1sec.) LR8513: 3 months (1min. recording interval), 1 month (1sec.) LR8514: 35 months (1min. recording interval), 3 months (1sec.) LR8515: 25 months (1min. recording interval), 10 days (1sec.) LR8520: 35 months (1min. recording interval), 3 months (1sec.)
Dimensions (W × H × D)	LR8512, LR8514, LR8520: 85 × 61 × 31 mm (3.35 × 2.40 × 1.22 in) LR8513, LR8515: 85 × 75 × 38 mm (3.35 × 2.95 × 1.50 in)	
Weight	LR8512, LR8514, LR8520: 95 g (3.4 oz), LR8513: 130 g (4.6 oz), LR8515: 126 g (4.4 oz)	

¹LR8512, LR8515 only ²With Bluetooth® communication OFF

Order code **LR8512** CONNECTION CABLE L1010 × 2

Order code **LR8513** -

Order code **LR8514** -

Order code **LR8515** -

Order code **LR8520** CONNECTION CABLE L1010 × 1

LR85XX Series Shared Accessories

- LR6 alkaline battery × 2
- CD-R, Measurement Guide, Caution for Using Radio Waves (CD-R: Instruction Manual PDF, Logger Utility, Wireless Logger Collector)

Wireless Logger Collector (for collecting measurement data)	
Supported devices	Android tablet/Android smartphone Windows PC/Windows tablet
OS	Android OS 4.0.3 or later Windows 10/8/7 (32/64bit)
Number of available registrations	Max. 100 units
Output format	Logger Utility format LR5000 format Smart Site compatible format CSV format Text format

How to obtain software

For Windows PC: Supplied CD-R/Download from the HIOKI website
For Android tablet: Google Play™

Use Logger Utility to view data acquired by the Wireless Logger Collector

Logger Utility

- Display waveform
- Analyze measurement data

Clamp
Insulation
DIMMS
Detectors
Earth

Power quality
Power consumption

Battery

PV

Logger

LAN

Signal

Lux

Temperature

Sound

Options



HUMIDITY LOGGER LR5001		
1	HUMIDITY SENSOR LR9501	1 m (3.28 ft)
2	HUMIDITY SENSOR LR9502	5 m (16.4 ft)
3	HUMIDITY SENSOR LR9503	10 m (32.81 ft)
4	HUMIDITY SENSOR LR9504	4 cm (1.57 in)
TEMPERATURE LOGGER LR5011		
5	TEMPERATURE SENSOR LR9601	Molded plastic type, 1 m (3.28 ft)
6	TEMPERATURE SENSOR LR9602	Molded plastic type, 5 m (16.4 ft)
7	TEMPERATURE SENSOR LR9603	Molded plastic type, 10 m (32.81 ft)
8	TEMPERATURE SENSOR LR9604	Molded plastic type, 4.5 cm (1.77 in)
9	TEMPERATURE SENSOR LR9611	Lug type, 1 m (3.28 ft)
10	TEMPERATURE SENSOR LR9612	Lug type, 5 m (16.4 ft)
11	TEMPERATURE SENSOR LR9613	Lug type, 10 m (32.81 ft)
12	TEMPERATURE SENSOR LR9621	Sheathed type, 1 m (3.28 ft)
13	TEMPERATURE SENSOR LR9631	Needle type, 1 m (3.28 ft)
INSTRUMENTATION LOGGER LR5031		
14	CONNECTION CABLE LR9801	1 m (3.28 ft), 2 wires
VOLTAGE LOGGER LR5041, LR5042, LR5043, PULSE LOGGER LR5061		
15	CONNECTION CABLE LR9802	1 m (3.28 ft), 4 wires
LR50XX Series		
16	WALL-MOUNTED HOLDER LR9901	Cannot be used with LR5051
17	MAGNETIC STRAP Z5004	
DATA COLLECTOR LR5092		
18	SD MEMORY CARD 2GB Z4001	Use only SD Cards sold by HIOKI. Compatibility and performance are not guaranteed for PC cards made by other manufacturers.



WIRELESS PULSE LOGGER LR8512, WIRELESS FUNGAL LOGGER LR8520		
1	CONNECTION CABLE L1010	1.5 m (4.92 ft)
WIRELESS HUMIDITY LOGGER LR8514, WIRELESS FUNGAL LOGGER LR8520		
2	HUMIDITY SENSOR Z2010	50 mm (1.97 in)
3	HUMIDITY SENSOR Z2011	1.5 m (4.92 ft)
LR85XX Series		
4	AC ADAPTER Z2003	100 V to 240 V AC
5	MAGNETIC STRAP Z5004	
6	MAGNETIC STRAP Z5020	Extra strength



¹ At center of flexible loop
² Maximum measurable current when used with the LR8513, LR5051

CURRENT SENSORS (For LR8513, LR5051)						
Measurement application	For load current levels: Voltage output					
Model name	CLAMP ON SENSOR			AC FLEXIBLE CURRENT SENSOR		
Model	9669	9695-02	CT6500	CT9667-01	CT9667-02	CT9667-03
Appearance		 Requires the 9219 Not CE marked				
Rated measurement current	1000 A AC	50 A AC	500 A AC	5000 A AC/500 A AC	5000 A AC/500 A AC	5000 A AC/500 A AC
Output rate	0.5 mV/A	10 mV/A	1 mV/A AC	0.1 mV/A (5000 A) 1 mV/A (500 A)	0.1 mV/A (5000 A) 1 mV/A (500 A)	0.1 mV/A (5000 A) 1 mV/A (500 A)
Amplitude accuracy (DC, 45 to 66 Hz)	±1.0% rdg ±0.01%f.s.	±0.3% rdg ±0.02% f.s.	±1.5% rdg ±0.03% f.s.	±2% rdg ±0.3% f.s. ¹	±2% rdg ±0.3% f.s. ¹	±2% rdg ±0.3% f.s. ¹
Max. rated voltage to earth	CAT III 600 V	CAT III 300 V	CAT III 600 V	CAT IV 600 V CAT III 1000 V	CAT IV 600 V CAT III 1000 V	CAT IV 600 V CAT III 100 V
Operating temperature	0°C to 50°C	0°C to 50°C	0°C to 50°C	-25°C to 65°C	-25°C to 65°C	-10°C to 50°C
Core jaw diameter	φ55 mm or less 80 × 20 mm busbar	φ15 mm or less	φ46 mm or less	φ100 mm or less	φ180 mm or less	φ254 mm or less

Measurement application	For leak current: Voltage output	
Model name	CLAMP ON LEAK SENSOR	
Model	9657-10	9675
Appearance		
Rated measurement current	5 A AC ²	5 A AC ²
Output rate	100 mV/A	100 mV/A
Amplitude accuracy (DC, 45 to 66 Hz)	±1.0% rdg ±0.05% f.s.	±1.0% rdg ±0.005% f.s.
Max. rated voltage to earth	Insulated conductor	Insulated conductor
Operating temperature	0°C to 50°C	0°C to 50°C
Core jaw diameter	φ40 mm or less	φ30 mm or less

For CLAMP ON SENSOR 9695-02
 CONNECTION CABLE 9219 For 9695, 3 m (9.84 ft)

The following sensors can be used with Model LR8513 via the DISPLAY UNIT CM7290 or CM7291 (requires OUTPUT CORD L9095)

AC/DC CURRENT SENSOR CT7631	φ33 mm, 100 A
AC/DC CURRENT SENSOR CT7636	φ33 mm, 200 A*
AC/DC CURRENT SENSOR CT7642	φ55 mm, 2000 A
AC/DC AUTO-ZERO CURRENT SENSOR CT7731	φ33 mm, 100 A
AC/DC AUTO-ZERO CURRENT SENSOR CT7736	φ33 mm, 200 A*
AC/DC AUTO-ZERO CURRENT SENSOR CT7742	φ55 mm, 2000 A
AC FLEXIBLE CURRENT SENSOR CT7044	φ100 mm, 5000 A*
AC FLEXIBLE CURRENT SENSOR CT7045	φ180 mm, 5000 A*
AC FLEXIBLE CURRENT SENSOR CT7046	φ254 mm, 5000 A*

* Maximum measurable current when used with the LR8513.
 For more detailed information about sensors and output cords, please refer to p.44 & p.45.


- Clamp
- Insulation
- DIEMS
- Detectors
- Earth
- Power quality
- Power consumption
- Battery
- PV
- Logger
- LAN
- Signal
- Lux
- Temperature
- Sound

LAN Cable Testers


LAN CABLE HiTESTER 3665



Product warranty for 3 years
Accuracy guaranteed for 1 year



Display wire map, cable length, and ID of connected terminal




Pins 3 and 6 have been incorrectly paired with Pins 4 and 5

Accessories

- TERMINATOR 9690 (ID 0)
- Carrying case
- LR6 alkaline battery x 2
- Instruction manual

Order code **3665**

Options	
1	TERMINATOR 9690-01 ID 1 to 5
2	TERMINATOR 9690-02 ID 6 to 10
3	TERMINATOR 9690-03 ID 11 to 15
4	TERMINATOR 9690-04 ID 16 to 20
5	CARRYING CASE 9249



Measurement	Measurable cable	Twisted-pair cable, characteristic impedance: 100 Ω, shielded and unshielded, CAT 3, 4, 5, 5e and 6	
	Compatible connectors	RJ-45 plugs	
	Measurement parameters	Wire Map test (Detectable errors)	Open, short, reversed, transposed, split pairs and other incorrect wiring
		Cable length	2.0 to 300.0 m Accuracy: ±4% rdg ± 1 m
Other	Direction	Up to 21 cables can be identified ¹	
	Functions	Backlight, auto power off	
	Operating temperature	0°C to 40°C, 80% rh or less (non-condensating)	
	Storage temperature	-10°C to 50°C, 80% rh or less (non-condensating)	
	Standards	EN61010 (Safety), EN61326 (EMC)	
	Power supply	LR6 alkaline battery x 2	
	Continuous operating time	50 hours	
	Dimensions (W x H x D)	85 x 130 x 33 mm (3.35 x 5.12 x 1.30 in)	
Mass	160 g (5.6 oz)		

¹Using the supplied Terminator 9690 and optional Models 9690-01 to 9690-04

Signal Generators

DC SIGNAL SOURCE SS7012



Product warranty for 3 years
Accuracy guaranteed for 1 year



Instrumentation system loop test:

- Verify the sensor output of 2-wire transmission sensors
- Verify distributor operation

Accessories

- INPUT CORD 9168
- TEST LEAD L9170-10
- Spare fuse
- LR6 alkaline battery x 4
- Instruction manual

Order code **SS7012**

Options	
1	INPUT CORD 9168
2	TEST LEAD L9170-10
3	TEMPERATURE PROBE 9184
4	COMMUNICATION PACKAGE SS9000 for reference contact compensation
5	CARRYING CASE 9782
6	CARRYING CASE 9380
7	AC ADAPTER 9445-02

Sourcing	Constant Voltage (CV)	0 to ±2.5000 V Accuracy: ±0.03% of setting ±300 μV 0 to ±25.000 V Accuracy: ±0.03% of setting ±3 mV
	Constant Current (CC)	0 to ±25.000 mA Accuracy: ±0.03% of setting ±3 μA
	Thermoelectromotive Force (TC: 0°C) (TC: RJ)	(K) -174.0°C to 1372.0°C (E) -220.0°C to 839.0°C (J) -208.0°C to 1108.0°C (T) -169.0°C to 400.0°C (R) -50°C to 1768°C (S) -50°C to 1768°C (B) 300°C to 1820°C (N) -113.0°C to 1300.0°C Accuracy: ±0.05% of setting ±0.5°C
	Memory Sourcing (RECALL, SCAN)	One type for each function: CV2.5, CV25, CC, TC (0°C and RJ)
Measurement	Standard Resistance (Rs)	100 Ω
	Voltage	0 V to ±2.8000 V (Accuracy: ±0.03% rdg ±300 μV) 0 V to ±28.000 V (Accuracy: ±0.03% rdg ±3 mV)
	Current	0 A to ±28.000 mA (Accuracy: ±0.03% rdg ±3 μA)
	Temperature	-25.0 to 80.0°C (Accuracy: ±0.5°C at 23 ±5 °C)
Other	Interfaces	USB Communication
	Operating temperature	0°C to 40°C, 80% rh or less (non-condensating)
	Storage temperature	-20°C to 50°C, 80% rh or less (non-condensating)
	Standards	EN61010 (Safety), EN61326 (EMC)
	Power supply	LR6 alkaline battery x 4 HR6 Ni-MH batteries Z0101 AC ADAPTER 9445-02/-03
Dimensions (W x H x D)	104 x 180 x 58 mm (4.09 x 7.09 x 2.28 in)	
Mass	570 g (20.1 oz) without batteries	



Lux Testers

LUX METER FT3424, FT3425



Product warranty for 3 years

Accuracy guaranteed for 2 years, Post-adjustment accuracy guaranteed for 2 years



FT3424

FT3425



Please see www.hioki.com for list of supported regions.



Extension cart minimizes physical stress



- Built-in Bluetooth® wireless technology
- Verify and record measured data with free GENNECT Cross mobile app
- *Available only with products displayed with the GENNECT Cross icon

Order code **FT3424**

Order code **FT3425**

Measurement	Standards	DIN 5032-7: 1985 Class B/JIS C 1609-1: 2006 General Class AA
	Light receiving element	Silicon photo-diode
	Measurement ranges	20.00 lx/200.0 lx/2000 lx/20000 lx/200000 lx
	Linearity	±2% rdg ⁻¹
	D/A output	Output level: 2 V / range f.s. Output accuracy: ±1% rdg ±5 mV (at output rate)
Other	Functions	Timer hold function, memory function (up to 99 measured data can be saved.), hold, auto power off, buzzer sound, backlight, zero adjustment
	Interfaces	USB2.0 (FT3425 only: Bluetooth® 4.0LE)
	Operating temperature	-10°C to 40°C, 80% RH or less (non-condensating)
	Storage temperature	-20°C to 50°C, 80% RH or less (non-condensating)
	Accuracy guarantee for temperature and humidity	21°C to 27°C, 75% RH or less (non-condensating)
	Dustproof and waterproof	IP40 (EN60529)
	Standards	EN61010 (Safety), EN61326 (EMC) JIS C 1609-1: 2006 General Class AA·DIN 5032-7: 1985 Class B
	Power supply	LR6 alkaline battery × 2, or USB bus power (5 V DC)
	Continuous operating time	300 hours (Bluetooth® communication OFF)
	Dimensions (W × H × D)	78 × 170 × 39 mm (3.07 × 6.69 × 1.54 in)
Weight	FT3424: 310 g (10.9 oz), FT3425: 320 g (11.3 oz)	

* Multiply by 1.5 for display values in excess of 3000 lx.

Accessories

- CARRYING CASE
- LR6 alkaline battery × 2
- Sensor cap (with strap)
- Strap
- USB cable (0.9 m)
- CD-R (USB driver, dedicated computer application software, and communications specifications)
- Instruction manual
- Precautions Concerning Use of Equipment that Emits Radio Waves (only FT3425)

Options

1	EXTENSION CART Z5023	
2	CONNECTION CABLE L9820	
3	CARRYING CASE C0202	Soft case
4	CARRYING CASE C0201	Semi-hard case
5	OUTPUT CORD L9094	Mini plug to banana 1.5 m (4.92 ft)
6	OUTPUT CORD L9095	Connect to BNC terminal 1.5 m (4.92 ft)
7	OUTPUT CORD L9096	Connect to terminal block 1.5 m (4.92 ft)



Temperature Testers

INFRARED THERMOMETER FT3700-20, FT3701-20




Product warranty for 1 years
Accuracy guaranteed for 1 year




FT3700


FT3701



Measure the average temperature inside a circle whose diameter is defined by the two indicated points.



Measure areas that cannot be touched or unreachable locations due to moving parts

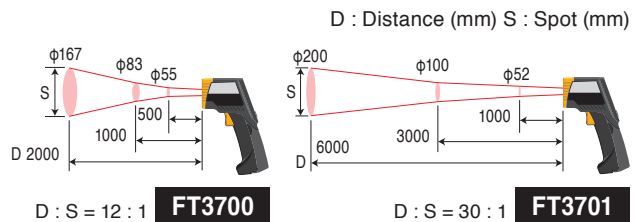

Measurement	Measurement range	FT3700: -60.0 to 550.0°C (-76 to 1022°F) ¹ FT3701: -60.0 to 760.0°C (-76 to 1400°F) ¹
	Accuracy	0.0 to 100.0°C (-32.0 to 212.0°F): ±2°C 100.1 to 500.0°C (212.1 to 932.0°F): ±2% rdg -35.0 to -0.1°C (-31.0 to 31.9°F): ±10% rdg ±2°C ⁻²
Other	Measurement field diameter	FT3700: φ83 mm at 1000 mm FT3701: φ100 mm at 3000 mm
	Functions	MAX/MIN/DIF (MAX-MIN)/AVG measurement, alarm, backlight, continuous measurement mode, auto power off
Other	Operating temperature	0°C to 50°C, 80% RH or less (non-condensating)
	Storage temperature	-10°C to 50°C, 80% RH or less (non-condensating) 50°C to 60°C, 70% RH or less (non-condensating)
	Accuracy guarantee for temperature and humidity	23°C ±3°C, 80% RH or less (non-condensating)
	Standards	IEC 60825-1 CLASS2 (Laser), EN61326 (EMC)
	Power supply	LR03 alkaline battery × 2
	Continuous operating time	140 hours
	Dimensions (W × H × D)	48 × 172 × 119 mm (1.89 × 6.77 × 4.69 in)
Weight	256 g (9.0 oz)	

¹ Guaranteed accuracy range is -35 to 500°C.
⁻² -60.0 to -35.1°C (-76.0 to -31.1°F) : Accuracy not specified

Accessories

- CARRYING CASE
- LR03 alkaline battery × 2
- Instruction manual

Order code **FT3700-20**

Order code **FT3701-20**

Sound Testers



SOUND LEVEL METER FT3432

Product warranty for 3 years
Accuracy guaranteed for 1 year, Post-adjustment accuracy guaranteed for 1 year




Accessories

- Wind screen WS-14
- Hand strap VM-63-017
- Silicon cover NL-27-089
- Windscreen fall out prevention rubber NL-27-014
- LR03 alkaline batteries × 2
- CARRYING CASE 9757
- Instruction manual

Options

1	AC MONITOR OUTPUT CABLE CC-98A
2	DC OUTPUT CABLE CC-98D
3	SOUND LEVEL METER TRIPOD ST-80
4	TRIPOD EXTENSION ROD ST-80-100
5	CARRYING CASE 9757

Order code **FT3432**



CC-98

ST-80

9757

Measurement	Measurement functions	Sound level, Equivalent continuous sound level, Sound exposure level, Maximum Sound level, C weighting peak sound level ¹
	Measurement times	1/5/10 minutes, or 1 hour
	Frequency weighting characteristics	A weighting, or C weighting
	Measurement level range	Wide range [A] 30 dB to 137 dB [C] 36 dB to 137 dB Peak range [A] 65 dB to 137 dB [C] 65 dB to 137 dB
	Frequency range	20 Hz to 8000 Hz
	Microphone	1/2-inch electret condenser microphone
	Time weighting characteristics	Fast, Slow
	Functions	Storing processing results (Storing capacity: 199 pieces of data), warning indications, bar graph
	Output	DC output connector: DC output: 3 V (full scale), 25 mV/dB AC monitor output connector: 1Vrms + 600 mVrms, -400 mVrms ²
	Operating temperature	-10°C to 50°C, 10 to 90% RH or less (non-condensating)
Other	Storage temperature	-10°C to 50°C, 10 to 90% RH or less (non-condensating)
	Standards	IEC 61672-1: 2013 Class 2 JIS C 1509-1: 2017 Class 2 JIS C 1516:2014 Class 2
	Power supply	LR03 alkaline battery × 2
	Continuous operating time	9 hours (at wide range)
	Dimensions (W × H × D)	63 × 120 × 23.5 mm (2.48 × 4.72 × 0.93 in)
Weight	105 g (3.7 oz)	

¹ Measurement possible only when peak range is selected

² Output voltage upper limit: 1.8 Vrms

Clamp

Insulation

DIMMS

Detectors

Earth

Power quality

Power consumption

Battery

PV

Logger

LAN

Signal

Lux

Temperature

Sound

Product warranties **HIOKI products are generally covered by a three-year warranty.**

Product warranty

In the event HIOKI is responsible for the failure of a product during the warranty term beginning on the date of purchase (or beginning in the month the product was manufactured if the date of purchase is unclear), we will repair or replace the product free of charge.

(**Warranty scope:** We check products on a standalone basis to verify their specifications, performance, and functionality. Although we verify proper operation of components that are connected to HIOKI products in standard configurations, we ask that customers verify proper operation of their HIOKI products when connected to other manufacturers' products. The scope of HIOKI's warranty is limited to HIOKI products. Connected devices and issues caused by connected devices are considered outside the scope of the warranty. In the event of physical damage, any compensation that might be provided by HIOKI is limited to the purchase price of the product.)

Accuracy guarantee

For products with an accuracy guarantee, we guarantee the level of accuracy indicated in the specifications for a certain period of time following shipment from the factory. In the event of an accuracy defect during that period of time, we will adjust the product free of charge.

Calibration, adjustment, and repair service

Calibrated products

No warranty term is provided. The period of time for which a calibration is considered valid must be determined by the customer. Calibration includes a statement of values as of the date of calibration as calibration results.

Calibration interval : We suggest a product-specific accuracy guarantee term as the recommended calibration interval.

Adjusted products

If an adjusted product falls out of accuracy during the post-adjustment accuracy guarantee term, we will readjust it free of charge.

Guarantee term : The post-adjustment accuracy guarantee term is determined on a product-by-product basis. With some exceptions, we offer a post-adjustment accuracy guarantee for the duration of the recommended accuracy interval. The month of adjustment serves as the starting point when calculating the duration of the guarantee.

Guarantee conditions : The post-adjustment accuracy guarantee is intended to guarantee the accuracy of measured values. It is not a product warranty. If the product's falling out of accuracy is the result of the service life or deterioration of a part, the customer will be charged for the repair. If the product's falling out of accuracy is deemed likely to be the result of damage or the environment in which the product was operated or stored, the customer will be charged for the repair. If we conclude that a product received from a customer is likely to fall out of accuracy after shipment, we may contact the customer and decline to provide a post-adjustment accuracy guarantee. These terms apply to calibration and adjustment performed at HIOKI E.E. CORPORATION headquarters.

Repaired products

If, within six months of the original repair, HIOKI is responsible for an issue requiring an additional repair (a repair of the same issue) of a product that has been used as described in its user manual, we will repair it free of charge.

Repair term : We may improve products or switch models without notice in order to enhance the competitiveness of our products and our productivity. We will repair discontinued products for a minimum of five years from the date of their discontinuation, although we may elect to propose that the customer switch to an alternative model if it is difficult to repair a product due to social or economic conditions.

*Once five years have passed since a product's discontinuation, we will only accept inspection and calibration requests for that product if we are able to perform that work in-house.

Quality of HIOKI's calibration, adjustment, and repair service



80 years of history and fine-grained, expert service

Technicians performing calibration, adjustment, and repair work undergo in-house training to ensure they possess the specialized expertise and skills that such work demands. We carry out rigorous inspections that extend from product functionality to accessories, including to assess potential wiring breaks in probes, remaining battery life, and display performance.

Precise calibration and adjustment guidelines compiled by product designers

We determine everything from the procedures for measuring instrument functionality checks to calibration points based on the results of reviews conducted by designers who are well versed in the characteristics of products' internal circuitry and the principles that underlie their operation. In this way, we are able to provide optimal, extensive calibration and adjustment service as only the manufacturer can.


Highly reliable service that's traceable to national standards

The standard devices we use to calibrate and adjust products are all linked to national standards, ensuring that we can issue inspection reports with accurate, reliable calibrated values.

Comprehensive calibration, adjustment, and repair service with fast turnaround


If we discover a malfunction or failure during the calibration process, we'll contact you to let you know where the problem is and what's necessary to address it. If you wish, we'll then repair the product. This capability eliminates unnecessary back-and-forth so you can put your product back to work as soon as possible.

Traceability Chart

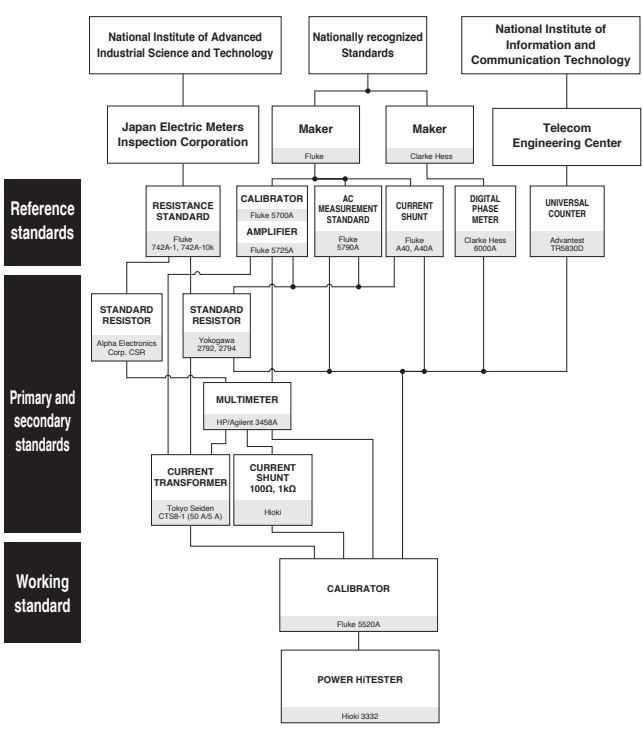

Calibration, Adjustment and Repair Service

(1) Service content

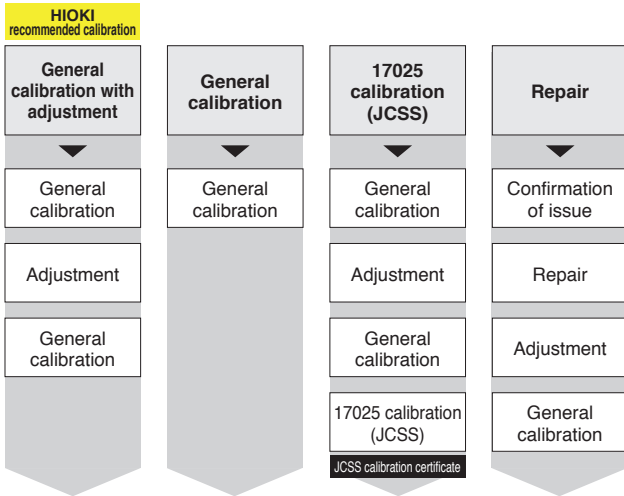

- JCSS calibration is also available as a standalone service. (HIOKI recommends that customers have general calibration with adjustment performed prior to JCSS calibration of their instrument.)
- Products can be bundled with JCSS calibration at the time of purchase.
- Customers can also specify calibration points. We will provide a list of supported calibration points and ask that customers specify points as desired from that list.

(2) Documents we can issue and their content

Inspection report	General calibration certificate
<ul style="list-style-type: none"> Calibration results Judgment 	<ul style="list-style-type: none"> Calibration certificate declaration Information about equipment used in calibration
JCSS calibration certificate	Traceability certificate (special-order)
<ul style="list-style-type: none"> Calibration results Coverage factor Calibration certificate declaration ilac-MRA, IA Japan, and JCSS logos 	<ul style="list-style-type: none"> Calibration certificate declaration Information about lighting standards
Traceability chart (overall)	Traceability chart (model-specific)
An overview tracing HIOKI product groups to national standards via individual standard devices	A detailed diagram tracing a particular product model to national standards via individual standard devices

(3) Applying for calibration, adjustment, or repair service

From the distributor where you purchased the product Download the "Repair/Calibration Request Form" from the HioKI website, then complete the required information and take the form along with your instrument to the distributor from whom you purchased the product. If you wish to receive a quotation before requesting service, please send just the "Repair/Calibration Request Form" to the distributor. (For distributor information, please contact your nearest HioKI subsidiary.)

Repair/Calibration Request Form Available from the HIOKI website:
 > Technical Support > Repair and Calibration
 > Requesting Repair and Calibration Service



Calibration

Calibration provides a way to check the condition of a measuring instrument by comparing the ideal value indicated by a standard device with the value indicated by the instrument being calibrated.

Adjustment

Adjustment corrects for the difference between the ideal value indicated by a standard device and the value indicated by the instrument being adjusted. HIOKI recommends that calibration and adjustment be performed together. Adjustment lets you use your instrument with ideal values.

*Products that have undergone adjustment are covered by a post-adjustment accuracy guarantee.

General calibration only	General calibration and adjustment
Although the instrument may perform to tolerance at the time of calibration, it may fall out of tolerance subsequently.	By adjusting the instrument at the time of calibration, it is possible to compensate for divergence from true values so that the performance of the instrument can be maintained subsequently.



HIOKI products are designed so that they will not fall out of tolerance before the calibration interval is up as long as calibration with adjustment is performed at the recommended calibration interval and the instrument is used and stored under the specified environmental conditions. If an instrument falls out of tolerance, it may be due to an issue that needs to be repaired.

Difference between general calibration and 17025 calibration (JCSS)

NITE (National Institute of Technology and Evaluation)
 IA Japan (an NITE-accredited center)
 JCSS (Calibration Certification System for calibration service providers under the Measurement Act)
 International MRA (international mutual recognition agreement)

Calibration service provider
 Screening and registration
 Issuance

Internationally recognized calibration certificate

This is the mark of the calibration service provider registration program based on the Measurement Act. JCSS-registered service providers are registered under the ISO/IEC 17025 standard. HIOKI E.E. CORPORATION is an international MRA-capable JCSS-accredited service provider. HIOKI's accreditation number is JCSS 0156.


JCSS calibration is a type of third-party-accredited calibration based on ISO/IEC 17025. General calibration is a type of calibration determined by HIOKI based on ISO 9001. HIOKI can issue calibration certificates bearing the JCSS mark for instruments that have undergone JCSS certification, and they are valid internationally since they are international MRA-compliant.

Differences in calibration points	
General calibration	17025 calibration (JCSS)
Calibration is performed for all parameters that need to be checked in order to maintain the performance of the measuring instrument as determined by the product designer.	Calibration is performed using points registered as the JCSS calibration range and selected by the customer.
Differences in information on calibration documents	
General calibration	17025 calibration (JCSS)
<ul style="list-style-type: none"> Calibration results: Included on inspection report Inaccuracies: Not included Traceability chart: Yes 	<ul style="list-style-type: none"> Calibration results: Included on calibration certificate Inaccuracies: Included on calibration certificate Traceability chart: No (*JCSS and other logos certify traceability.)

Service capability and warranty duration

You can find out whether HIOKI accepts repair and calibration requests for your instrument, associated lead times if so, and the information listed below simply by entering the product model number on HIOKI's website.

	Availability of repair and calibration service
	Recommended Calibration Interval
	Post-adjustment accuracy guarantee period
	Product warranty period
	Date production discontinued

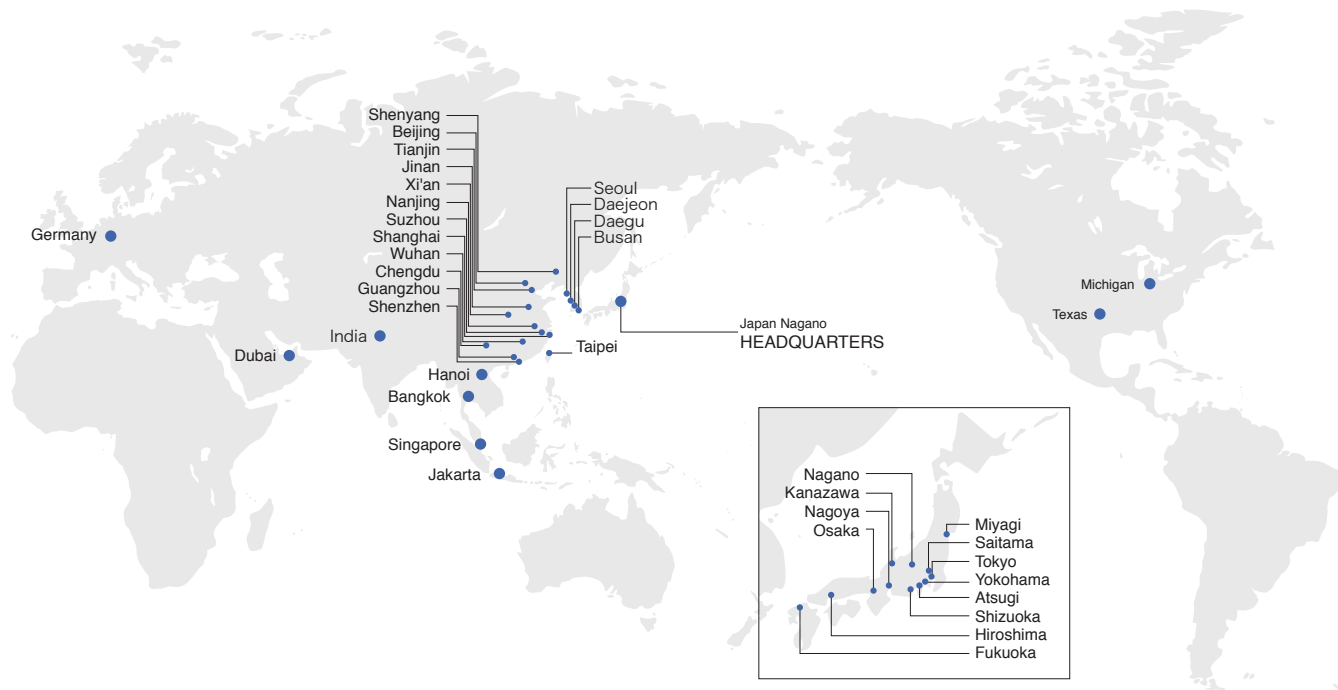

Global sales network

Japan Bases	
	HEADQUARTERS : HIOKI E. E. CORPORATION (Nagano)
	Tohoku Sales Branch (Miyagi)
	Nagano Sales Branch
	Kanazawa Sales Branch
	Kita-Kanto Sales Branch (Saitama)
	Greater Tokyo Sales Branch
Japan	Yokohama Sales Branch
	Atsugi Office
	Shizuoka Sales Branch
	Nagoya Sales Branch
	Osaka Sales Branch
	Hiroshima Office
	Fukuoka Sales Branch
Representative Offices	
China	Tianjin Representative Office (Shanghai)
UAE	MEA Representative Office (DUBAI)
Overseas Bases	
America	HIOKI USA CORPORATION (Plano, TX)
	HIOKI USA CORPORATION Michigan Office (Novi, MI)
	HIOKI (Shanghai) MEASUREMENT TECHNOLOGIES CO., LTD. (Shanghai)
	HIOKI (Shanghai) Technology Development Co., LTD. (Shanghai)
	HIOKI (Shanghai) MEASURING INSTRUMENTS CO., LTD. (Shanghai)
	HIOKI (Shanghai) MEASUREMENT TECHNOLOGIES CO., LTD. Beijing Representative Office
	HIOKI (Shanghai) MEASUREMENT TECHNOLOGIES CO., LTD. Guangzhou Representative Office
	HIOKI (Shanghai) MEASUREMENT TECHNOLOGIES CO., LTD. Shenzhen Representative Office
China	HIOKI (Shanghai) MEASUREMENT TECHNOLOGIES CO., LTD. Chengdu Representative Office
	HIOKI (Shanghai) MEASUREMENT TECHNOLOGIES CO., LTD. Suzhou Representative Office
	HIOKI (Shanghai) MEASUREMENT TECHNOLOGIES CO., LTD. Shenyang Representative Office
	HIOKI (Shanghai) MEASUREMENT TECHNOLOGIES CO., LTD. Xi'an Representative Office
	HIOKI (Shanghai) MEASUREMENT TECHNOLOGIES CO., LTD. Wuhan Representative Office
	HIOKI (Shanghai) MEASUREMENT TECHNOLOGIES CO., LTD. Jinan Representative Office
	HIOKI (Shanghai) MEASUREMENT TECHNOLOGIES CO., LTD. Nanjing Representative Office
Singapore	HIOKI SINGAPORE PTE. LTD. (Singapore)
Thailand	HIOKI SINGAPORE PTE. LTD. Thailand Representative Office
Vietnam	HIOKI SINGAPORE PTE. LTD. Vietnam Representative office
Indonesia	PT. HIOKI ELECTRIC INSTRUMENT (Jakarta)
	HIOKI KOREA CO., LTD. (Seoul)
Korea	HIOKI KOREA CO., LTD. Daejeon Office
	HIOKI KOREA CO., LTD. Busan Office
	HIOKI KOREA CO., LTD. Daegu Office
India	HIOKI INDIA PRIVATE LIMITED
Germany	HIOKI EUROPE GmbH
Taiwan	HIOKI TAIWAN CO., LTD. (Taipei)

**The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by HIOKI E.E. CORPORATION is under license.
Note: Company names and product names appearing in this brochure are trademarks or registered trademarks of various companies.*

HIOKI
HIOKI E. E. CORPORATION

HEADQUARTERS

81 Koizumi,
Ueda, Nagano 386-1192 Japan
<https://www.hioki.com/>



Scan for all regional contact information

DISTRIBUTED BY